


MICRO-STAR INTERNATIONAL CO., LTD.

MS - 5 1 0 6

Processor	Pentium
Processor Speed	90/100MHz
Chip Set	Intel
Max. Onboard DRAM	128MB
Cache	256/512KB
BIOS	Award
Dimensions	330mm x 218mm
I/O Options	32-bit PCI slots (4)
NPU Options	None

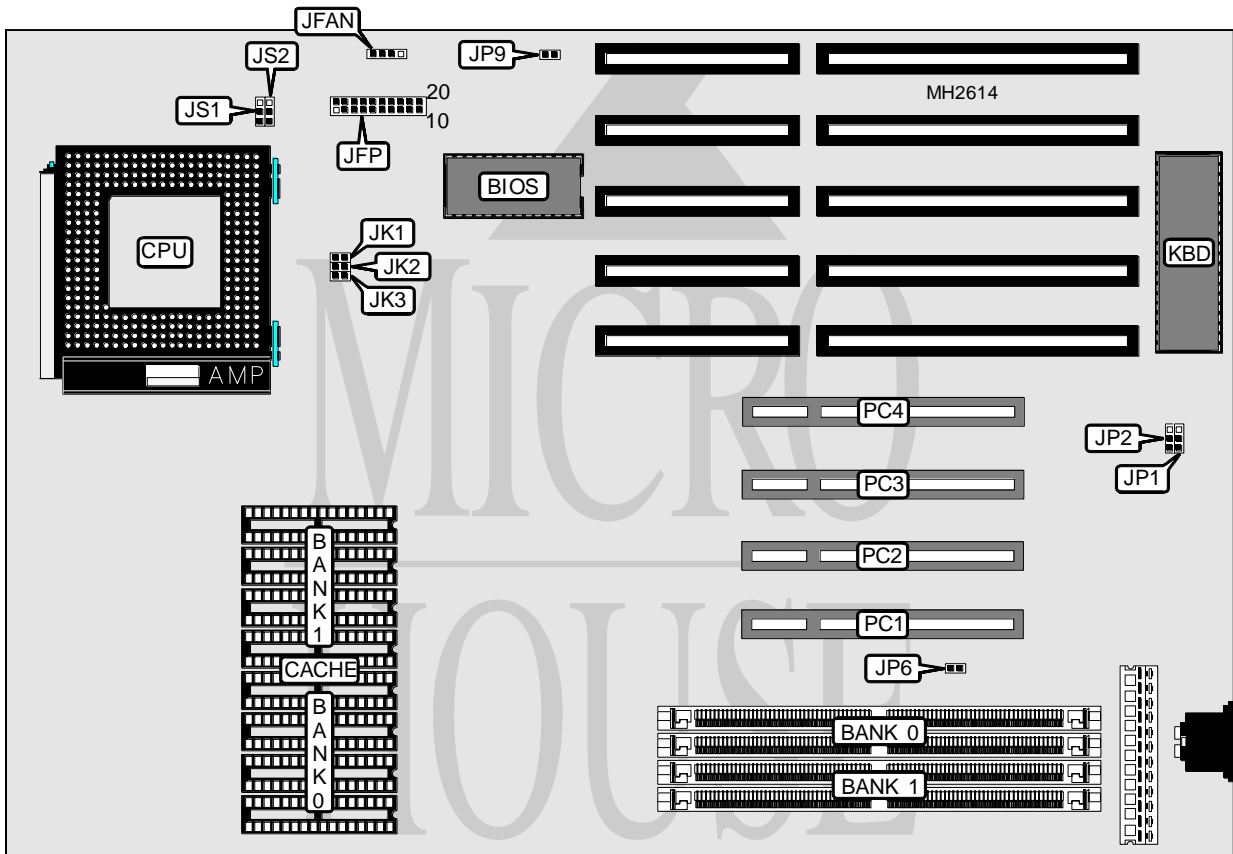

CONNECTIONS			
Purpose	Location	Purpose	Location
Chassis fan power	JFAN	Turbo switch	JFP pins 15 - 17
Power LED & keylock	JFP pins 1 - 5	Reset switch	JFP pins 19 - 20
Speaker	JFP pins 6 - 10	32-bit PCI slots	PC1 - PC4
Turbo LED	JFP pins 12 - 13		

Continued on next page . . .

MICRO-STAR INTERNATIONAL CO., LTD.
MS - 5 1 0 6

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í PCI card type select any card installed	JP6	pins 1 & 2 closed
PCI card type select MS-3805 card installed	JP6	pins 2 & 3 closed
í CMOS memory normal operation	JP9	Open
CMOS memory clear	JP9	Closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 256K x 36	NONE
4MB	(2) 256K x 36	(2) 256K x 36
4MB	(2) 512K x 36	NONE
6MB	(2) 256K x 36	(2) 512K x 36
6MB	(2) 512K x 36	(2) 256K x 36
8MB	(2) 512K x 36	(2) 512K x 36
8MB	(2) 1M x 36	NONE
10MB	(2) 256K x 36	(2) 1M x 36
10MB	(2) 1M x 36	(2) 256K x 36
12MB	(2) 512K x 36	(2) 1M x 36
12MB	(2) 1M x 36	(2) 512K x 36
16MB	(2) 2M x 36	NONE
16MB	(2) 1M x 36	(2) 1M x 36
18MB	(2) 256K x 36	(2) 2M x 36
18MB	(2) 2M x 36	(2) 256K x 36
20MB	(2) 512K x 36	(2) 2M x 36
20MB	(2) 2M x 36	(2) 512K x 36
24MB	(2) 1M x 36	(2) 2M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36
32MB	(2) 4M x 36	NONE
34MB	(2) 256K x 36	(2) 4M x 36
34MB	(2) 4M x 36	(2) 256K x 36
36MB	(2) 512K x 36	(2) 4M x 36
36MB	(2) 4M x 36	(2) 512K x 36
40MB	(2) 1M x 36	(2) 4M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 2M x 36	(2) 4M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36
64MB	(2) 8M x 36	NONE
66MB	(2) 256K x 36	(2) 8M x 36
66MB	(2) 8M x 36	(2) 256K x 36
68MB	(2) 512K x 36	(2) 8M x 36
68MB	(2) 8M x 36	(2) 512K x 36
72MB	(2) 1M x 36	(2) 8M x 36

Continued next page...

MICRO-STAR INTERNATIONAL CO., LTD.
MS - 5 1 0 6

... continued from previous page

DRAM CONFIGURATION (CON'T)		
Size	Bank 0	Bank 1
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 2M x 36	(2) 8M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 4M x 36	(2) 8M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
256KB	(4) 32K x 8	(4) 32K x 8
512KB	(4) 64K x 8	(4) 64K x 8

CACHE JUMPER CONFIGURATION		
Size	JS1	JS2
256KB	pins 1 & 2 closed	pins 2 & 3 closed
512KB	pins 2 & 3 closed	pins 2 & 3 closed

CPU SPEED CONFIGURATION			
Speed	JK1	JK2	JK3
90MHz	Closed	Open	Open
100MHz	Closed	Closed	Open

PCI INTERRUPT CONFIGURATION (IRQ14)	
Setting	JP1
Edge rising	pins 1 & 2 closed
Edge falling	pins 2 & 3 closed

PCI INTERRUPT CONFIGURATION (IRQ15)	
Setting	JP2
Edge rising	pins 1 & 2 closed
Edge falling	pins 2 & 3 closed