


ACER, INC.

RT-386-33/25

Processor	80386DX
Processor Speed	25/33MHz
Chip Set	C & T
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit external memory card
NPU Options	80387DX

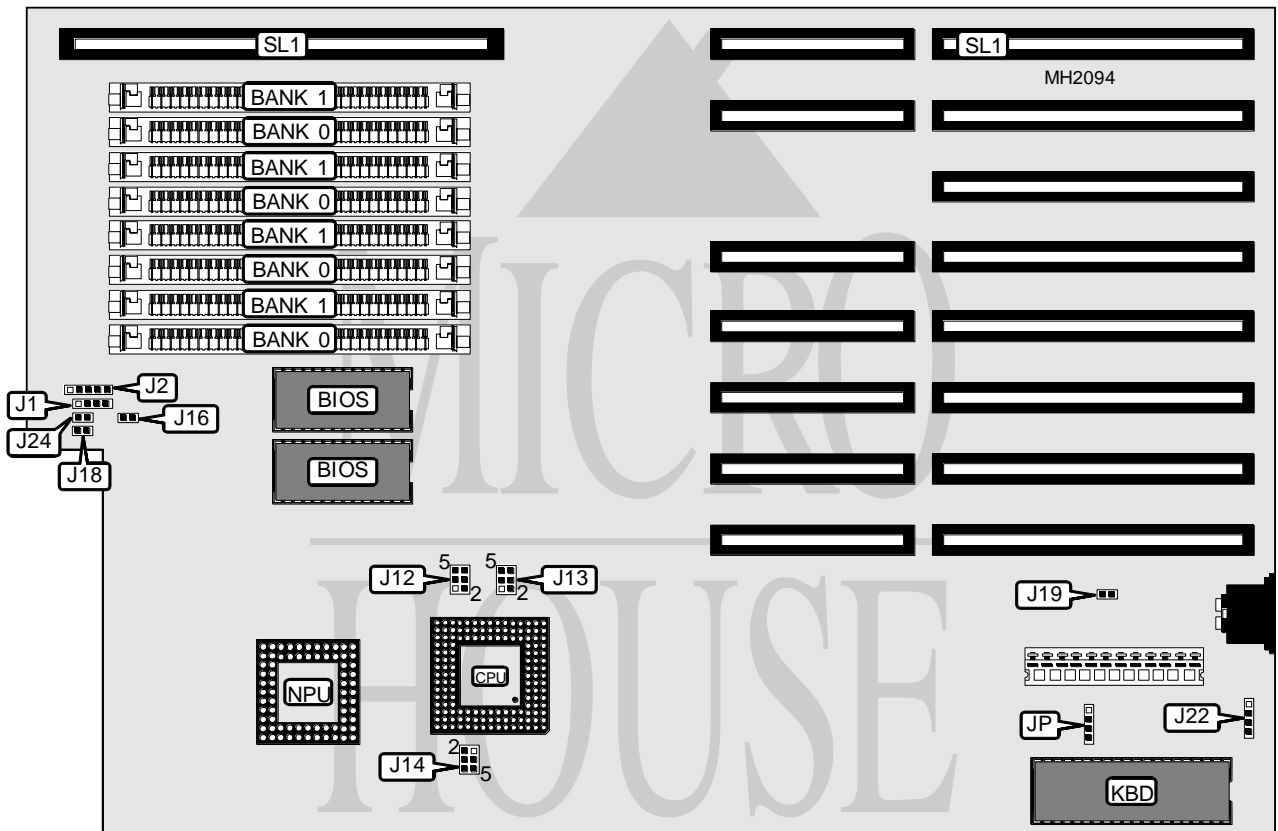

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	External battery	J22
Power LED & keylock	J2	Turbo switch	J24
Turbo LED	J16	32-bit external memory card	SL1
Reset switch	J18		

Continued on next page...

ACER, INC.
RT-386-33/25

... continued from previous page.

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	J13	pins 1 & 3, 2 & 4 closed
í NPU disabled	J14	pins 3 & 5, 4 & 6 closed
NPU enabled	J14	pins 1 & 3, 2 & 4 closed
í Monitor type select color	J19	Closed
Monitor type select monochrome	J19	Open
í Turbo switch enabled	J24	Closed
Turbo switch disabled	J24	Open
í Factory configured - do not alter	JP	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9

DRAM JUMPER CONFIGURATION	
Size	J12
1M	pins 1 & 2, 3 & 4 closed
2M	pins 3 & 4 closed
4M	pins 1 & 2 closed
8M	Open