


BEK-TRONIC TECHNOLOGY, INC.

BEK-3739

Processor	80386DX/CX486DLC
Processor Speed	25/33/40MHz
Chip Set	OPTI
Max. Onboard DRAM	32MB
Cache	128KB
BIOS	AMI
Dimensions	220mm x 170mm
I/O Options	None
NPU Options	80387DX

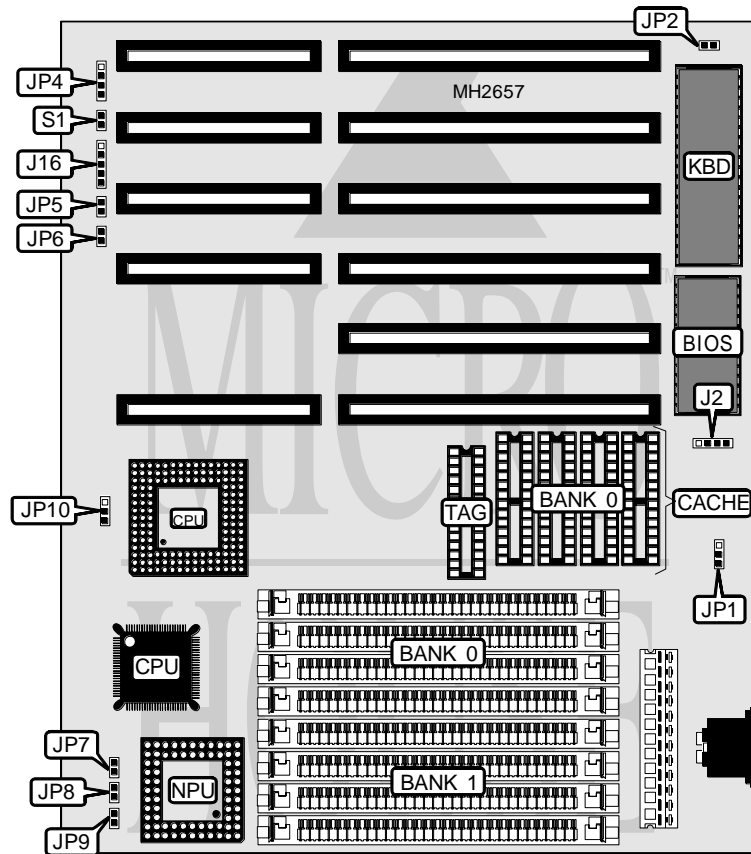

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J2	Turbo switch	JP5
Power LED & keylock	J16	Turbo LED	JP6
Speaker	JP4	Reset switch	S1

Continued on next page. . .

BEK-TRONIC TECHNOLOGY, INC.
B E K - 3 7 3 9

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JP1	pins 2 & 3 closed
CMOS memory clear	JP1	pins 1 & 2 closed
í Monitor type select color	JP2	Closed
Monitor type select monochrome	JP2	Open
í Factory configured - do not alter	JP10	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
5MB	(4) 256K x 9	(4) 1M x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
20MB	(4) 1M x 9	(4) 4M x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION		
Size	Bank 0	TAG
128KB	(4) 32K x 8	(1) 8K x 8

CPU SPEED CONFIGURATION			
Speed	JP7	JP8	JP9
25MHz	Open	Open	Closed
33MHz	Open	Closed	Closed
40MHz	Closed	Open	Open