


# IBM CORPORATION

## PS/2 MODEL 76 (TYPE 9576)

<b>Processor</b>	80486SX/80486DX2
<b>Processor Speed</b>	25/33/66(internal)MHz
<b>Chip Set</b>	IBM
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	MCA slot, floppy drive interface, SCSI connector, parallel port, PS/2 mouse port, serial ports (2)
<b>NPU Options</b>	None

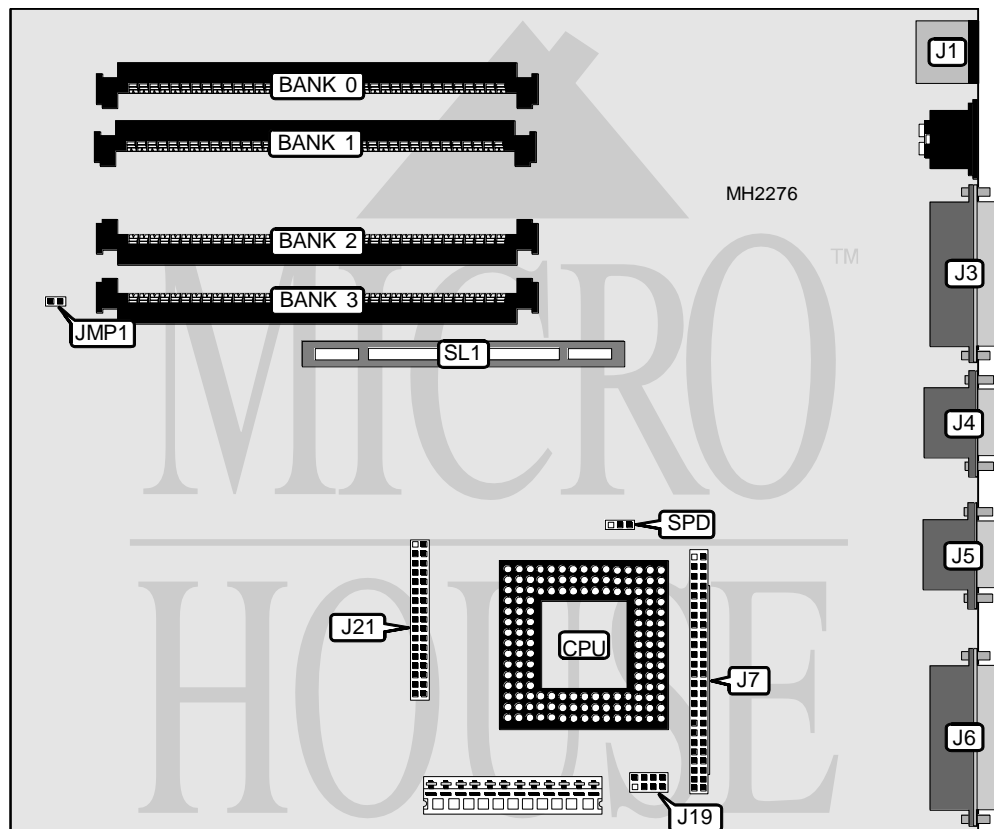

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	J1	SCSI interface	J7
Parallel port	J3	Control panel connector	J19
Serial port 1	J4	Floppy drive interface	J21
Serial port 2	J5	MCA slot	SL1
SCSI port	J6		

Continued on next page. . .

# IBM CORPORATION

## PS/2 MODEL 76 (TYPE 9576)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	JMP1	Open
CMOS memory clear	JMP1	Closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
4MB	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
4MB	(1) 1M x 36	NONE	NONE	NONE
5MB	(1) 1M x 36	(1) 256K x 36	NONE	NONE
6MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	NONE
7MB	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
8MB	(1) 1M x 36	(1) 1M x 36	NONE	NONE
12MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	NONE
16MB	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
16MB	(1) 4M x 36	NONE	NONE	NONE
17MB	(1) 4M x 36	(1) 256K x 36	NONE	NONE
18MB	(1) 4M x 36	(1) 256K x 36	(1) 256K x 36	NONE
19MB	(1) 4M x 36	(1) 256K x 36	(1) 256K x 36	(1) 256K x 36
20MB	(1) 4M x 36	(1) 1M x 36	NONE	NONE
21MB	(1) 4M x 36	(1) 1M x 36	(1) 256K x 36	NONE
22MB	(1) 4M x 36	(1) 1M x 36	(1) 256K x 36	(1) 256K x 36
24MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	NONE
25MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	(1) 256K x 36
28MB	(1) 4M x 36	(1) 1M x 36	(1) 1M x 36	(1) 1M x 36
32MB	(1) 4M x 36	(1) 4M x 36	NONE	NONE

CPU SPEED CONFIGURATION	
Speed	SPD
25MHz	pins 1 & 2 closed
33MHz	pins 2 & 3 closed
Note: Jumper SPD is only on SX based boards.	