


UNIDENTIFIED

486/33

| | |
|--------------------------|---------------|
| Processor | 80486DX |
| Processor Speed | 33MHz |
| Chip Set | OPTI |
| Max. Onboard DRAM | 32MB |
| Cache | None |
| BIOS | AMI |
| Dimensions | 330mm x 218mm |
| I/O Options | None |
| NPU Options | 4167 |

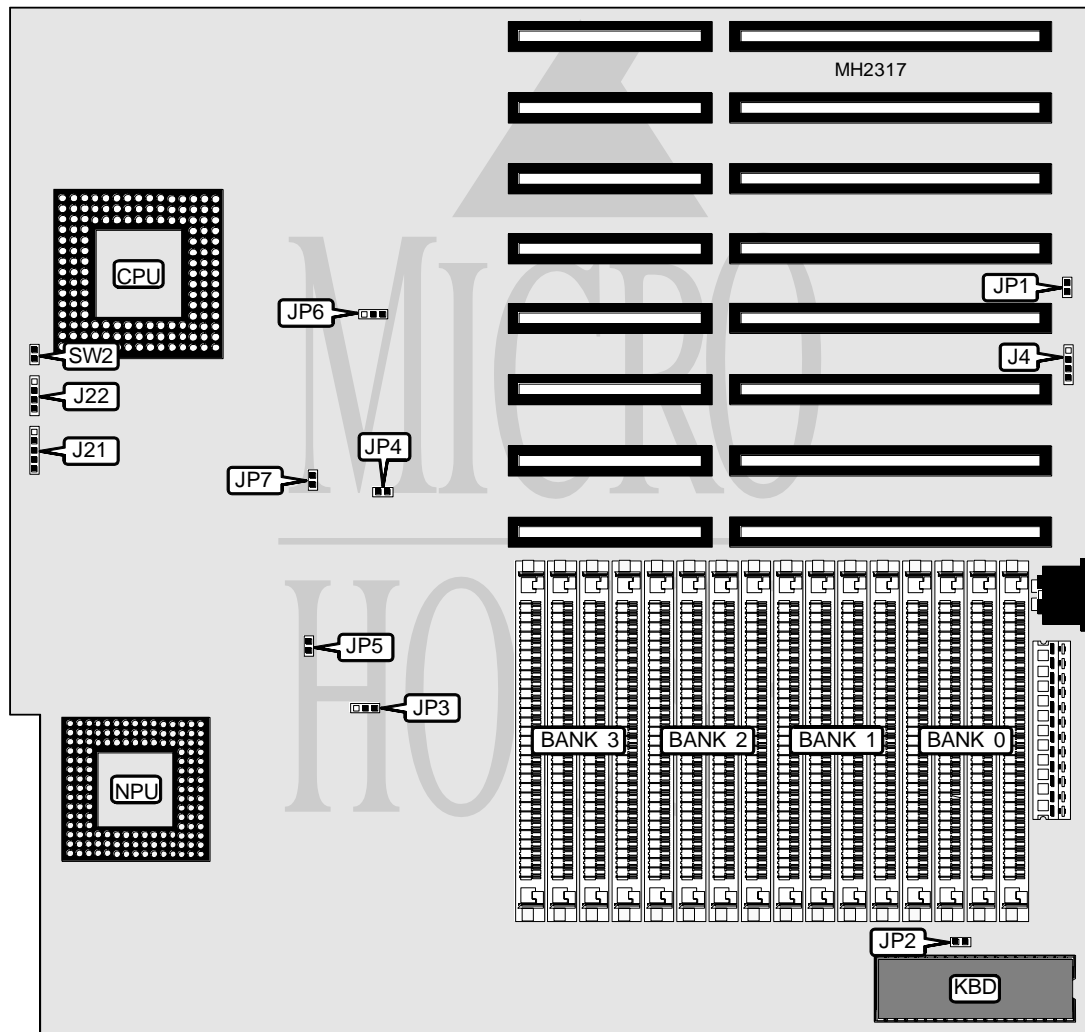

| CONNECTIONS | | | |
|---------------------|----------|--------------|----------|
| Purpose | Location | Purpose | Location |
| External battery | J4 | Speaker | J22 |
| Power LED & keylock | J21 | Reset switch | SW2 |

Continued on next page. . .

UNIDENTIFIED

486/33

... continued from previous page

| USER CONFIGURABLE SETTINGS | | |
|-------------------------------------|--------|-------------------|
| Function | Jumper | Position |
| í Battery type select internal | JP1 | Closed |
| Battery type select external | JP1 | Open |
| í Monitor type select monochrome | JP2 | Open |
| Monitor type select color enabled | JP2 | Closed |
| í Factory configured - do not alter | JP3 | pins 2 & 3 closed |
| í Factory configured - do not alter | JP4 | pins 1 & 2 closed |
| í Factory configured - do not alter | JP5 | Open |
| í Factory configured - do not alter | JP6 | pins 2 & 3 closed |
| í Factory configured - do not alter | JP7 | Open |

| DRAM CONFIGURATION | | | | |
|--------------------|--------------|--------------|--------------|--------------|
| Size | Bank 0 | Bank 1 | Bank 2 | Bank 3 |
| 1MB | (4) 256K x 9 | NONE | NONE | NONE |
| 2MB | (4) 256K x 9 | (4) 256K x 9 | NONE | NONE |
| 3MB | (4) 256K x 9 | (4) 256K x 9 | (4) 256K x 9 | NONE |
| 4MB | (4) 256K x 9 | (4) 256K x 9 | (4) 256K x 9 | (4) 256K x 9 |
| 4MB | (4) 1M x 9 | NONE | NONE | NONE |
| 6MB | (4) 256K x 9 | (4) 256K x 9 | (4) 1M x 9 | NONE |
| 8MB | (4) 1M x 9 | (4) 1M x 9 | NONE | NONE |
| 10MB | (4) 256K x 9 | (4) 256K x 9 | (4) 1M x 9 | (4) 1M x 9 |
| 16MB | (4) 1M x 9 | (4) 1M x 9 | (4) 1M x 9 | (4) 1M x 9 |
| 32MB | (4) 4M x 9 | (4) 4M x 9 | NONE | NONE |