


REPLY CORPORATION PROLINEA, VALUEPOINT, PS/1 PENTATHLON/PCI

Processor	Pentium
Processor Speed	75/90/100MHz
Chip Set	Unidentified
Max. Onboard DRAM	128MB
Cache	None
BIOS	Phoenix
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA port
NPU Options	None

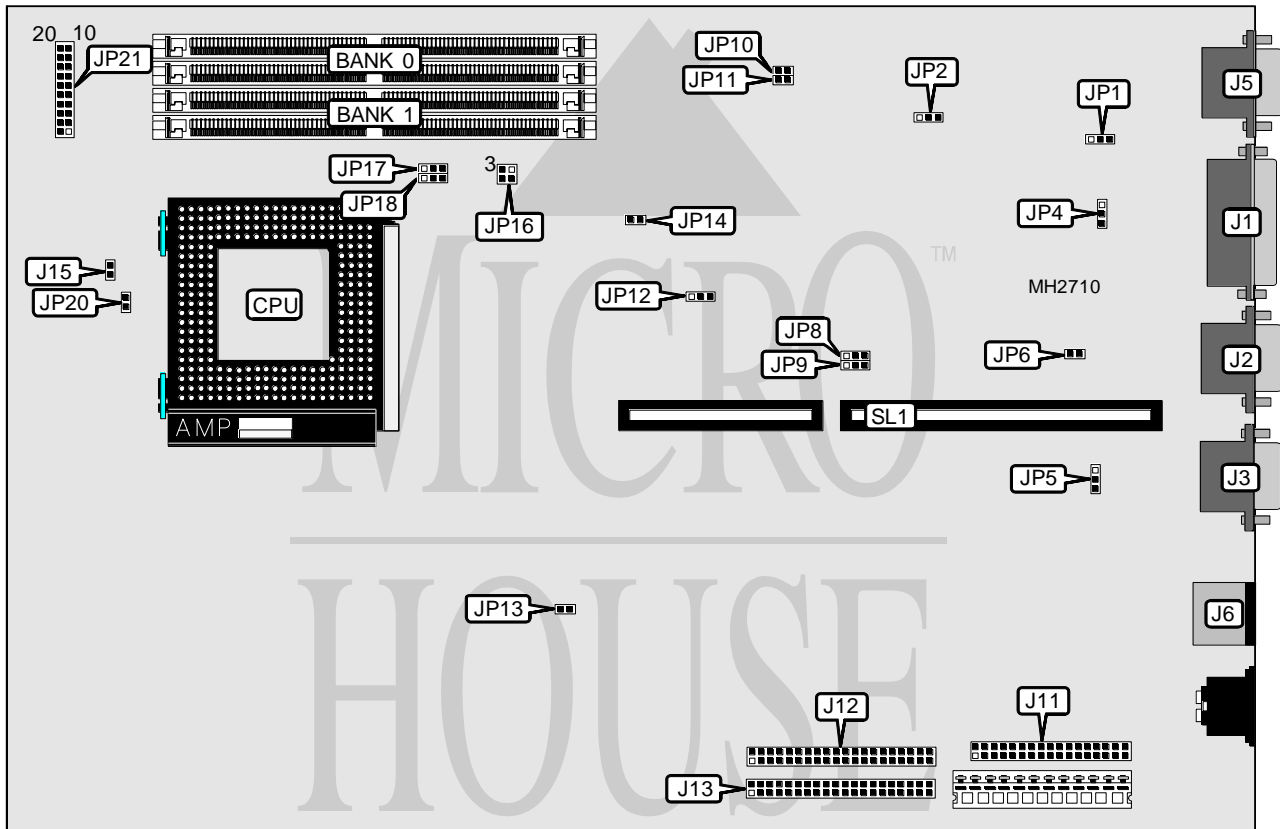

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	J1	IDE interface (secondary)	J12
Serial port 2	J2	IDE interface (primary)	J13
Serial port 1	J3	IDE interface LED	J15
VGA port	J5	Power LED	JP21 pins 2 & 3
PS/2 mouse port	J6	Riser Card	SL1
Floppy drive interface	J11		

Continued on next page...

REPLY CORPORATION

PROLINEA, VALUEPOINT, PS/1 PENTATHLON/PCI

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Factory configured - do not alter	JP1	pins 1 & 2 closed
í On board video enabled	JP2	pins 1 & 2 closed
On board video disabled	JP2	pins 2 & 3 closed
í Factory configured - do not alter	JP4	pins 1 & 2 closed
í Factory configured - do not alter	JP5	pins 2 & 3 closed
í CMOS memory normal operation	JP6	Open
CMOS memory clear	JP6	Closed
í Factory configured - do not alter	JP8	pins 1 & 2 closed
í Factory configured - do not alter	JP9	pins 1 & 2 closed
í Factory configured - do not alter	JP10	Open
í Factory configured - do not alter	JP11	Open
í Factory configured - do not alter	JP12	pins 1 & 2 closed
í Factory configured - do not alter	JP13	Open
í Factory configured - do not alter	JP17	pins 1 & 2 closed
í Factory configured - do not alter	JP18	pins 2 & 3 closed
í Factory configured - do not alter	JP20	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
4MB	(2) 512K x 36	NONE
8MB	(2) 512K x 36	(2) 512K x 36
8MB	(2) 1M x 36	NONE
16MB	(2) 1M x 36	(2) 1M x 36
16MB	(2) 2M x 36	NONE
32MB	(2) 2M x 36	(2) 2M x 36
36MB	(2) 512K x 36	(2) 4M x 36
48MB	(2) 2M x 36	(2) 4M x 36
64MB	(2) 4M x 36	(2) 4M x 36
64MB	(2) 8M x 36	NONE
128MB	(2) 8M x 36	(2) 8M x 36
128MB	(2) 16M x 36	NONE

Continued on next page. . .

REPLY CORPORATION
 PROLINEA, VALUEPOINT, PS/1 PENTATHLON/PCI

... continued from previous page

DRAM JUMPER CONFIGURATION	
Size	JP14
4MB	pins 1 & 2, 3 & 4 closed
8MB	pins 1 & 2, 3 & 4 closed
8MB	pins 2 & 3 closed
16MB	pins 2 & 3 closed
16MB	pins 1 & 2, 3 & 4 closed
32MB	pins 1 & 2, 3 & 4 closed
36MB	pins 1 & 2, 3 & 4 closed
48MB	pins 1 & 2, 3 & 4 closed
64MB	pins 2 & 3 closed
64MB	pins 1 & 2, 3 & 4 closed
128MB	pins 1 & 2, 3 & 4 closed
128MB	pins 1 & 2, 3 & 4 closed

CPU SPEED CONFIGURATION	
Speed	JP16
75MHz	pins 1 & 2, 3 & 4 closed
90MHz	pins 3 & 4 closed
100MHz	Open