


ADVANCED LOGIC RESEARCH, INC.

FLEXCACHE 25386DT

Processor	80386DX
Processor Speed	25MHz
Chip Set	Unidentified
Max. Onboard D`RAM	16MB (11MB on external memory card)
Cache	64KB
BIOS	Phoenix
Dimensions	355mm x 304mm
I/O Options	32-bit external memory card
NPU Options	80387DX/3167

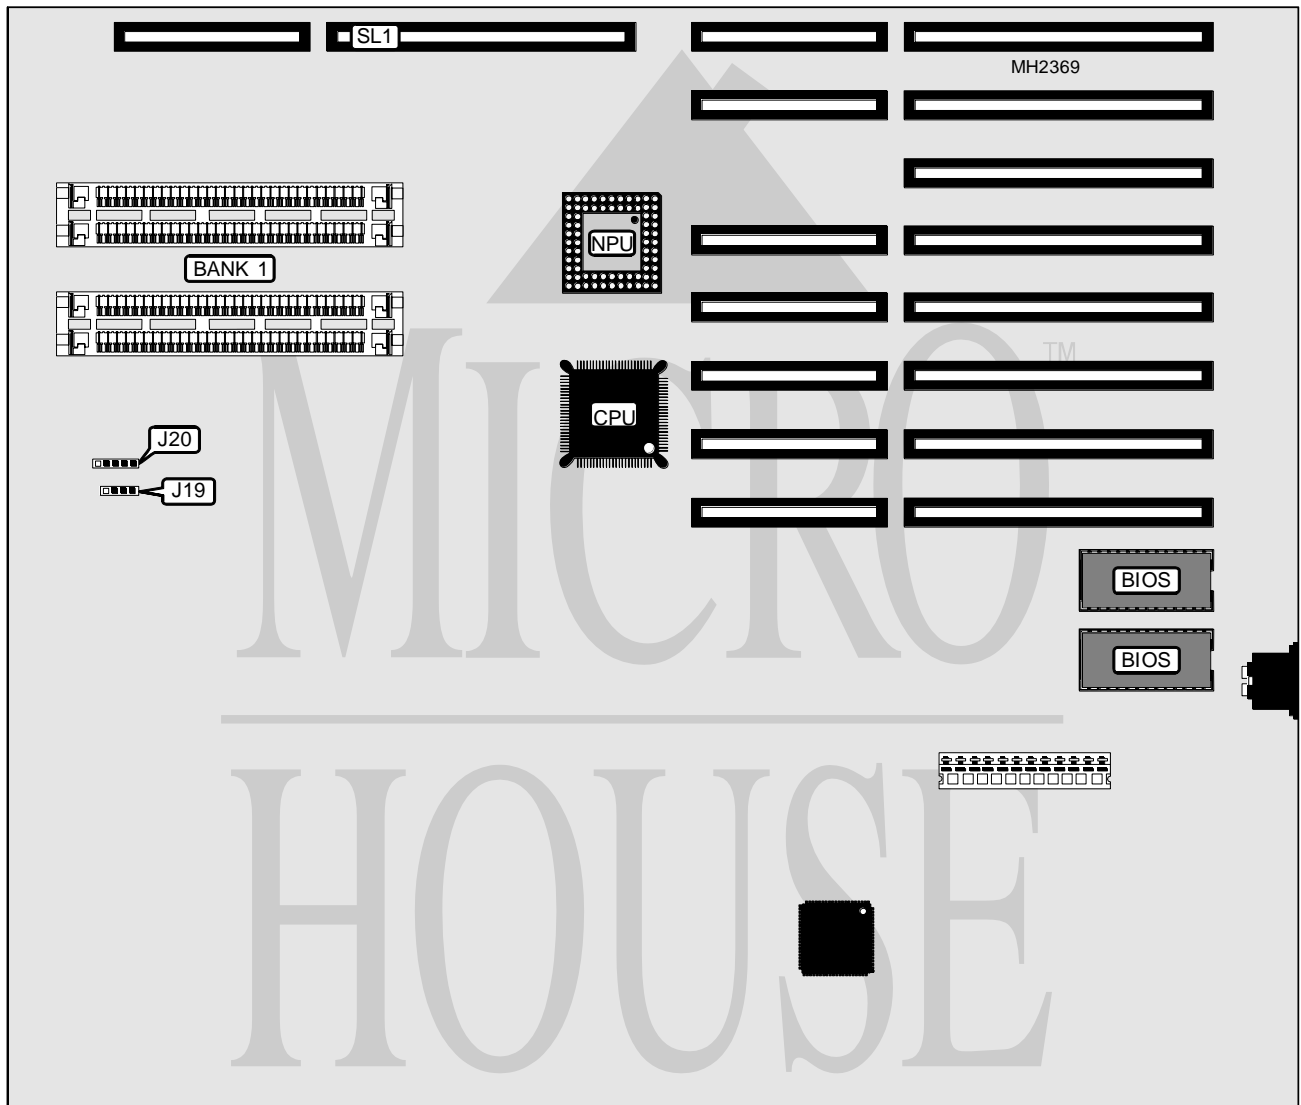

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J19	32-bit external memory card	SL1
Front panel connector	J20		

Continued on next page. . .

ADVANCED LOGIC RESEARCH, INC.
FLEXCACHE 25386DT

... continued from previous page

DRAM CONFIGURATION (MAINBOARD)		
Size	Bank 0	Bank 1
1MB	1MB	NONE
2MB	1MB	(4) 256K x 9
5MB	1MB	(4) 1M x 9

Note: Bank 0 is factory installed and is not configurable. The location is unknown.

DRAM CONFIGURATION (1MB FLEXCARD)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
6MB	(36) 41256	NONE	NONE	NONE
7MB	(36) 41256	(36) 41256	NONE	NONE
8MB	(36) 41256	(36) 41256	(36) 41256	NONE
9MB	(36) 41256	(36) 41256	(36) 41256	(36) 41256
10MB	(36) 41256	(36) 44256	NONE	NONE
11MB	(36) 41256	(36) 41256	(36) 44256	NONE
12MB	(36) 41256	(36) 41256	(36) 41256	(36) 44256
14MB	(36) 41256	(36) 44256	(36) 44256	NONE
15MB	(36) 41256	(36) 41256	(36) 44256	(36) 44256
16MB	(36) 41256	(36) 44256	(36) 44256	(36) 44256

Note: Bank 0 is factory configured. Mainboard must have 5 MB installed in order to use this card.

DRAM CONFIGURATION (4MB FLEXCARD)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
9MB	(36) 44256	NONE	NONE	NONE
10MB	(36) 44256	(36) 41256	NONE	NONE
11MB	(36) 44256	(36) 41256	(36) 41256	NONE
12MB	(36) 44256	(36) 41256	(36) 41256	(36) 41256
13MB	(36) 44256	(36) 44256	NONE	NONE
14MB	(36) 44256	(36) 41256	(36) 44256	NONE
15MB	(36) 44256	(36) 41256	(36) 41256	(36) 44256
16MB	(36) 44256	(36) 44256	(36) 44256	NONE

Note: Bank 0 is factory configured. Mainboard must have 5 MB installed in order to use this card.

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
64KB	(4) 8K x 8	(4) 8K x 8

Note: The location of the cache is unidentified.