


ACER, INC.

1120SX

Processor	80386SX
Processor Speed	20MHz
Chip Set	Unidentified
Max. Onboard DRAM	8MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	Parallel port, serial ports (2), PS/2 mouse interface, VGA port, riser slot
NPU Options	80387SX

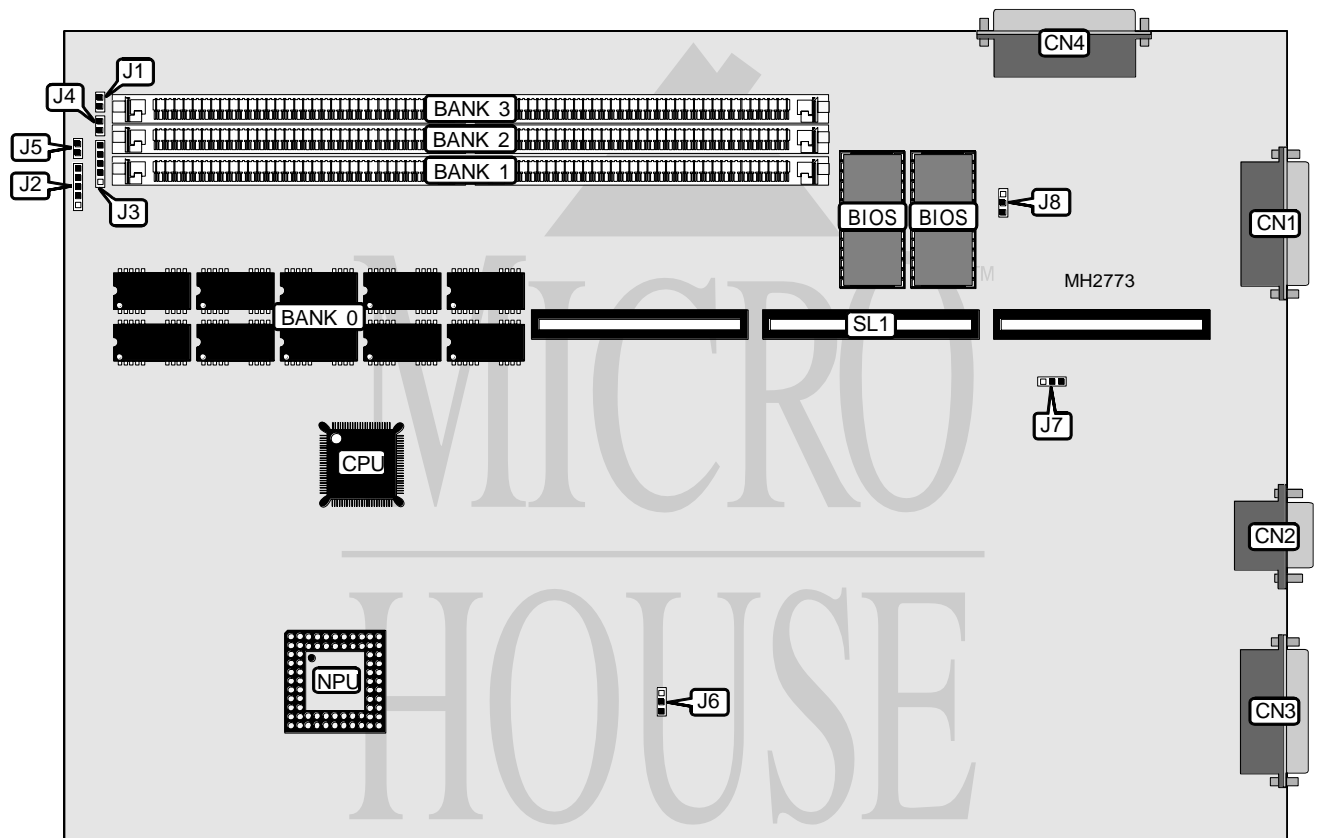

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 1	CN1	Keyboard interface	J2
Serial port 2	CN2	PS/2 mouse interface	J3
Parallel port	CN3	Turbo LED	J4
Video board port	CN4	Riser slot	SL1
Reset switch	J5		

Continued on next page. . .

ACER, INC.
1120SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Key lock enabled	J1	Open
Key lock disabled	J1	Closed
í On board VGA enabled	J5	Closed
On board VGA disabled	J5	Open
í Password enabled	J6	pins 1 & 2 closed
Password disabled	J6	pins 2 & 3 closed
í All disabled	J7	Open
0 wait state enabled	J7	pins 1 & 2 closed
IRQ9 enabled	J7	pins 2 & 3 closed
í All disabled	J8	Open
IOCS16 enabled	J8	pins 1 & 2 closed
Refresh enabled	J8	pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
2MB	2MB	NONE	NONE	NONE
4MB	2MB	(2) 1M x 9	NONE	NONE
8MB	2MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
Note: Bank 0 is factory installed and is not configurable.				