


ACER, INC. 1116SX

Processor	80386SX
Processor Speed	20MHz
Chip Set	Unidentified
Max. Onboard DRAM	5MB
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	Parallel port, serial ports (2), PS/2 mouse interface, VGA port, riser slot
NPU Options	80387SX

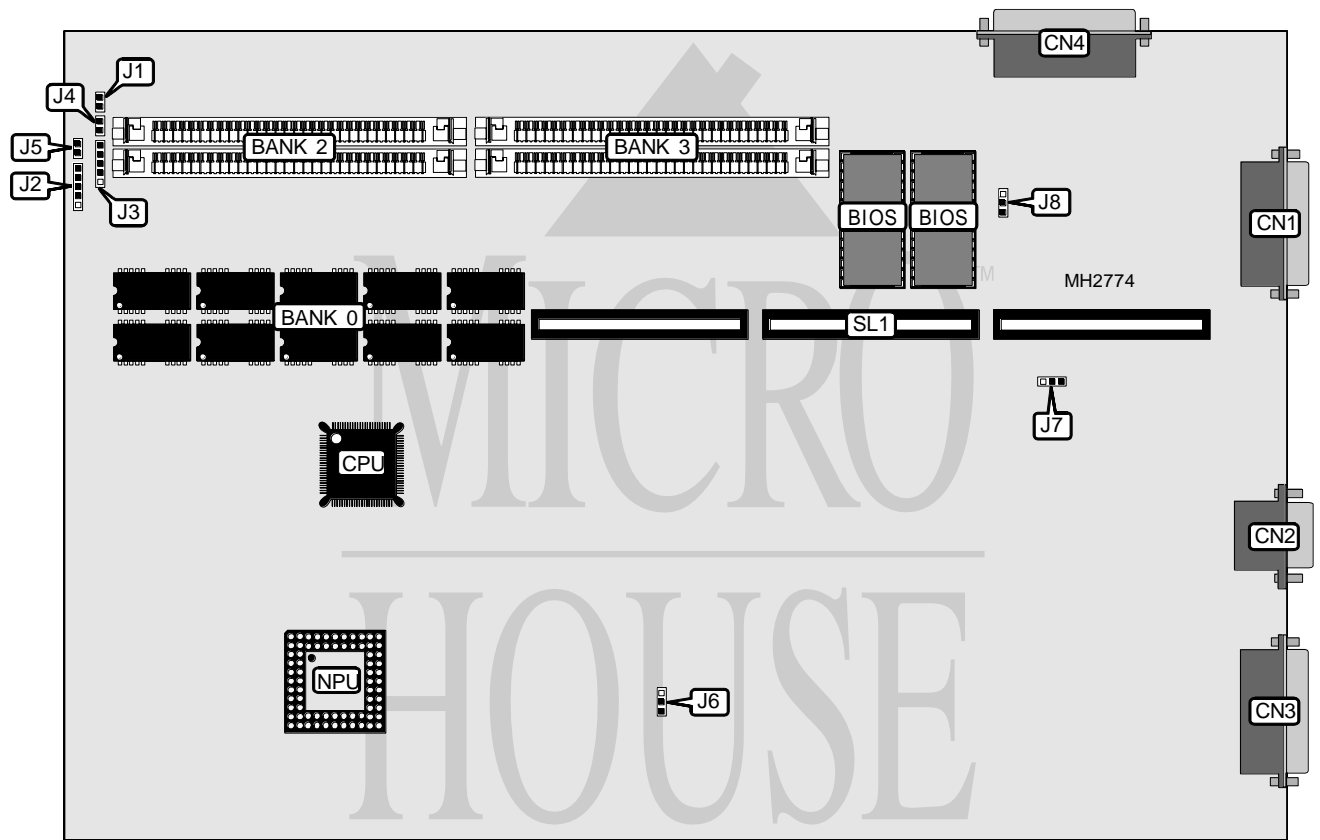

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port 1	CN1	Keyboard interface	J2
Serial port 2	CN2	PS/2 mouse interface	J3
Parallel port	CN3	Turbo LED	J4
Video board port	CN4	Riser slot	SL1
Reset switch	J5		

Continued on next page...

ACER, INC.

1116SX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Key lock enabled	J1	Open
Key lock disabled	J1	Closed
í On board VGA enabled	J5	Closed
On board VGA disabled	J5	Open
í Password enabled	J6	pins 1 & 2 closed
Password disabled	J6	pins 2 & 3 closed
í All disabled	J7	Open
0 wait state enabled	J7	pins 1 & 2 closed
IRQ9 enabled	J7	pins 2 & 3 closed
í All disabled	J8	Open
IOCS16 enabled	J8	pins 1 & 2 closed
Refresh enabled	J8	pins 2 & 3 closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
1MB	1MB	NONE	NONE
3MB	1MB	(2) 1M x 9	NONE
5MB	1MB	(2) 1M x 9	(2) 1M x 9
Note: Bank 0 is factory installed and is not configurable.			