


SEANIX TECHNOLOGY, INC.

486VLP

Processor	80486SX/80487SX/80486DX/80486DX2/Pentium Overdrive
Processor Speed	25/33/50(internal)/50/66(internal)MHz
Chip Set	Unidentified
Max. Onboard DRAM	32MB
Cache	64/128/256KB
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	32-bit VESA local bus slots (2)
NPU Options	None

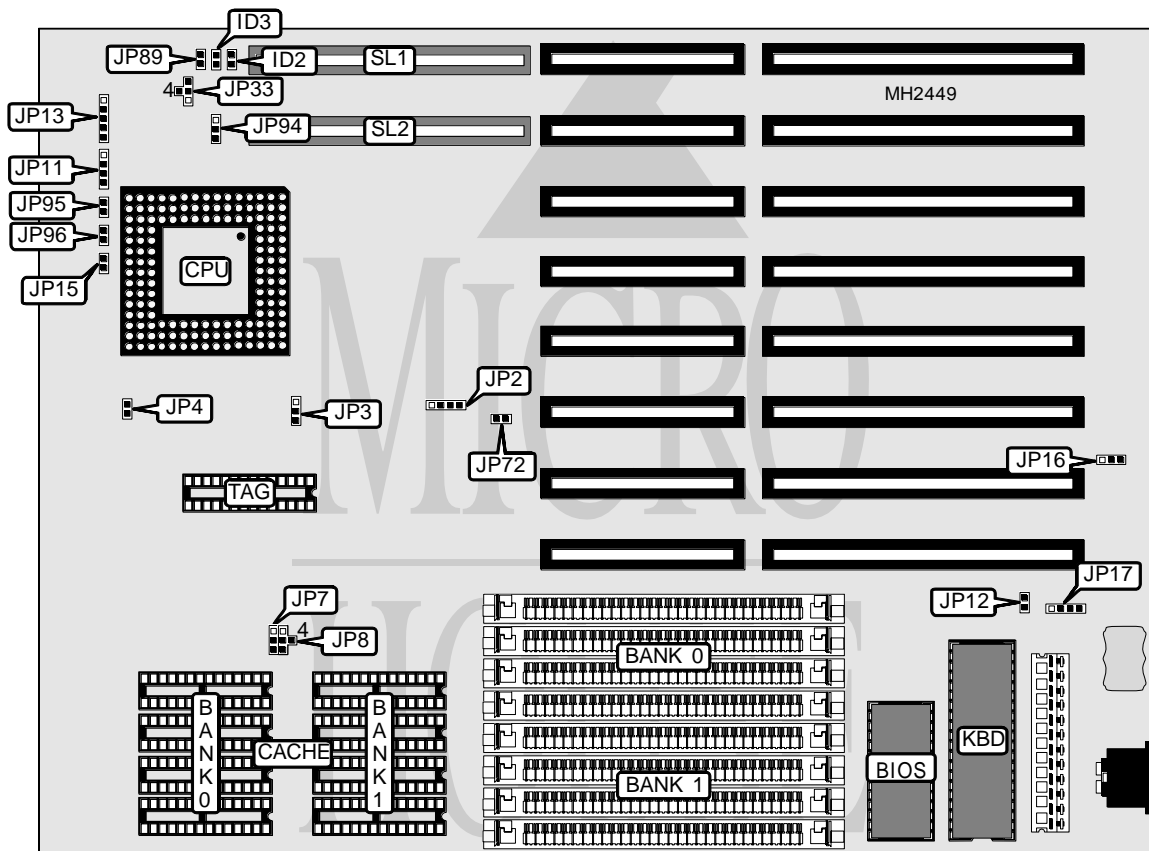

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	JP11	Turbo switch	JP95
Power LED & keylock	JP13	Turbo LED	JP96
Reset switch	JP15	32-bit VESA local bus slots	SL1 & SL2
External battery	JP17		

Continued on next page...

SEANIX TECHNOLOGY, INC.
486VLP

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Password disabled	JP12	Open
Password enabled	JP12	Closed
í CMOS memory normal operation	JP16	pins 1 & 2 closed
CMOS memory clear	JP16	pins 2 & 3 closed
í Factory configured - do not alter	JP33	pins 1 & 2 closed
í VESA card select normal VESA card	JP89	Closed
VESA card select Weitek P9000 (pins 2 & 3 closed on JP33)	JP89	Open
í Factory configured - do not alter	JP94	pins 1 & 2 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	NONE
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	NONE	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER CONFIGURATION		
Size	JP7	JP8
64KB	pins 2 & 3 closed	pins 2 & 4 closed
128KB	pins 1 & 2 closed	pins 2 & 3 closed
256KB	pins 1 & 2 closed	pins 1 & 2 closed

CPU TYPE CONFIGURATION			
Type	JP2	JP3	JP4
80486SX	pins 2 & 3 closed	Open	Open
80487SX	pins 1 & 2, 3 & 4 closed	pins 1 & 2 closed	Closed
80486DX	pins 1 & 2, 3 & 4 closed	pins 2 & 3 closed	Open
80486DX2	pins 1 & 2, 3 & 4 closed	pins 2 & 3 closed	Open
Pentium Overdrive	pins 1 & 2, 3 & 4 closed	pins 1 & 2 closed	Closed

Continued on next page. . .

SEANIX TECHNOLOGY, INC.
486VLP

... continued from previous page

CPU SPEED CONFIGURATION	
Speed	JP72
25MHz	Closed
33MHz	Open
50iMHz	Closed
50MHz	Open
66iMHz	Open

BUS SPEED CONFIGURATION		
CPU speed	ID2	ID3
<= 33MHz	Closed	Open
> 33MHz	Closed	Closed