


# ICL VALUEPLUS DL-SERIES REV. C

<b>Processor</b>	80486SX/80486DX/80486DX2
<b>Processor Speed</b>	25/33/50(internal)/66(internal)MHz
<b>Chip Set</b>	VIA
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	64/128/256KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	PS/2 mouse port, parallel port, serial ports (2), VGA port, VGA feature connector, floppy drive interface, IDE interface, riser card
<b>NPU Options</b>	None

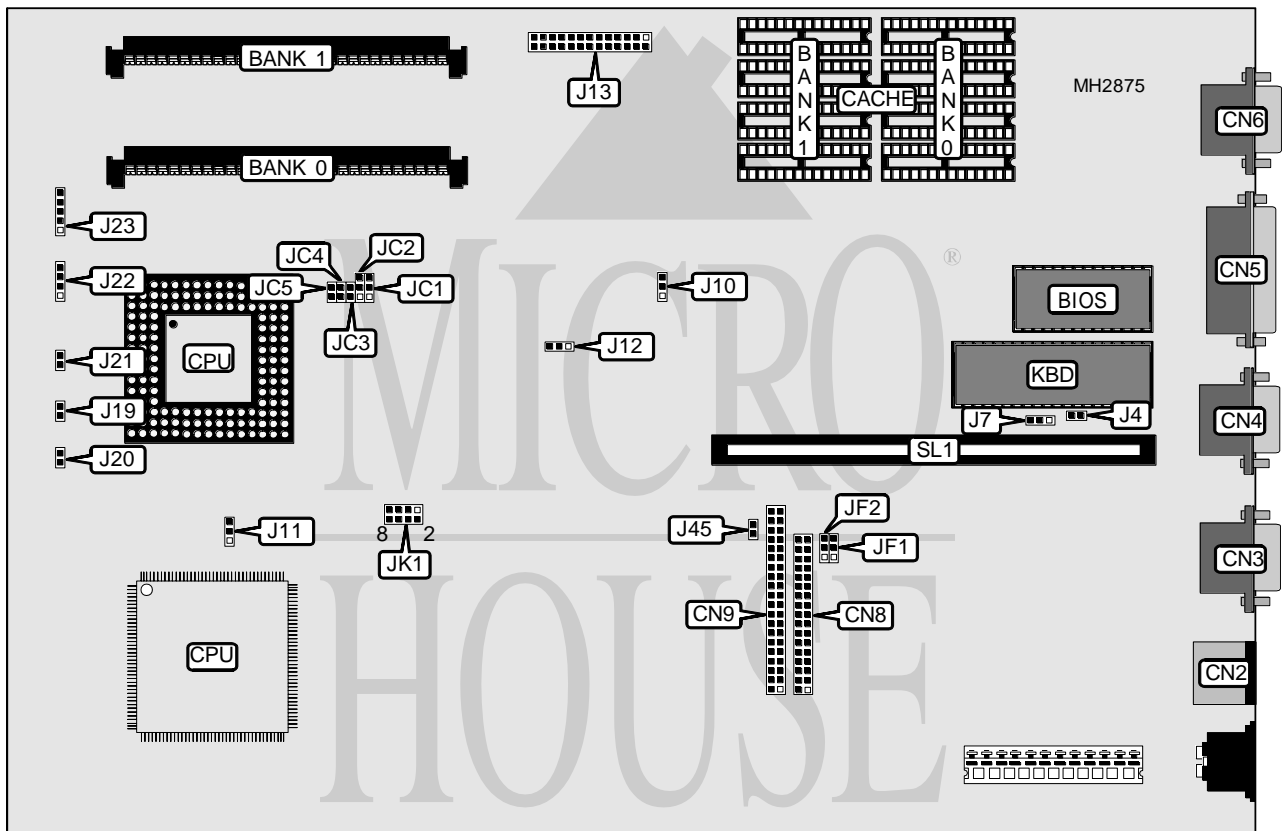

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN2	Turbo switch	J19
Serial port 1	CN3	Turbo LED	J20
Serial port 2	CN4	Reset switch	J21
Parallel port	CN5	Speaker	J22
VGA port	CN6	Power LED & keylock	J23
Floppy drive interface	CN8	IDE interface LED	J45
IDE interface	CN9	Riser Card	SL1
VGA feature connector	J13		

Continued on next page. . .

# ICL

## VALUEPLUS DL-SERIES REV. C

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select monochrome/EGA/VGA	J4	Open
Monitor type select color	J4	Closed
í Password normal operation	J7	Open
Password reset	J7	pins 2 & 3 closed
í On board VGA enabled	J10	pins 1 & 2 closed
On board VGA disabled	J10	pins 2 & 3 closed
í Factory configured - do not alter	J11	N/A
í Factory configured - do not alter	J12	N/A
í Factory configured - do not alter	JC5	N/A

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(1) 256K x 36	NONE
2MB	(1) 256K x 36	(1) 256K x 36
4MB	(1) 1M x 36	NONE
5MB	(1) 1M x 36	(1) 256K x 36
8MB	(1) 1M x 36	(1) 1M x 36
16MB	(1) 4M x 36	NONE
17MB	(1) 4M x 36	(1) 256K x 36
20MB	(1) 4M x 36	(1) 1M x 36
32MB	(1) 4M x 36	(1) 4M x 36

CACHE CONFIGURATION		
Size	Bank 0	Bank 1
64KB	(4) 8K x 8	(4) 8K x 8
128KB	(4) 32K x 8	NONE
256KB	(4) 32K x 8	(4) 32K x 8

CPU TYPE CONFIGURATION				
Type	JC1	JC2	JC3	JC4
80486SX	pins 2 & 3 closed	pins 2 & 3 closed	Open	Open
80486DX	pins 1 & 2 closed	pins 1 & 2 closed	Closed	Closed
80486DX2	pins 1 & 2 closed	pins 1 & 2 closed	Closed	Closed

CPU SPEED CONFIGURATION	
Speed	JK1
25MHz	pins 5 & 6 closed
33MHz	pins 1 & 2 closed
50iMHz	pins 5 & 6 closed
66iMHz	pins 1 & 2 closed

Continued on next page. ...

---

**ICL**  
**VALUEPLUS DL-SERIES REV. C***... continued from previous page*

FLOPPY DRIVE CONFIGURATION		
Type	JF1	JF2
1.44MB	pins 2 & 3 closed	pins 2 & 3 closed
2.88MB	pins 1 & 2 closed	pins 1 & 2 closed