


ICL ERGOPRO C3/33

Processor	80386SX
Processor Speed	33MHz
Chip Set	TI
Max. Onboard DRAM	16MB
Cache	None
BIOS	ICL
Dimensions	430mm x 352mm
I/O Options	PS/2 mouse port, parallel port, serial port, VGA port, floppy drive interface, IDE interface, riser slot
NPU Options	80378SX

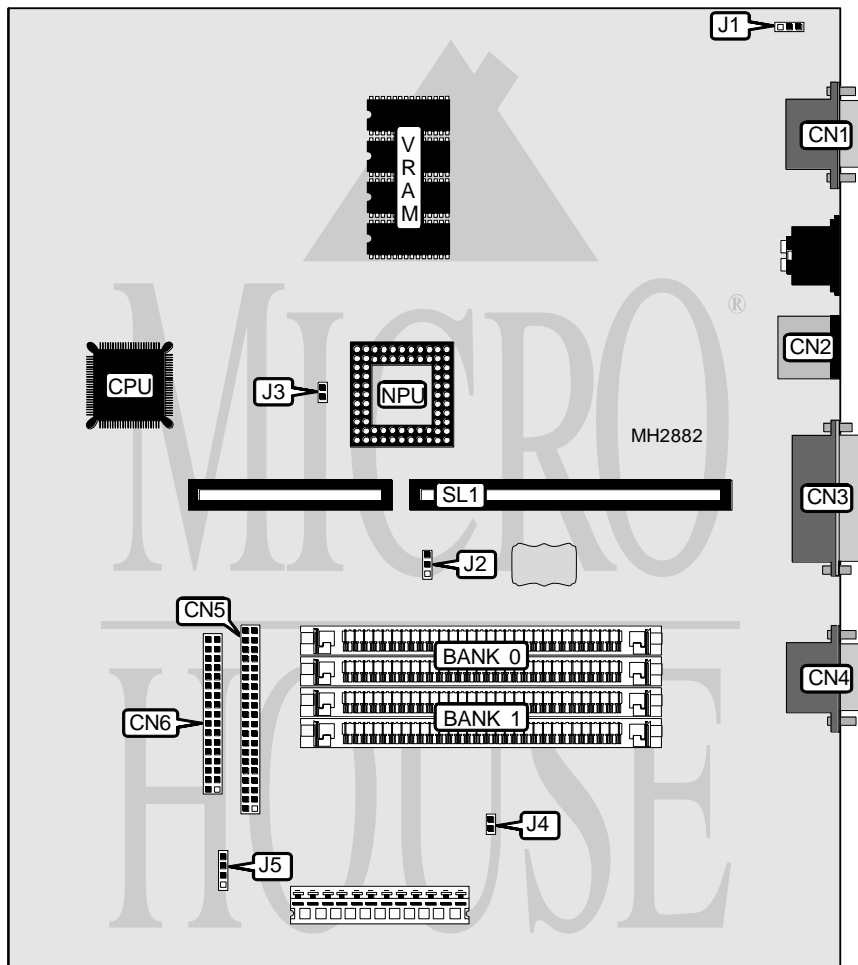

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	Floppy drive interface	CN6
PS/2 mouse port	CN2	Reset switch	J3
Parallel port	CN3	Chassis fan power	J4
Serial port	CN4	IDE interface LED	J5
IDE interface	CN5	Riser Card	SL1

Continued on next page. . .

ICL

ERGOPRO C3/33

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í On board VGA enabled	J1	pins 2 & 3 closed
On board VGA disabled	J1	pins 1 & 2 closed
í CMOS memory normal operation	J2	pins 1 & 2 closed
CMOS memory clear	J2	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9

VRAM CONFIGURATION	
Size	Bank 0
512KB	(4) 256K x 4
Note: VRAM is factory installed and is not configurable.	