


UNIDENTIFIED 10MHz - XT

Processor 8088
Processor Speed 10MHz
Chip Set Unidentified
Max. Onboard DRAM 640KB
Cache None
BIOS Unidentified
Dimensions 330mm x 218mm
I/O Options None
NPU Options 8087

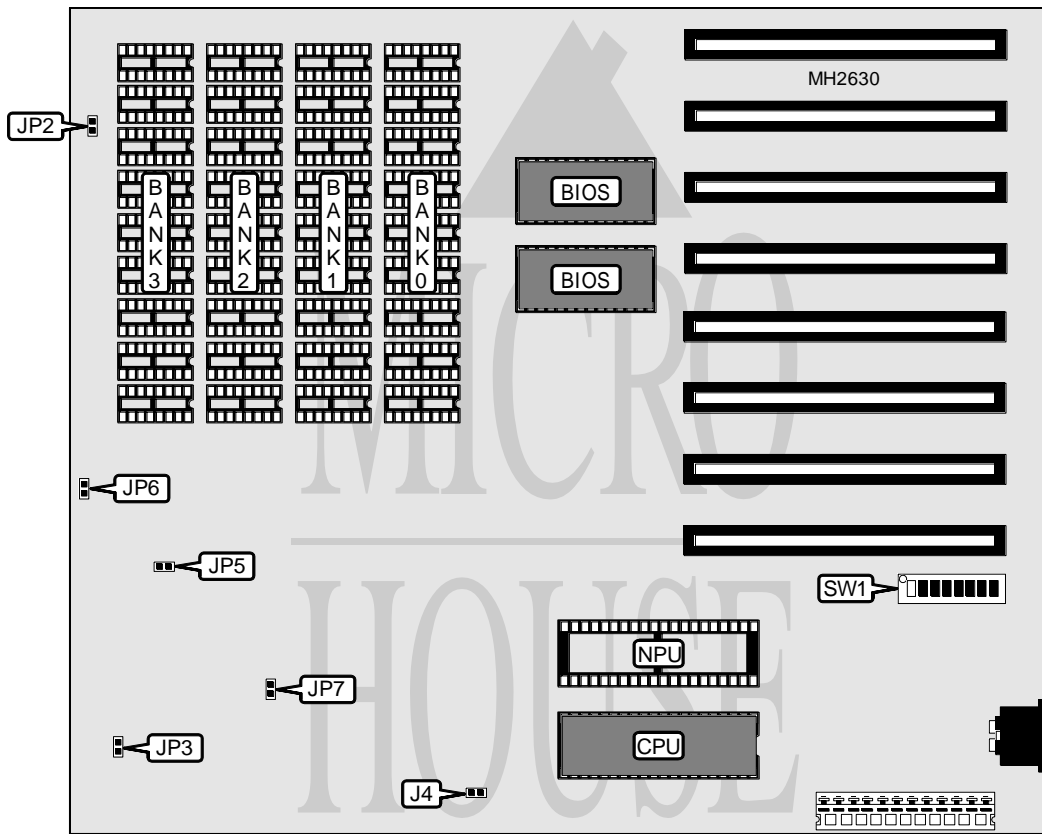

CONNECTIONS			
Purpose	Location	Purpose	Location
Keylock	J4	Turbo switch	JP5
Speaker	JP2	Power LED keylock	JP6
Turbo LED	JP3	Reset switch	JP7

Continued on next page. . .

UNIDENTIFIED

10MHz - XT

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Switch	Position
í Factory configured - do not alter	SW1/1	Off
í NPU disabled	SW1/2	On
NPU enabled	SW1/2	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256KB	(9) 41256	NONE	NONE	NONE
512KB	(9) 41256	(9) 41256	NONE	NONE
640KB	(9) 41256	(9) 41256	(9) 4164	(9) 4164

DRAM SWITCH CONFIGURATION		
Size	SW1/3	SW1/4
256KB	Off	Off
512KB	On	Off
640KB	Off	On

VIDEO CONFIGURATION		
Type	SW1/5	SW1/6
None	On	On
Monochrome	Off	Off
Color (40 x 25)	Off	On
Color (80 x 25)	On	Off

FLOPPY DRIVE CONFIGURATION		
Drives installed	SW1/7	SW1/8
2	On	On
3	On	Off
4	Off	Off