


# UNIDENTIFIED CY-903

<b>Processor</b>	80386SX
<b>Processor Speed</b>	16/20/25MHz
<b>Chip Set</b>	VLSI
<b>Max. Onboard DRAM</b>	32MB
<b>Cache</b>	None
<b>BIOS</b>	Award
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

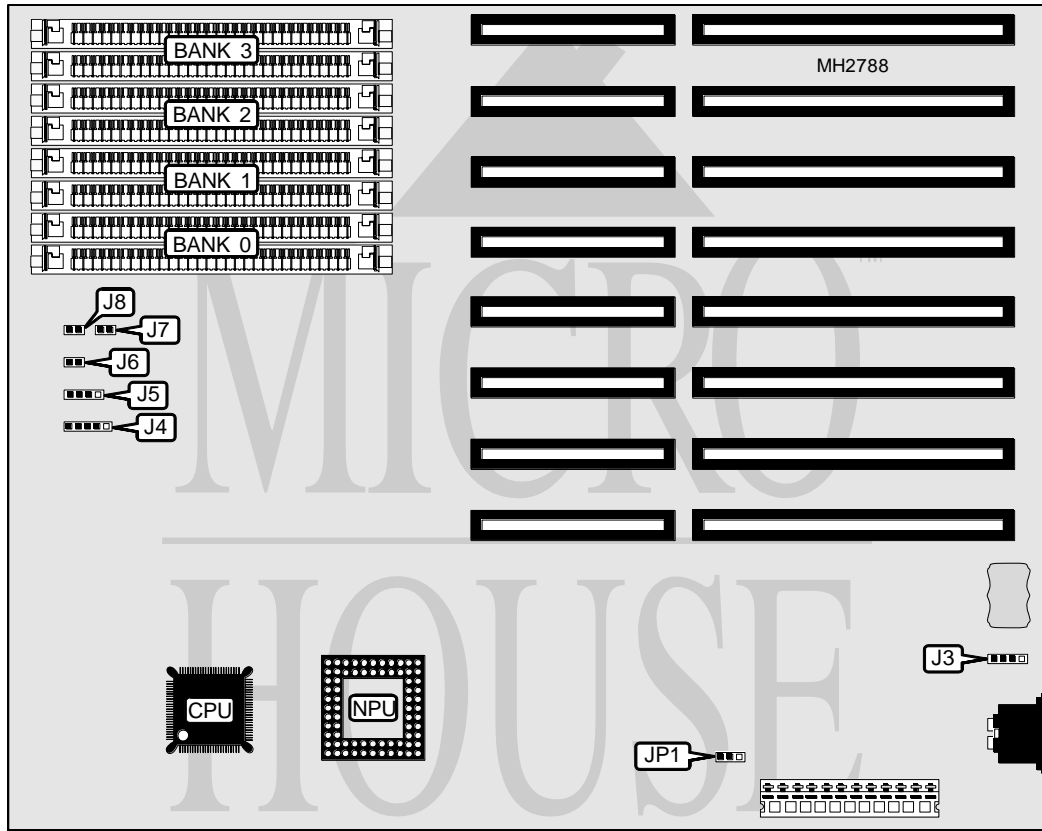

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J3	Turbo LED	J6
Power LED & keylock	J4	Reset switch	J7
Speaker	J5	Turbo switch	J8

Continued on next page. . .

# UNIDENTIFIED CY-903

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Monitor type select color	JP1	Closed
Monitor type select monochrome	JP1	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(2) 256K x 9	NONE	NONE	NONE
1MB	(2) 256K x 9	(2) 256K x 9	NONE	NONE
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	NONE
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	NONE	NONE	NONE
2.5MB	(2) 256K x 9	(2) 1M x 9	NONE	NONE
3MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	NONE
4MB	(2) 1M x 9	(2) 1M x 9	NONE	NONE
4.5MB	(2) 1M x 9	(2) 1M x 9	(2) 256K x 9	NONE
5MB	(2) 256K x 9	(2) 256K x 9	(2) 1M x 9	(2) 1M x 9
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	NONE
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	NONE	NONE	NONE
8.5MB	(2) 256K x 9	(2) 4M x 9	NONE	NONE
9MB	(2) 256K x 9	(2) 256K x 9	(2) 4M x 9	NONE
10MB	(2) 1M x 9	(2) 4M x 9	NONE	NONE
12MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	NONE
16MB	(2) 4M x 9	(2) 4M x 9	NONE	NONE
16.5MB	(2) 4M x 9	(2) 4M x 9	(2) 256K x 9	NONE
17MB	(2) 256K x 9	(2) 256K x 9	(2) 4M x 9	(2) 4M x 9
18MB	(2) 4M x 9	(2) 4M x 9	(2) 1M x 9	NONE
20MB	(2) 1M x 9	(2) 1M x 9	(2) 4M x 9	(2) 4M x 9
24MB	(2) 4M x 9	(2) 4M x 9	(2) 4M x 9	NONE
32MB	(2) 4M x 9	(2) 4M x 9	(2) 4M x 9	(2) 4M x 9