


# COMPAQ COMPUTER CORPORATION PRESARIO SERIES

<b>Processor</b>	Pentium
<b>Processor Speed</b>	60MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	136MB
<b>Cache</b>	256KB
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Parallel port, PS/2 mouse port, serial ports (2), VGA feature connector, VGA port, modem port, CD-ROM audio connector, modem audio connector, video memory interface
<b>NPU Options</b>	None

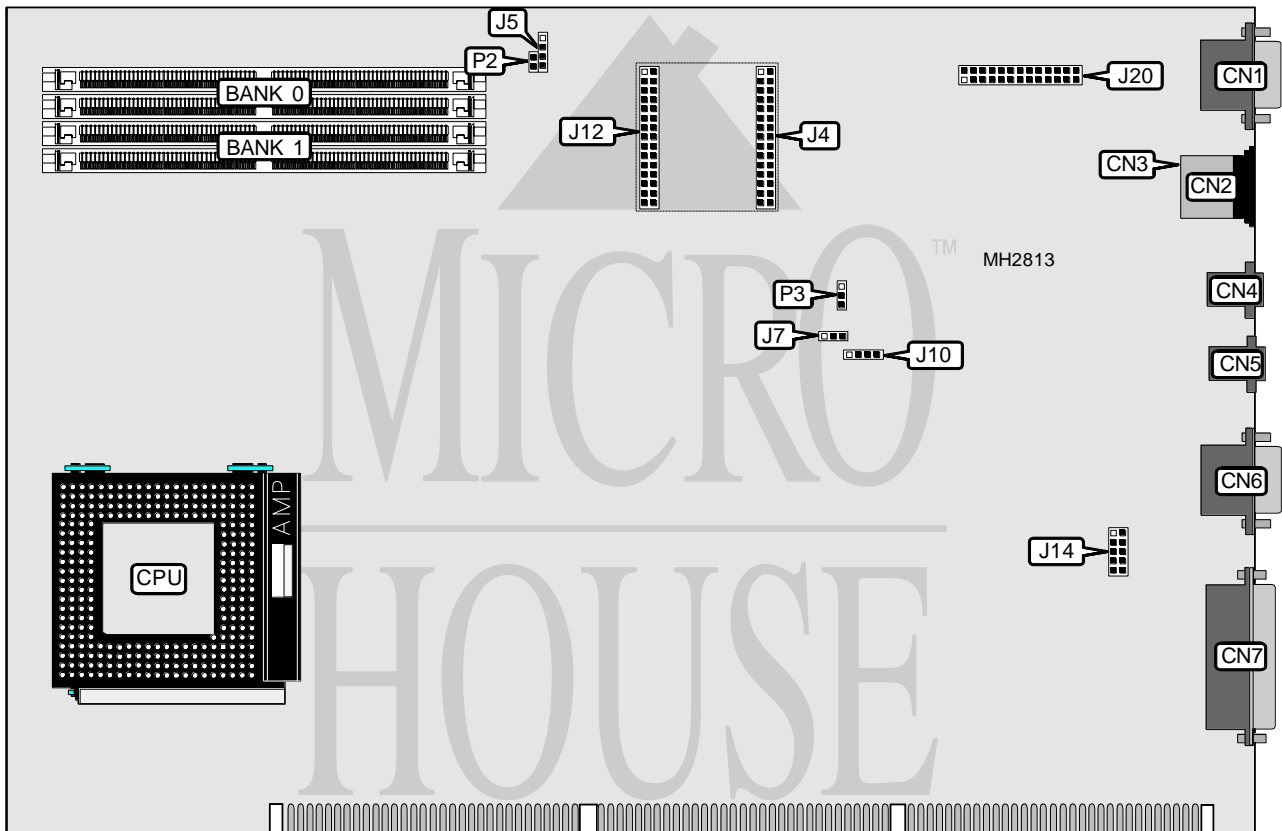

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	Video memory connector	J4, J12
PS/2 mouse port	CN2	External battery	J5
Keyboard port	CN3	Modem audio connector	J7
Modem port	CN4	CD-ROM audio connector	J10
Modem port	CN5	Serial port 2	J14
Serial port 1	CN6	VGA feature connector	J20
Parallel port	CN7		

Continued on next page. . .

# COMPAQ COMPUTER CORPORATION PRESARIO SERIES

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í CMOS memory normal operation	P2	Closed
CMOS memory clear	P2	Open
í Password enabled	P3	pins 1 & 2 closed
Password disabled	P3	pins 2 & 3 closed

DRAM CONFIGURATION			
Size	Bank 0A	Bank 0	Bank 1
16MB	8MB	(2) 1M x 36	NONE
24MB	8MB	(2) 1M x 36	(2) 1M x 36
24MB	8MB	(2) 2M x 36	NONE
32MB	8MB	(2) 1M x 36	(2) 2M x 36
32MB	8MB	(2) 2M x 36	(2) 1M x 36
40MB	8MB	(2) 2M x 36	(2) 2M x 36
40MB	8MB	(2) 4M x 36	NONE
48MB	8MB	(2) 1M x 36	(2) 4M x 36
48MB	8MB	(2) 4M x 36	(2) 1M x 36
56MB	8MB	(2) 2M x 36	(2) 4M x 36
56MB	8MB	(2) 4M x 36	(2) 2M x 36
72MB	8MB	(2) 4M x 36	(2) 4M x 36
72MB	8MB	(2) 8M x 36	NONE
80MB	8MB	(2) 1M x 36	(2) 8M x 36
80MB	8MB	(2) 8M x 36	(2) 1M x 36
88MB	8MB	(2) 2M x 36	(2) 8M x 36
88MB	8MB	(2) 8M x 36	(2) 2M x 36
104MB	8MB	(2) 4M x 36	(2) 8M x 36
104MB	8MB	(2) 8M x 36	(2) 4M x 36
136MB	8MB	(2) 8M x 36	(2) 8M x 36

Note: Bank 0A is factory installed and is not configurable.

CACHE CONFIGURATION
Note: This board is factory installed with 256KB. It is not configurable.

VIDEO MEMORY CONFIGURATION
Note: To upgrade video memory, install video module on jumpers J4 & J12.