


CHAINTECH COMPUTER COMPANY, LTD.

5 S L B . 1

Processor	Pentium
Processor Speed	75/90/100MHz
Chip Set	SIS
Max. Onboard DRAM	128MB
Cache	256/512/1024KB
BIOS	Award
Dimensions	330mm x 220mm
I/O Options	32-bit PCI slots (3), green PC connector
NPU Options	None

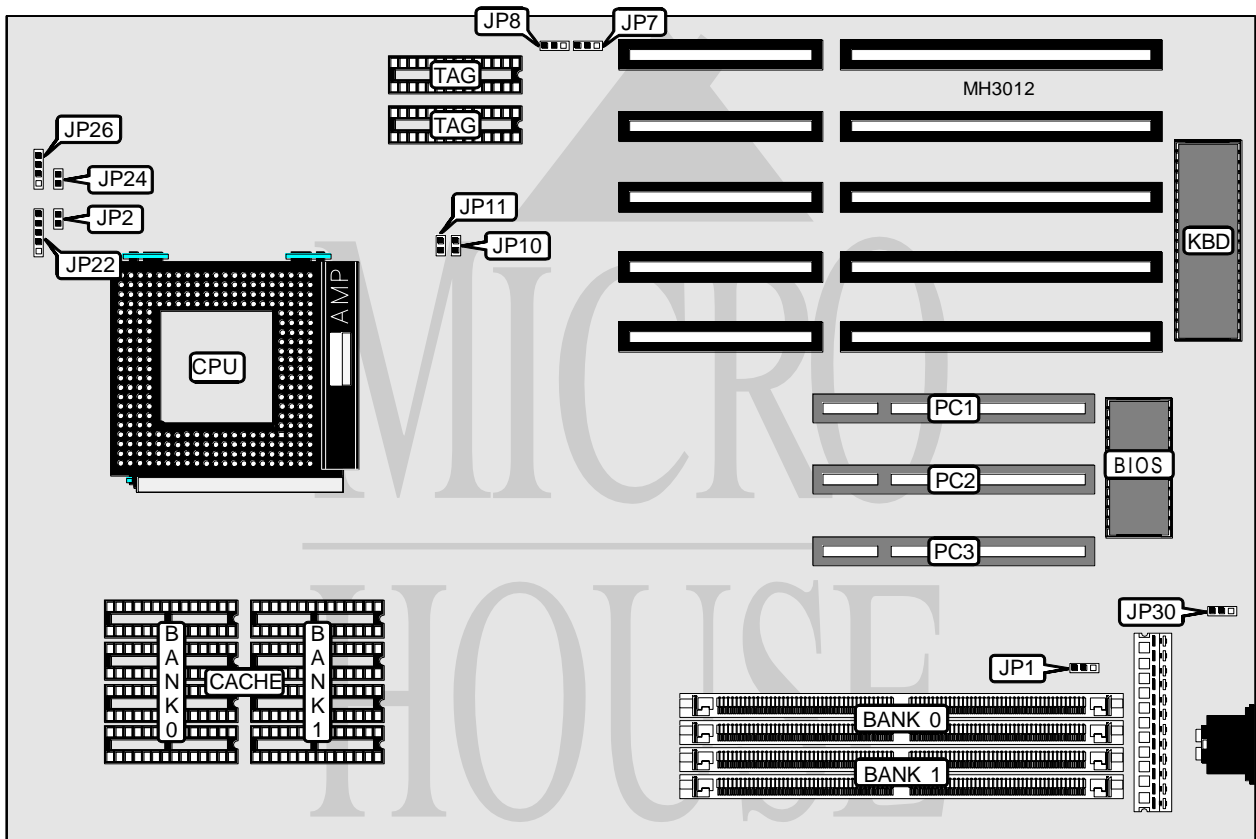

CONNECTIONS			
Purpose	Location	Purpose	Location
Green PC connector	JP2	Speaker	JP26
Power LED & keylock	JP22	32-bit PCI slots	PC1 - PC3
Reset switch	JP24		

Continued on next page. . .

CHAINTECH COMPUTER COMPANY, LTD.

5 S L B . 1

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
Flash BIOS write protect enabled	JP30	pins 1 & 2 closed
Flash BIOS write protect disabled	JP30	pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	(2) 256K x 36	NONE
4MB	(2) 256K x 36	(2) 256K x 36
4MB	(2) 512K x 36	NONE
8MB	(2) 512K x 36	(2) 512K x 36
8MB	(2) 1M x 36	NONE
12MB	(2) 512K x 36	(2) 1M x 36
16MB	(2) 1M x 36	(2) 1M x 36
16MB	(2) 2M x 36	NONE
20MB	(2) 512K x 36	(2) 2M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36
32MB	(2) 4M x 36	NONE
36MB	(2) 512K x 36	(2) 4M x 36
40MB	(2) 1M x 36	(2) 4M x 36
48MB	(2) 2M x 36	(2) 4M x 36
64MB	(2) 4M x 36	(2) 4M x 36
64MB	(2) 8M x 36	NONE
80MB	(2) 2M x 36	(2) 8M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

DRAM JUMPER CONFIGURATION	
Type	JP1
Single side SIMM in Bank 0	pins 1 & 2 closed
Double side SIMM in Bank 0	pins 2 & 3 closed

CACHE CONFIGURATION			
Size	Bank 0	Bank 1	TAG
256KB	(4) 32K x 8	(4) 32K x 8	(2) 8K x 8
512KB	(4) 64K x 8	(4) 64K x 8	(2) 32K x 8
1MB	(4) 128K x 8	(4) 128K x 8	(2) 32K x 8

CACHE JUMPER CONFIGURATION		
Size	JP7	JP8
256KB	pins 1 & 2 closed	pins 1 & 2 closed
512KB	pins 2 & 3 closed	pins 1 & 2 closed
1MB	pins 2 & 3 closed	pins 2 & 3 closed

Continued on next page. . .

CHAINTECH COMPUTER COMPANY, LTD.
5 S L B . 1

... continued from previous page

CPU SPEED CONFIGURATION		
Speed	JP10	JP11
75MHz	Open	Open
90MHz	Open	Closed
100MHz	Closed	Closed