


AQUARIUS SYSTEMS, INC.

ASI - B A T

Processor 80286
Processor Speed 10MHz
Chip Set Unidentified
Max. Onboard DRAM 1MB
Cache None
BIOS AMI
Dimensions 330mm x 218mm
I/O Options None
NPU Options None

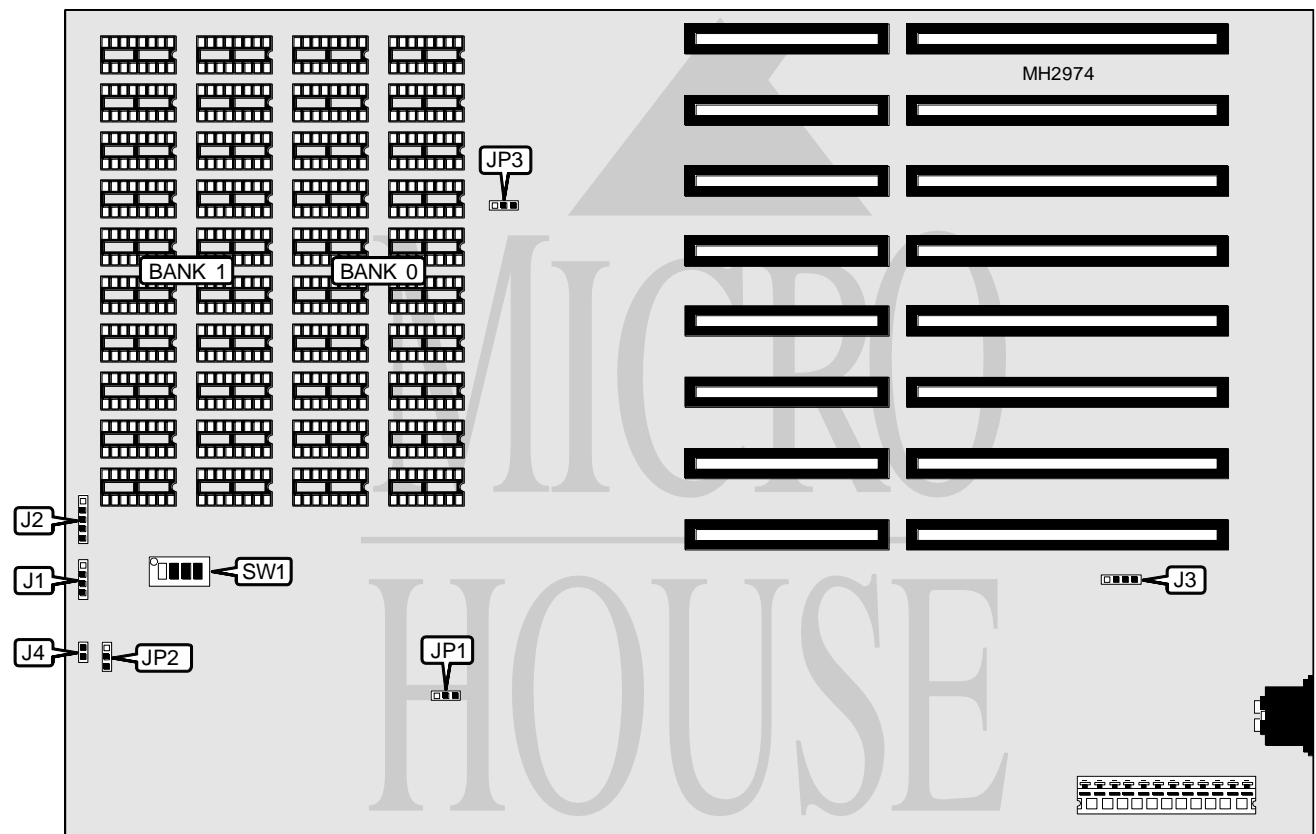

CONNECTIONS			
Purpose	Location	Purpose	Location
Speaker	J1	Reset switch	J4
Power LED & keylock	J2	Turbo LED	JP1
External battery	J3		

Continued on next page. . .

AQUARIUS SYSTEMS, INC.

A S I - B A T

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Factory configured - do not alter	JP2	N/A
í BIOS type select 27128	JP3	pins 1 & 2 closed
BIOS type select 27256	JP3	pins 2 & 3 closed
í Monitor type select color	SW1/3	On
Monitor type select monochrome	SW1/3	Off

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(18) 41256	NONE
640KB	(18) 41256	(18) 4164
1MB	(18) 41256	(18) 41256

DRAM SWITCH CONFIGURATION			
Size	SW1/1	SW1/2	SW1/4
512KB	Off	On	Off
í 640KB	On	Off	Off
1MB	On	Off	On