


# HYUNDAI ELECTRONICS, INC.

## SUPER-16TM

<b>Processor</b>	8088
<b>Processor Speed</b>	4.77/10MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	640KB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, parallel port, serial port
<b>NPU Options</b>	8087

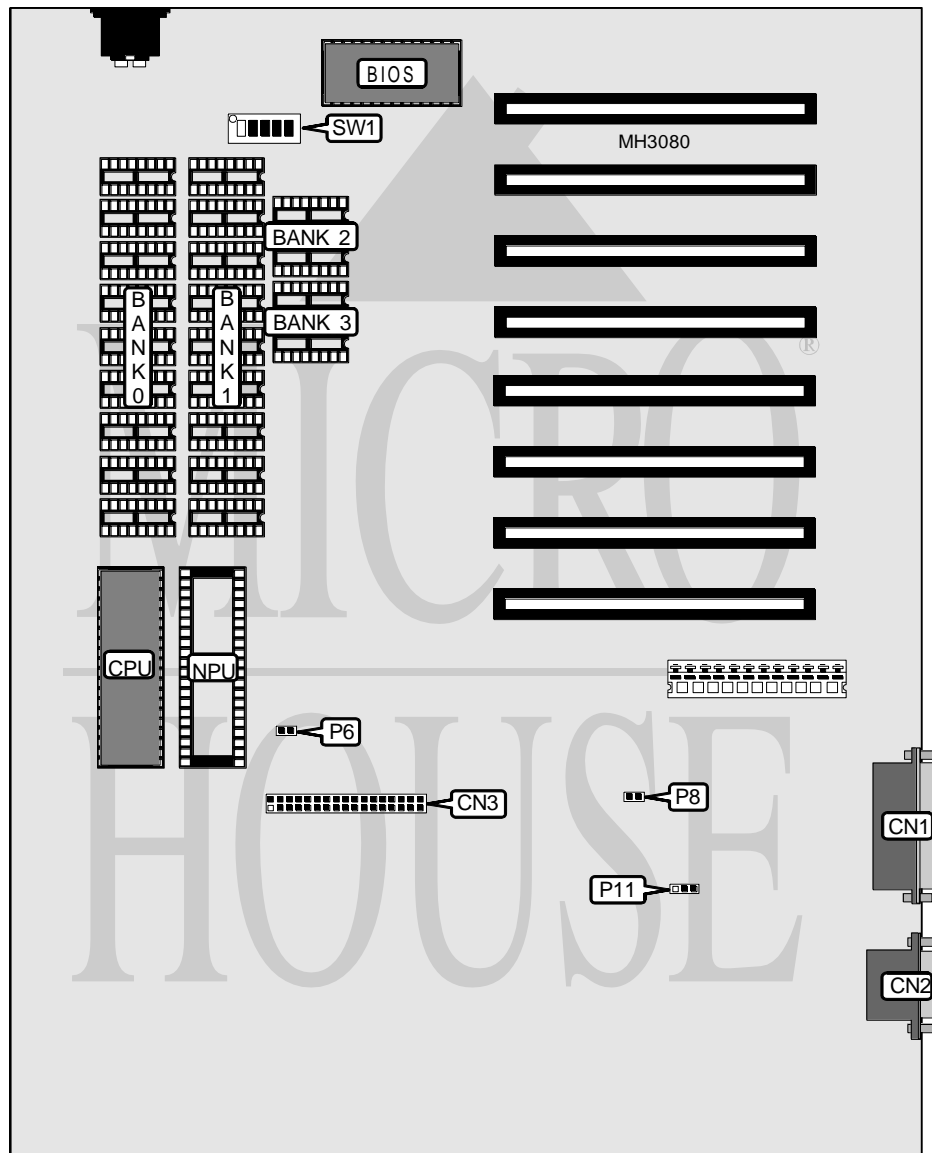

Continued on next page. . .

# HYUNDAI ELECTRONICS, INC.

## SUPER-16TM

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	CN1	LED connector	P6
Serial port	CN2	Speaker	P8
Floppy drive interface	CN3		

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
RTC address select 3E0	P11	pins 1 & 2 closed
RTC address select 2E0	P11	pins 2 & 3 closed
NPU disabled	SW1/2	On
NPU enabled	SW1/2	Off
Monitor type select color	SW1/4	On
Monitor type select monochrome	SW1/4	Off
BIOS type select 32KB	SW1/5	On
BIOS type select 16KB	SW1/5	Off

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256KB	(8) 41256	NONE	NONE	NONE
512KB	(8) 41256	(8) 41256	NONE	NONE
576KB	(8) 41256	(8) 41256	(2) 4164	NONE
640KB	(8) 41256	(8) 41256	(2) 4164	(2) 4164

DRAM SWITCH CONFIGURATION	
Size	SW1/3
512KB	Off
640KB	On

CPU SPEED CONFIGURATION	
Speed	SW1/1
4.77MHz	Off
10MHz	On