


UNIDENTIFIED 12MHz TURBO XT MAINBOARD

Processor	8088
Processor Speed	12MHz
Chip Set	Unidentified
Max. Onboard DRAM	640KB
Cache	None
BIOS	Unidentified
Dimensions	220mm x 220mm
I/O Options	None
NPU Options	8087

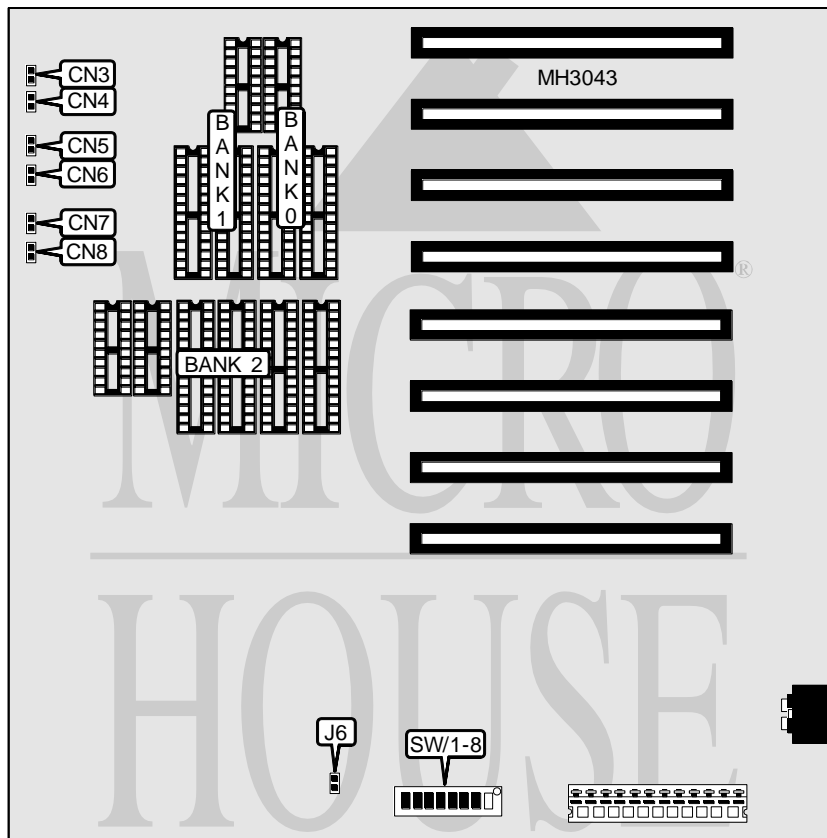

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED	CN3	Power LED & keylock	CN6
Reset switch	CN4	Turbo LED	CN7
Speaker	CN5	Turbo switch	CN8

Continued on next page. . .

UNIDENTIFIED 12MHZ TURBO XT MAINBOARD

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper/Switch	Position
í Memory wait state select 0 wait states	J6	Open
Memory wait state select 1 wait state	J6	Closed
í Parity check disabled	SW/1	On
Parity check enabled	SW/1	Off
í Factory configured - do not alter	SW/2	On

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
256KB	(2) 414256 & (1) 41256	NONE	NONE
512KB	(2) 414256 & (1) 41256	(2) 414256 & (1) 41256	NONE
640KB	(2) 414256 & (1) 41256	(2) 414256 & (1) 41256	(2) 414256 & (1) 41256

DRAM SWITCH CONFIGURATION		
Size	SW/3	SW/4
256KB	Off	On
512KB	On	Off
640KB	Off	Off

MONITOR DISPLAY CONFIGURATION		
Display	SW/5	SW/6
Color (40 x 25)	Off	On
Color (80 x 25)	On	Off
Monochrome	Off	Off

FLOPPY DRIVE CONFIGURATION		
Drives installed	SW/7	SW/8
1	On	On
2	Off	On
3	On	Off
4	Off	Off