


# DEICO ELECTRONICS, INC.

## V - 3 8 6

<b>Processor</b>	80386SX
<b>Processor Speed</b>	20/25MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	8MB
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, serial ports (2)
<b>NPU Options</b>	80387SX

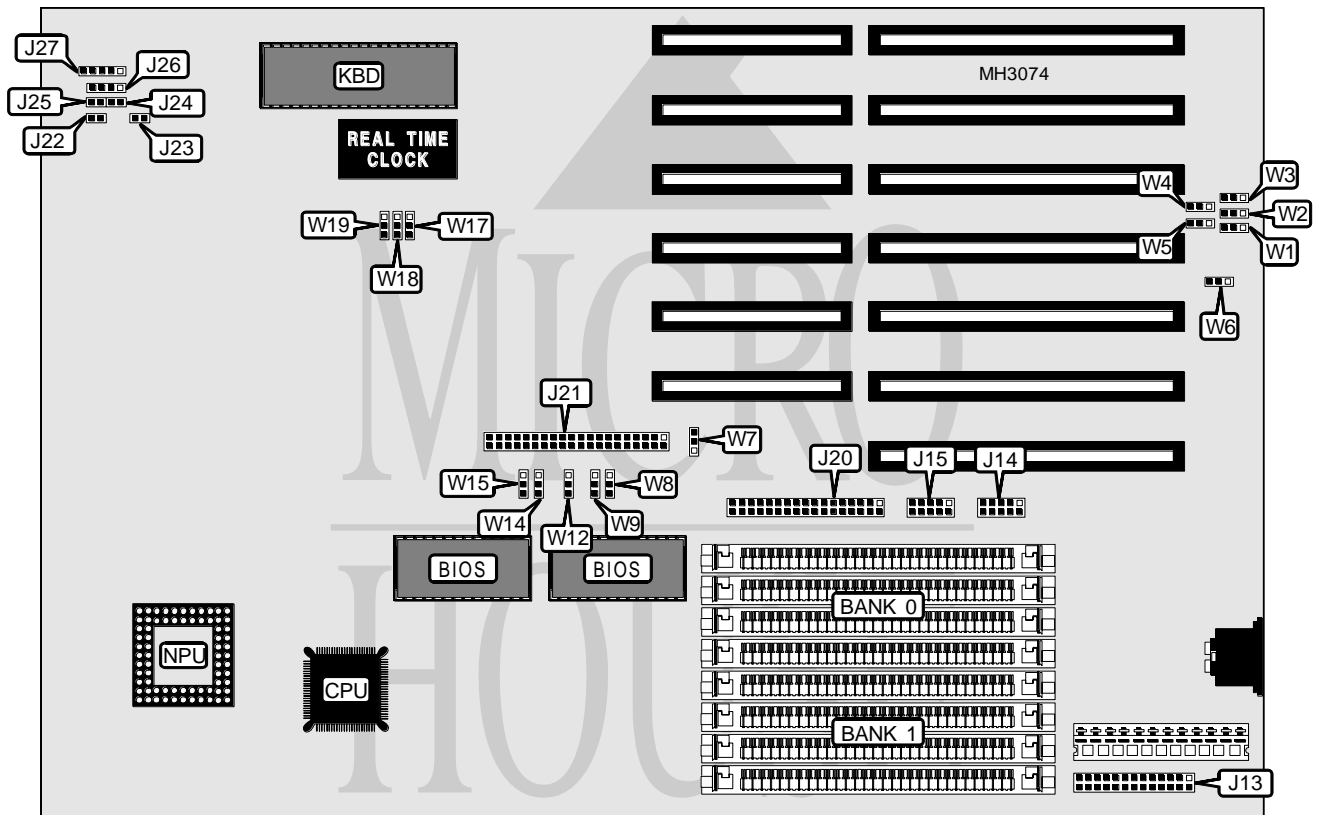

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	J13	IDE interface LED	J23
Serial port 1	J14	Turbo switch	J24
Serial port 2	J15	Reset switch	J25
Floppy drive interface	J20	Speaker	J26
IDE interface	J21	Power LED & keylock	J27
Turbo LED	J22		

Continued on next page. . .

## DEICO ELECTRONICS, INC.

## V - 386

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Jumper	Position
í Parallel port enabled	W1	pins 2 & 3 closed
Parallel port disabled	W1	pins 1 & 2 closed
í Serial port 2 enabled	W2	pins 2 & 3 closed
Serial port 2 disabled	W2	pins 1 & 2 closed
í Serial port 1 enabled	W3	pins 2 & 3 closed
Serial port 1 disabled	W3	pins 1 & 2 closed
í Parallel port LPT select LPT1	W4	pins 1 & 2 closed
Parallel port LPT select LPT2	W4	pins 2 & 3 closed
í Parallel port IRQ select IRQ7	W5	pins 1 & 2 closed
Parallel port IRQ select IRQ5	W5	pins 2 & 3 closed
í IDE interface enabled	W6	pins 1 & 2 closed
IDE interface disabled	W6	pins 2 & 3 closed
í Floppy drive interface enabled	W7	pins 1 & 2 closed
Floppy drive interface disabled	W7	pins 2 & 3 closed
í Memory page size select 2KB	W16	pins 2 & 3 closed
Memory page size select 4KB	W16	pins 1 & 2 closed
í Monitor type select color	W17	pins 1 & 2 closed
Monitor type select monochrome	W17	pins 2 & 3 closed
í NPU disabled	W18	pins 1 & 2 closed
NPU enabled	W18	pins 2 & 3 closed
í I/O wait state select 6 wait states	W19	pins 1 & 2 closed
I/O wait state select 4 wait states	W19	pins 2 & 3 closed

Note: The location of W16 is unidentified.

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	NONE
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	NONE
8MB	(4) 1M x 9	(4) 1M x 9

DRAM JUMPER CONFIGURATION					
Size	W8	W9	W12	W14	W15
1MB	2 & 3	2 & 3	2 & 3	2 & 3	2 & 3
2MB	2 & 3	2 & 3	1 & 2	2 & 3	2 & 3
4MB	1 & 2	2 & 3	2 & 3	1 & 2	1 & 2
8MB	1 & 2	1 & 2	1 & 2	1 & 2	1 & 2

Note: Pins designated should be in the closed position.