


QDI COMPUTER, INC.

US486 P3

Processor	80486SX/80487SX/80486DX/80486DX2
Processor Speed	25/33/40/50(internal)/50/66(internal)MHz
Chip Set	UMC
Maximum Onboard Memory	128MB
Cache	32/64/128/256KB
BIOS	AMI
Dimensions	250mm x 220mm
I/O Options	32-bit VESA local bus slots (3)
NPU Options	None

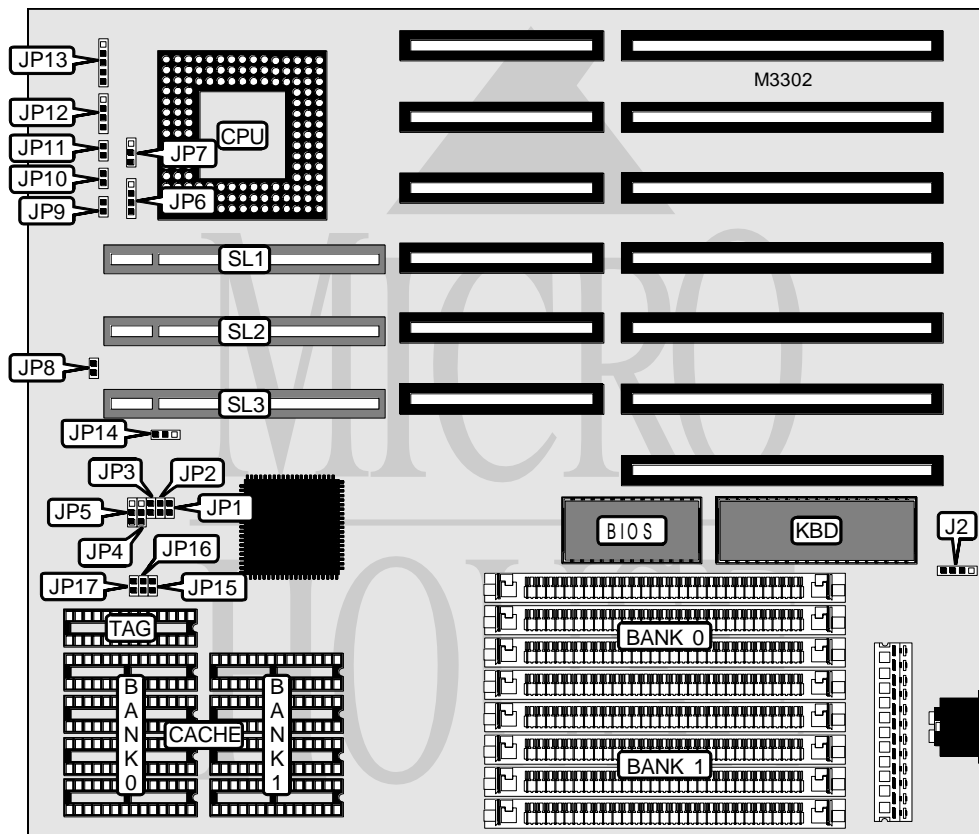

CONNECTIONS				
Function		Label	Function	
Function	Label	Function	Label	
External battery	J2	Speaker	JP12	
Reset switch	JP9	Power LED & keylock	JP13	
Turbo switch	JP10	32-bit VESA local bus slots	SL1 - SL3	
Turbo LED	JP11			

Continued on next page. . .

QDI COMPUTER, INC.
US486 P3

... continued from previous page

USER CONFIGURABLE SETTINGS		
Setting	Label	Position
í Jumper information unavailable	JP4	N/A

DRAM		
Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9
64MB	(4) 16M x 9	None
128MB	(4) 16M x 9	(4) 16M x 9

CACHE SIZE			
Size	Bank 0	Bank 1	TAG
32KB	(4) 8K x 8	None	(1) 8K x 8
64KB	(4) 8K x 8	(4) 8K x 8	(1) 8K x 8
128KB	(4) 32K x 8	None	(1) 8K x 8
256KB	(4) 32K x 8	(4) 32K x 8	(1) 32K x 8

CACHE JUMPER				
Size	JP1	JP2	JP3	JP5
32KB	Open	Open	Open	Open
64KB	Closed	Open	Open	Open
128KB	Closed	Closed	Open	Pins 2 & 3 closed
256KB	Closed	Closed	Closed	Pins 1 & 2 closed

CPU TYPE				
Setting	JP6	JP7	JP8	JP14
80486SX	2 & 3	Open	Open	1 & 2
80487SX	1 & 2, 3 & 4	1 & 2	Open	1 & 2
80486DX-25/33	1 & 2, 3 & 4	2 & 3	Open	1 & 2
80486DX-40/50	1 & 2, 3 & 4	2 & 3	Closed	2 & 3
80486DX2	1 & 2, 3 & 4	2 & 3	Open	1 & 2

Note: Pins designated should be in the closed position.

Continued on next page...

QDI COMPUTER, INC.
US486 P3*... continued from previous page*

CPU SPEED			
Setting	JP15	JP16	JP17
25MHz	Open	Open	Closed
33MHz	Closed	Open	Open
40MHz	Closed	Closed	Open
50MHz	Open	Open	Closed
50MHz	Open	Closed	Open
66MHz	Closed	Open	Open