


**DTK COMPUTER, INC.**  
**P T M - 1 2 0 0**

<b>Processor</b>	80286 (exact location unidentified)
<b>Processor Speed</b>	12MHz
<b>Chip Set</b>	Unidentified
<b>Max. Onboard DRAM</b>	1MB
<b>Cache</b>	None
<b>BIOS</b>	IBM/DTK
<b>Dimensions</b>	355mm x 305mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

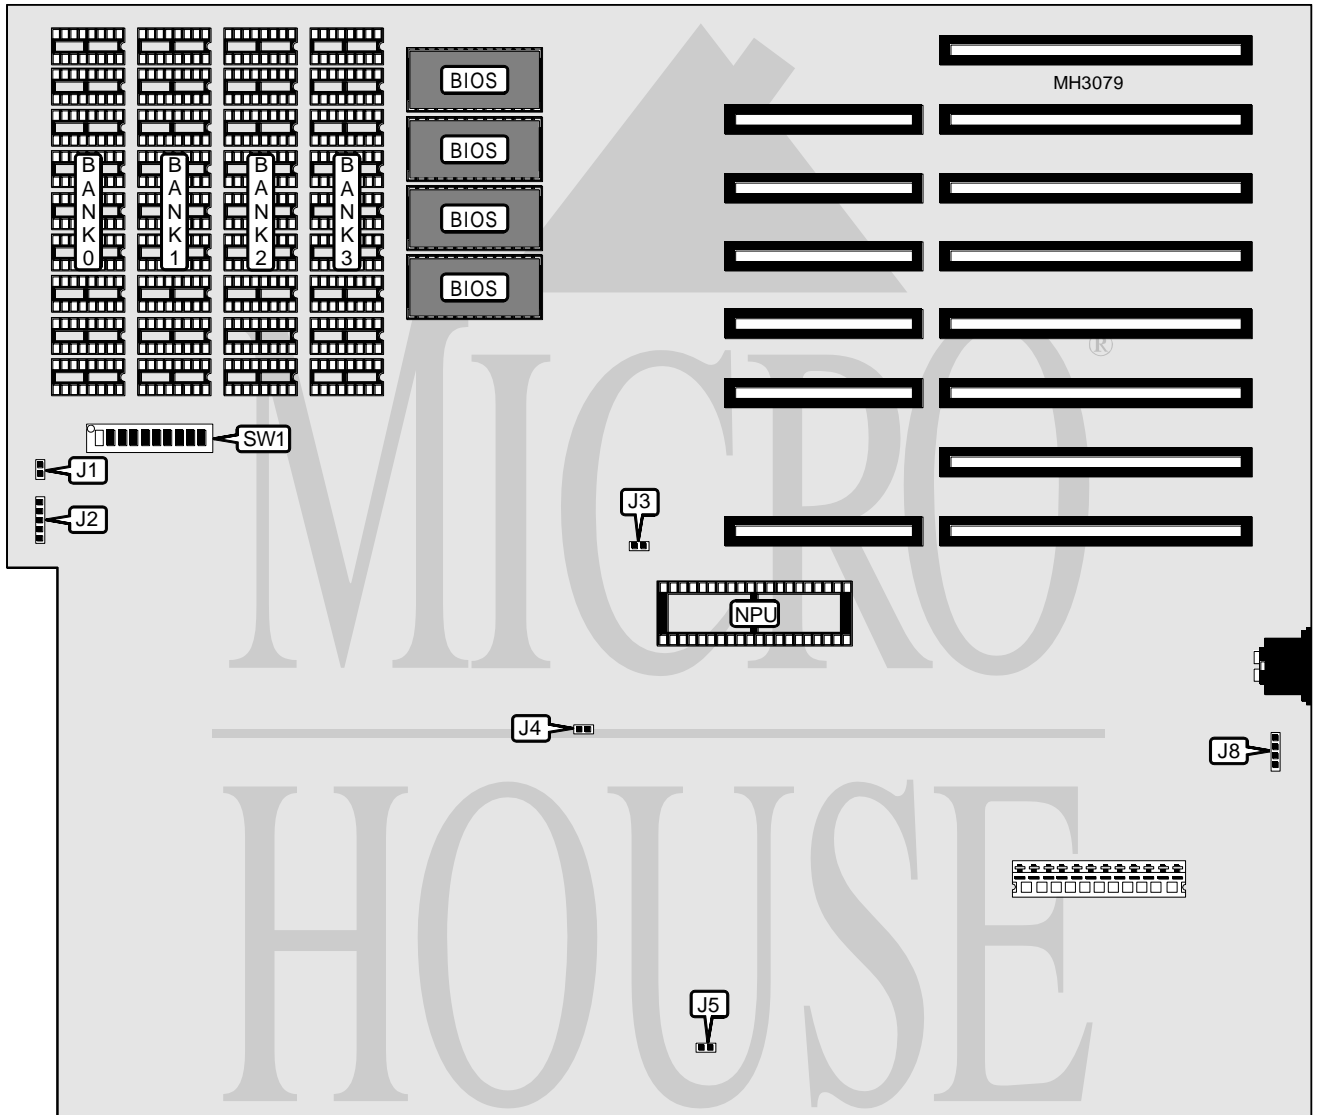

*Continued on next page. . .*

# DTK COMPUTER, INC.

## PTM - 1200

... continued from previous page

### CONNECTIONS

Purpose	Location	Purpose	Location
Speaker	J1	Turbo LED	J4
Power LED & keylock	J2	Turbo switch	J5
Reset switch	J3	External battery	J8

### USER CONFIGURABLE SETTINGS

Function	Switch	Position
Monitor type select color	SW1/6	On
Monitor type select monochrome	SW1/6	Off

### DRAM CONFIGURATION

Size	Bank 0	Bank 1	Bank 2	Bank 3
512KB	(9) 41256	(9) 41256	NONE	NONE
640KB	(9) 41256	(9) 41256	(9) 4164	(9) 4164
1MB	(9) 41256	(9) 41256	(9) 41256	(9) 41256

### DRAM SWITCH CONFIGURATION

Base memory	Extended	Total memory	SW1/2	SW1/3
640KB	NONE	640KB	N/A	On
640KB	NONE	640KB	N/A	On
640KB	384KB	1MB	On	N/A
512KB	512KB	1MB	Off	N/A

### DRAM WAIT STATE CONFIGURATION

DRAM bank	Wait state	SW1/1	SW1/4	SW1/5
Banks 1 - 4	1	On	Off	Off
Banks 0 & 1	0	Off	Off	N/A
Banks 0 & 1	1	Off	On	N/A
Banks 2 & 3	0	Off	N/A	Off
Banks 2 & 3	1	Off	N/A	On

### BIOS CONFIGURATION

Size	SW1/7	SW1/8	SW1/9	SW1/10
27128	On	On	Off	Off
27256	Off	Off	On	On