


# STANDARD BRAND PRODUCTS

## STANDARD 286/10

|                               |   |
|-------------------------------|---|
| <b>Processor</b>              | 80286 (exact location unidentified)           |
| <b>Processor Speed</b>        | 6/10MHz                                       |
| <b>Chip Set</b>               | Unidentified                                  |
| <b>Video Chip Set</b>         | None  |
| <b>Maximum Onboard Memory</b> | 1MB (board will accept memory card with 16MB) |
| <b>Maximum Video Memory</b>   | None  |
| <b>Cache</b>                  | None  |
| <b>BIOS</b>                   | Phoenix                                       |
| <b>Dimensions</b>             | 355mm x 304mm                                 |
| <b>I/O Options</b>            | None  |
| <b>NPU Options</b>            | 80287 (exact location unidentified)           |

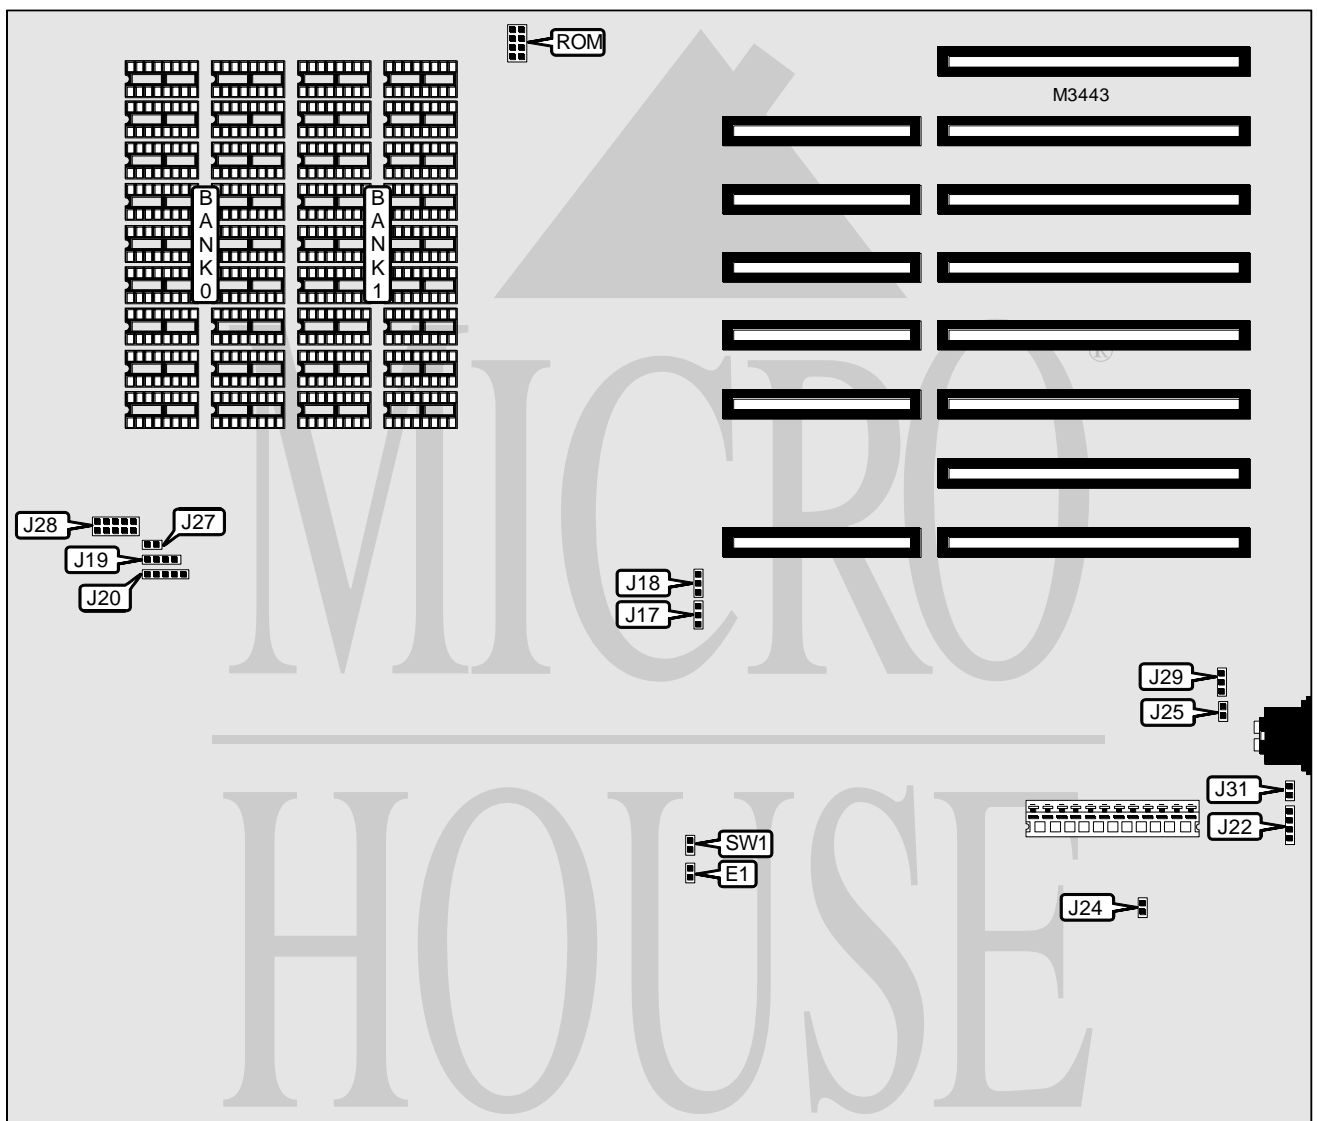

*Continued on next page...*

# STANDARD BRAND PRODUCTS

## STANDARD 286/10

... continued from previous page

| CONNECTIONS         |          |              |          |
|---------------------|----------|--------------|----------|
| Purpose             | Location | Purpose      | Location |
| Speaker             | J19      | Reset switch | J24      |
| Power LED & keylock | J20      | Turbo LED    | J27      |
| External battery    | J22      |              |          |

| USER CONFIGURABLE SETTINGS                                       |       |                          |
|--|-------|--------------------------|
| Function   | Label | Position                 |
| DRAM wait state select wait states enabled (board speed 6/10MHz) | E1    | Open                     |
| DRAM wait state select 0 wait states (board speed 10MHz)         | E1    | Closed                   |
| Jumper information unidentified                                  | J28   | Unidentified             |
| NPU speed select   | J29   | Unidentified             |
| Battery type select non-rechargeable                             | J31   | Open                     |
| Battery type select rechargeable                                 | J31   | Closed                   |
| BIOS type select 27256   | ROM   | Pins 5 & 6, 7 & 8 closed |
| BIOS type select 27128   | ROM   | Pins 1 & 2, 3 & 4 closed |
| Monitor type select color  | SW1   | Closed                   |
| Monitor type select monochrome                                   | SW1   | Open                     |

| DRAM CONFIGURATION |            |            |
|--------------------|------------|------------|
| Size               | Bank 0     | Bank 1     |
| 512KB              | (18) 41256 | None       |
| 640KB              | (18) 41256 | (18) 4164  |
| 1MB (512KB/512KB)  | (18) 41256 | (18) 41256 |
| 1MB (640KB/384KB)  | (18) 41256 | (18) 41256 |

| DRAM JUMPER CONFIGURATION |                   |                   |
|---------------------------|-------------------|-------------------|
| Size                      | J17               | J18               |
| 512KB                     | Pins 2 & 3 closed | Pins 2 & 3 closed |
| 640KB                     | Pins 2 & 3 closed | Pins 1 & 2 closed |
| 1MB (512KB/512KB)         | Pins 1 & 2 closed | Pins 1 & 2 closed |
| 1MB (640KB/384KB)         | Pins 1 & 2 closed | Pins 2 & 3 closed |

| CPU SPEED SELECTION |        |
|---------------------|--------|
| Speed               | J25    |
| 6MHz                | Open   |
| 10MHz               | Closed |