



# AT & T, INC.

## AT & T, INC. GLOBALYST 590

<b>Processor</b>	Pentium
<b>Processor Speed</b>	60/66MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	ATI
<b>Maximum Onboard Memory</b>	128MB
<b>Maximum Video Memory</b>	2MB
<b>Cache</b>	256KB
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA/VESA pass through connector, VGA port, riser slot
<b>NPU Options</b>	None

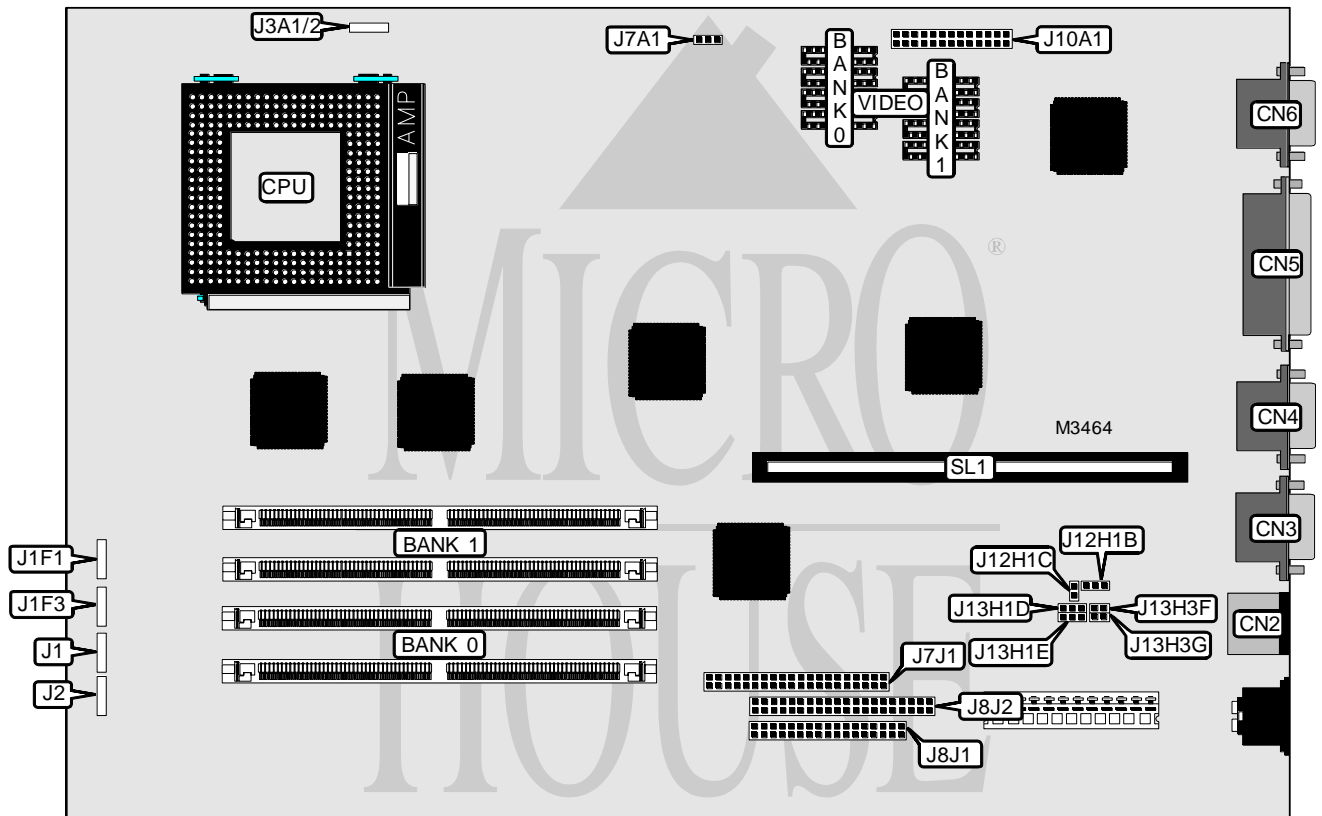

Continued on next page . . .

AT &amp; T, INC.

AT &amp; T, INC. GLOBALYST 590

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN2	Power LED & keylock	J1F3
Serial port 2	CN3	IDE interface LED	J1G1
Serial port 1	CN4	Chassis fan power	J3A1/2
Parallel port	CN5	PCI IDE interface	J7J1
VGA port	CN6	Floppy drive interface	J8J1
Front panel LEDs	J1	ISA IDE interface	J8J2
Front panel LEDs	J2	VGA/VESA graphics pass through connector	J10A1
Speaker	J1F1	Riser slot	SL1

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Flash BIOS normal operation	J12H1B	Pins 1 & 2 closed
Flash BIOS recovery mode	J12H1B	Pins 2 & 3 closed
í Flash BIOS update disabled	J12H1C	Closed
Flash BIOS update enabled	J12H1C	Open
í CMOS memory normal operation	J13H1D	Pins 1 & 2 closed
CMOS memory clear	J13H1D	Pins 2 & 3 closed
í Password normal operation	J13H1E	Pins 1 & 2 closed
Password clear	J13H1E	Pins 2 & 3 closed
í Monitor type select color	J13H3F	Closed
Monitor type select monochrome	J13H3F	Open
í Setup access enabled	J13H3G	Closed
Setup access disabled	J13H3G	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36
64MB	(2) 8M x 36	None
72MB	(2) 8M x 36	(2) 1M x 36
80MB	(2) 8M x 36	(2) 2M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

Continued on next page. . .

AT &amp; T, INC.

AT &amp; T, INC. GLOBALYST 590

... continued from previous page

**CACHE CONFIGURATION**

Note: The location and chip sizes of the 256KB cache is unidentified.

**VIDEO MEMORY CONFIGURATION**

Size	Bank 0	Bank 1
1MB	(8) 256K x 4	None
2MB	(8) 256K x 4	(8) 256K x 4

**CPU SPEED SELECTION**

Speed	J7A1
60MHz	Pins 2 & 3 closed
66MHz	Pins 1 & 2 closed