AT & T
MODEL 6286/EL WGS (FM-0589-04)

Processor	AM80286
Processor Speed	12.5MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	4MB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VGA port, riser slot
NPU Options	80287
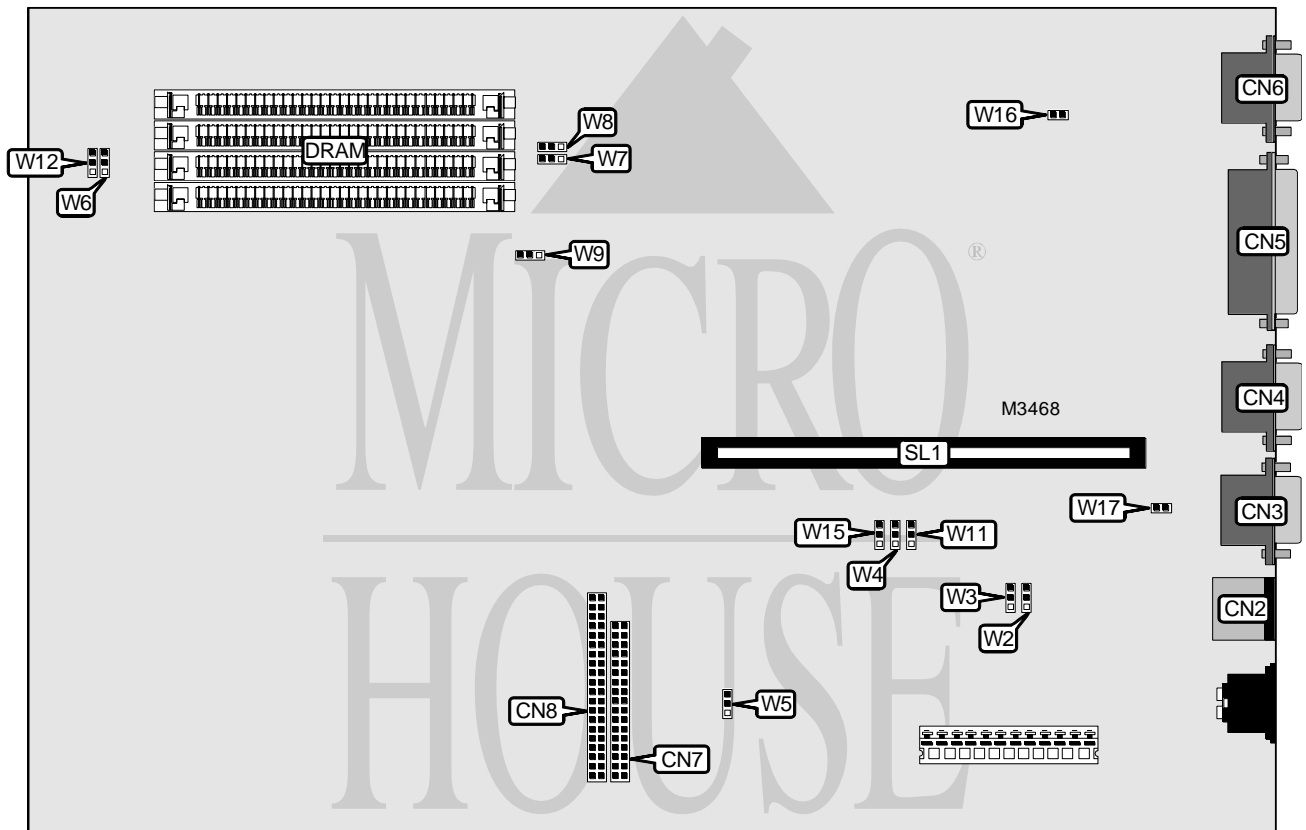
CONNECTIONS			
Purpose	**Location**	**Purpose**	**Location**
PS/2 mouse port	CN2	VGA port	CN6
Serial port	CN3	Floppy drive interface	CN7
Serial port	CN4	IDE interface	CN8
Parallel port	CN5	Riser slot	SL1

AT & T
MODEL 6286/EL WGS (FM-0589-04)

USER CONFIGURABLE SETTINGS		
Function	**Label**	**Position**
í Password normal operation	W2	Pins 1 & 2 closed
Password clear	W2	Pins 2 & 3 closed
í Monitor type select color	W3	Pins 2 & 3 closed
Monitor type select monochrome	W3	Pins 1 & 2 closed
í Floppy drive interface enabled	W4	Pins 2 & 3 closed
Floppy drive interface disabled	W4	Pins 1 & 2 closed
í Factory configured - do not alter	W5	Pins 1 & 2 closed
í Speaker type select onboard	W6	Pins 1 & 2 closed
Speaker type select offboard	W6	Pins 2 & 3 closed
í Video display type select VGA	W7	Pins 2 & 3 closed
Video display type select multisync	W7	Pins 1 & 2 closed
í Video BIOS type select PS/2	W8	Pins 1 & 2 closed
Video BIOS type select PC/AT	W8	Pins 2 & 3 closed
í NPU speed select 6.25MHz	W9	Pins 2 & 3 closed
NPU speed select 12.5MHz	W9	Pins 1 & 2 closed
í On board video enabled	W11	Pins 2 & 3 closed
On board video disabled	W11	Pins 1 & 2 closed
í IDE interface LED enabled	W12	Pins 2 & 3 closed
IDE interface LED disabled	W12	Pins 1 & 2 closed
í Factory configured - do not alter	W15	Pins 2 & 3 closed
í PS/2 mouse IRQ12 enabled	W16	Closed
PS/2 mouse IRQ12 disabled	W16	Open
í Factory configured - do not alter	W17	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	None
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	None
2.5MB	(2) 1M x 9	(2) 256K x 9
4MB	(2) 1M x 9	(2) 1M x 9
Note: The location of banks 0 & 1 are unidentified.		