## NCR CORPORATION


## MODEL 3306-XXXX PC286ISA 12/16MHZ

80286 **Processor Processor Speed** 12/16MHz **Chip Set** Unidentified **Video Chip Set** Unidentified **Maximum Onboard Memory** 5MB **Maximum Video Memory** 256KB Cache None **BIOS** Unidentified **Dimensions** 254mm x 218mm

I/O Options Floppy drive interface, IDE interface, parallel port, serial ports (2), VGA port,

riser slot, volume control

**NPU Options** 80287

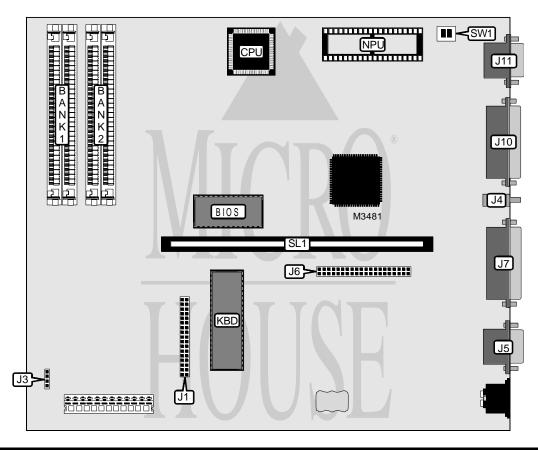

CONNECTIONS				
Purpose	Location	Purpose	Location	
Floppy drive interface	J1	Serial port 1	J7	
Power LED & keylock	J3	Parallel port	J10	
Volume control	J4	VGA port	J11	
Serial port 2	J5	Riser slot	SL1	
IDE interface	J6			

Continued on next page. . .

## NCR CORPORATION MODEL 3306-XXXX PC286ISA 12/16MHZ

. . . continued from previous page

USER CONFIGUR	ABLE SETTINGS	
Function	Label	Position
í On board video enabled	SW1/1	Off
On board video disabled	SW1/1	On
í Monitor type select color	SW1/2	On
Monitor type select monochrome	SW1/2	Off

	DRAM CONI	FIGURATION	
Size	Bank 0	Bank 1	Bank 2
1MB	1MB	None	None
3MB	1MB	(2) 1M x 9	None
5MB	1MB	(2) 1M x 9	(2) 1M x 9
Note: Bank 0 is factory insta	alled and is not configurable.	The location of Bank 0 is unide	entified.

VIDEO MEMORY CONFIGURATION
Note: 256KB video memory is factory installed and is not configurable.