


# AT & T

## MODEL 6386/25 WGS (FM-0589-06)

<b>Processor</b>	80386
<b>Processor Speed</b>	25MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	8MB (32MB on external memory cards)
<b>Maximum Video Memory</b>	None
<b>Cache</b>	64KB
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	355mm x 304mm
<b>I/O Options</b>	External memory cards (2), parallel port, PS/2 mouse port, serial ports (2)
<b>NPU Options</b>	80387/3167

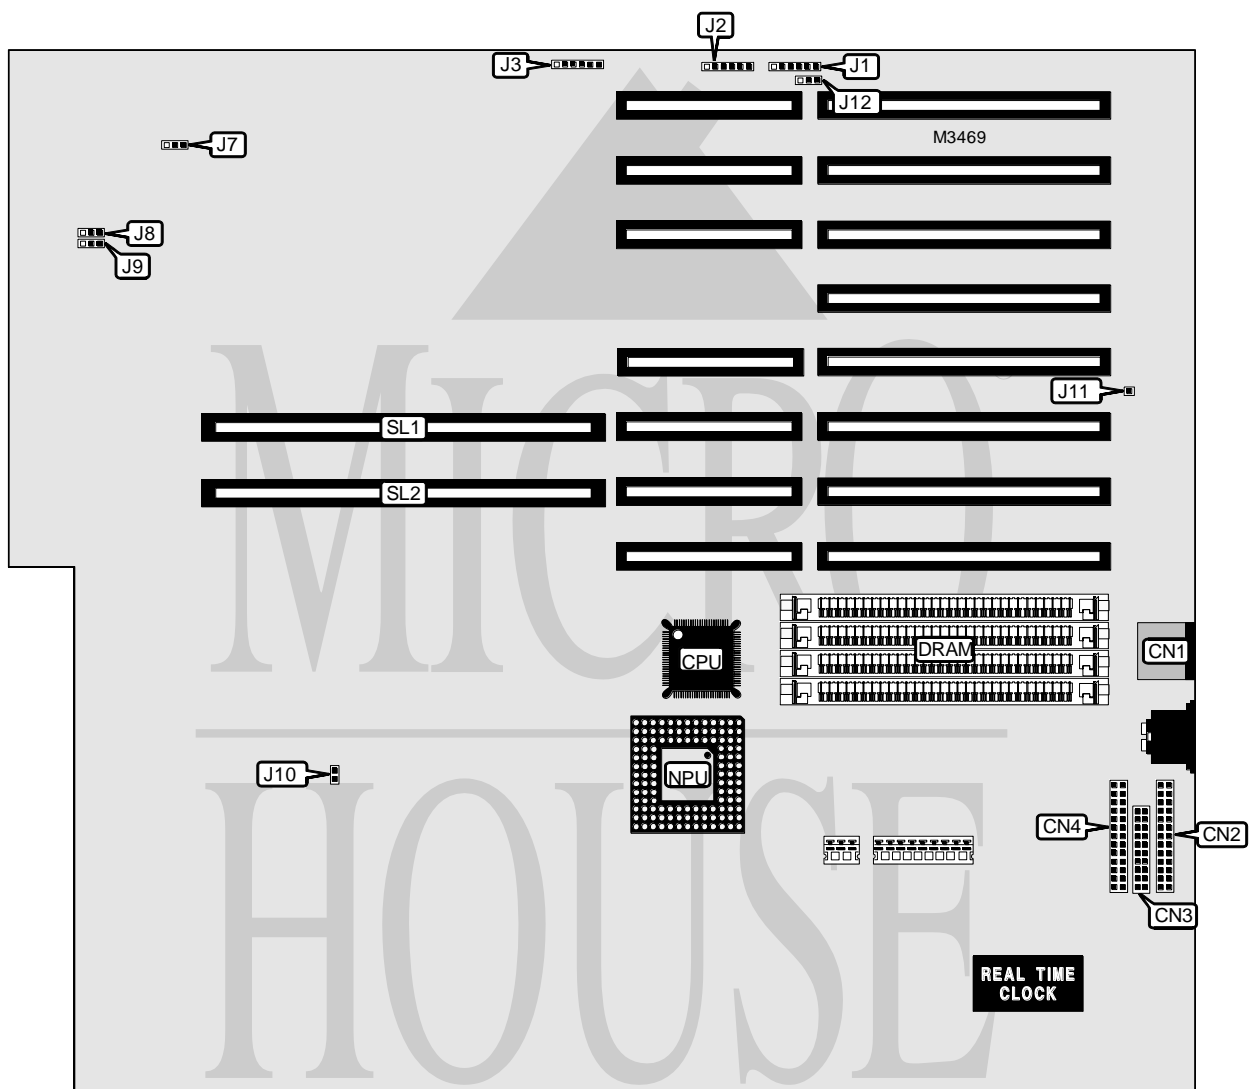

*Continued on next page. . .*

# AT & T

## MODEL 6386/25 WGS (FM-0589-06)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	Serial port	CN4
Parallel port	CN2	Remote reset switch	J11
Serial port	CN3	External memory cards	SL1 & SL2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Monitor type select color	J3	Pins 1 & 2 closed
Monitor type select monochrome	J3	Pins 2 & 3 closed
í Password normal operation	J3	Pins 4 & 5 closed
Password clear	J3	Pins 5 & 6 closed
BIOS type select 64KB	J7	Pins 2 & 3 closed
BIOS type select 128KB	J7	Pins 1 & 2 closed
í Factory configured - do not alter	J10	Closed
í Printer acknowledge signal edge trailing edge	J12	Pins 1 & 2 closed
Printer acknowledge signal edge leading edge	J12	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	None

Note: The location of the banks is unidentified.

DRAM JUMPER CONFIGURATION		
Size	J8	J9
4MB	Pins 2 & 3 closed	Pins 1 & 2 closed
8MB	Pins 2 & 3 closed	Pins 2 & 3 closed

CACHE CONFIGURATION
Note: The location of the 64KB cache is unidentified.

PARALLEL PORT ADDRESS SELECTION	
Setting	J1
LPT1	Pins 1 & 2, 5 & 6 closed
LPT2	Pins 2 & 3, 4 & 5 closed
Disabled	Pins 1 & 2, 4 & 5 closed


SERIAL PORT 1 ADDRESS SELECTION	
Setting	J2
COM1 (3F8h)	Pins 5 & 6 closed
Disabled	Pins 4 & 5 closed

Continued on next page...

# AT & T MODEL 6386/25 WGS (FM-0589-06)

... continued from previous page

SERIAL PORT 2 ADDRESS SELECTION	
Setting	J2
COM2 (2F8h)	Pins 2 & 3 closed
Disabled	Pins 1 & 2 closed

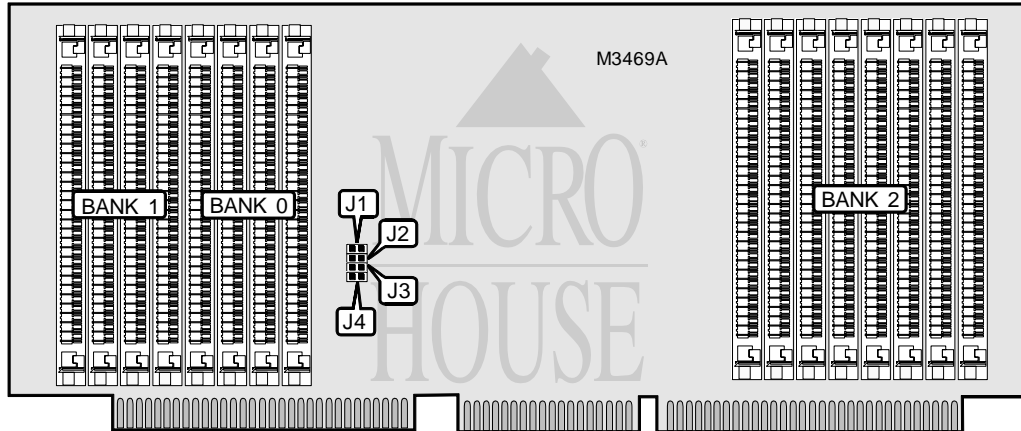

EXTERNAL MEMORY CARD

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
4MB	(4) 1M x 9	None	None
8MB	(4) 1M x 9	(4) 1M x 9	None
16MB	(4) 1M x 9	(4) 1M x 9	(8) 1M x 9

DRAM JUMPER CONFIGURATION				
Size	J1	J2	J3	J4
4MB	Closed	Open	Open	Closed
8MB	Open	Closed	Closed	Open
16MB	Closed	Closed	Open	Open