


# AT & T MODEL 6286 WGS (FM-0589-03)

<b>Processor</b>	80286
<b>Processor Speed</b>	12MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	2MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	Unidentified
<b>I/O Options</b>	Parallel port
<b>NPU Options</b>	80287

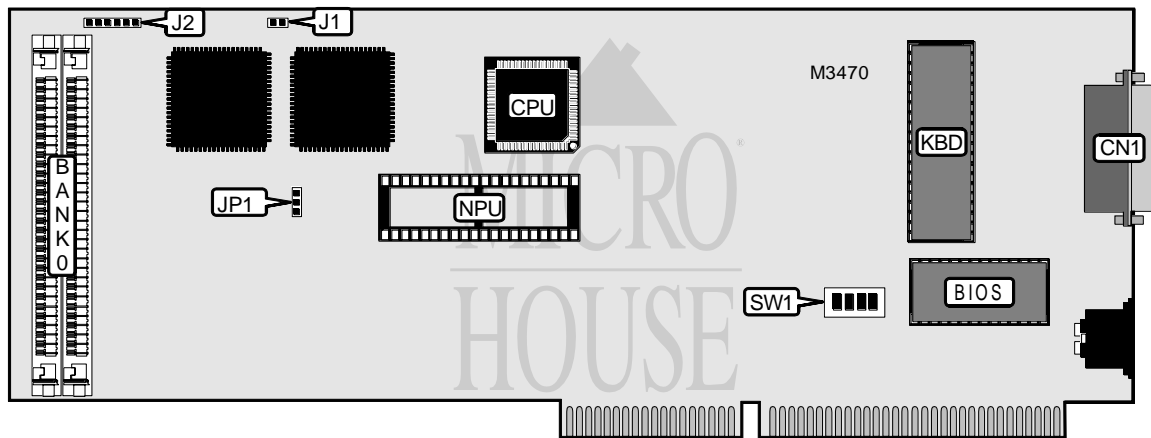

CONNECTIONS			
Purpose	Location	Purpose	Location
Parallel port	CN1	Alternate console connector	J2
External battery	J1		

*Continued on next page...*

# AT & T

## MODEL 6286 WGS (FM-0589-03)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	SW1/1	Off
í Factory configured - do not alter	SW1/2	Off
VDC 400 used	SW1/3	Off
VDC 600 or 750 used	SW1/3	On
í Factory configured - do not alter	SW1/4	Off

DRAM CONFIGURATION	
Size	Bank 0
1MB	(2) 512K x 9
2MB	(2) 1M x 9

DRAM JUMPER CONFIGURATION	
Size	JP1
1MB	Pins 1 & 2 closed
2MB	Pins 2 & 3 closed