


# UNIDENTIFIED 386WB CACHE

<b>Processor</b>	80386DX
<b>Processor Speed</b>	33/40MHz
<b>Chip Set</b>	OPTI
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	64MB (32MB on external memory card)
<b>Maximum Video Memory</b>	None
<b>Cache</b>	32/64/128/256KB
<b>BIOS</b>	AMI
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	External memory card
<b>NPU Options</b>	80387DX/3167

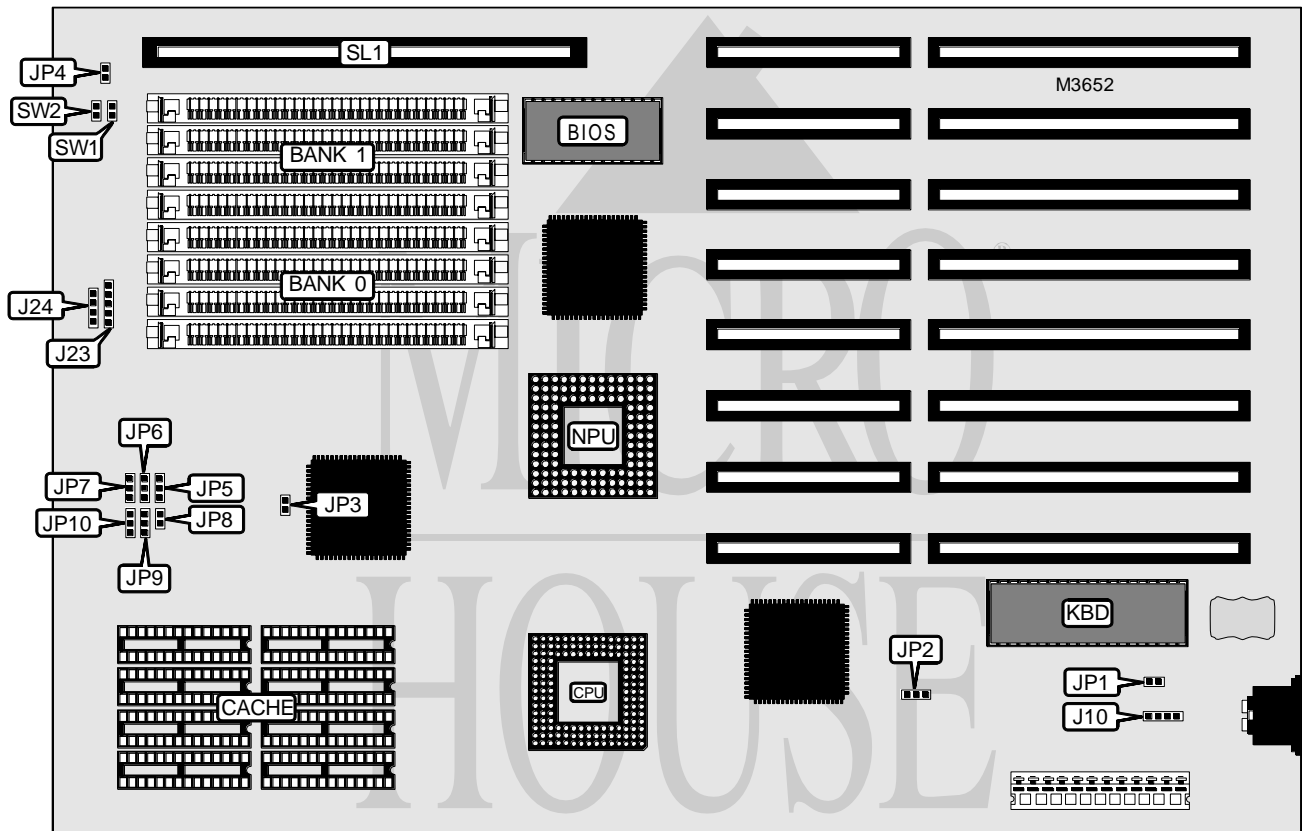

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J10	External memory card	SL1
Power LED & keylock	J23	Reset switch	SW1
Speaker	J24	Turbo switch	SW2
Turbo LED	JP4		

Continued on next page . . .

# UNIDENTIFIED

## 386WB CACHE

... continued from previous page

### USER CONFIGURABLE SETTINGS

Function	Label	Position
Monitor type select CGA/EGA/PGA/VGA	JP1	Closed
Monitor type select monochrome	JP1	Open
í CMOS memory normal operation	JP2	Pins 2 & 3 closed
CMOS memory clear	JP2	Pins 1 & 2 closed
I/O bus speed select ATCLK/8	JP3	Closed
I/O bus speed select ATCLK/6	JP3	Open

### DRAM CONFIGURATION

Size	Bank 0	Bank 1
1MB	(4) 256K x 9	None
2MB	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None
5MB	(4) 1M x 9	(4) 256K x 9
8MB	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None
17MB	(4) 4M x 9	(4) 256K x 9
20MB	(4) 4M x 9	(4) 1M x 9
32MB	(4) 4M x 9	(4) 4M x 9

### CACHE CONFIGURATION

Size	Bank 0	Bank 1
32KB	(4) 8K x 8	None
64KB	(4) 8K x 8	(4) 8K x 8
128KB	(4) 32K x 8	None
256KB	(4) 32K x 8	(4) 32K x 8

### CACHE JUMPER CONFIGURATION

Size	JP5	JP6	JP7	JP8	JP9	JP10
32KB	1 & 2	1 & 2	1 & 2	Open	2 & 3	2 & 3
64KB	2 & 3	1 & 2	1 & 2	Open	2 & 3	1 & 2
128KB	2 & 3	1 & 2	2 & 3	Closed	2 & 3	1 & 2
256KB	2 & 3	2 & 3	2 & 3	Closed	1 & 2	1 & 2

Note: Pins designated should be in the closed position.