


UNIDENTIFIED NESX

Processor	80386SX
Processor Speed	12/16MHz
Chip Set	Neat
Video Chip Set	None
Maximum Onboard Memory	8MB
Maximum Video Memory	None
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80387SX

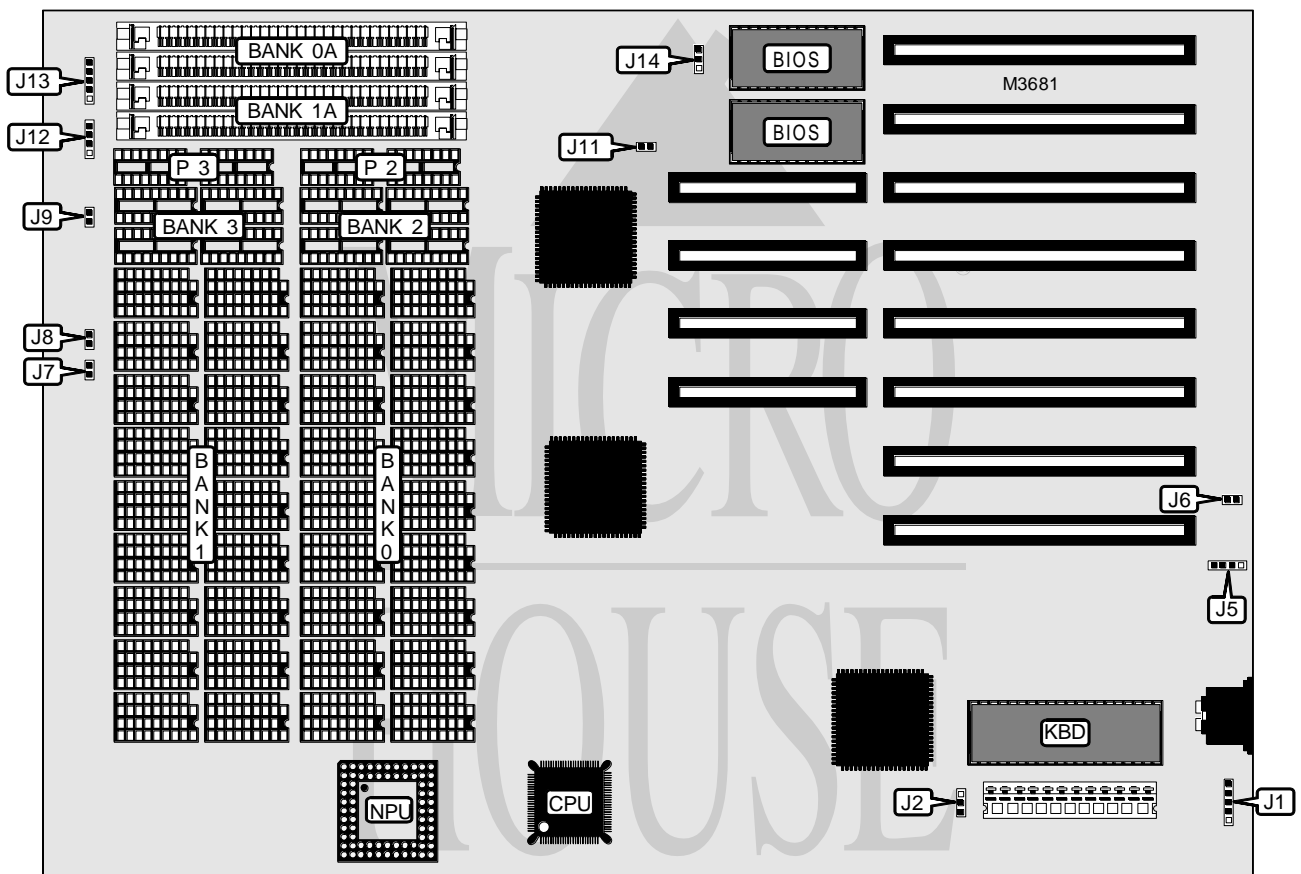

CONNECTIONS			
Purpose	Location	Purpose	Location
Auxiliary keyboard connector	J1	Reset switch	J9
External battery	J5	Speaker	J12
Turbo switch	J7	Power LED & keylock	J13
Turbo LED	J8		

Continued on next page...

UNIDENTIFIED NESX

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Monitor type select color	J2	Pins 1 & 2 closed
Monitor type select monochrome	J2	Pins 2 & 3 closed
í CMOS memory normal operation	J6	Open
CMOS memory clear	J6	Closed
BIOS type select 27128	J14	Pins 1 & 2 closed
BIOS type select 27256	J14	Pins 2 & 3 closed

DRAM CONFIGURATION 1						
Size	Bank 0	Bank 1	Bank 0A	Bank 1A	Bank 2	Bank 3
512KB	(18) 41256	None	None	None	None	None
1MB	(18) 41256	(18) 41256	None	None	None	None
1.5MB	(18) 41256	(18) 41256	None	None	(4) 44256	None
2MB	(18) 41256	(18) 41256	None	None	(4) 44256	(4) 44256
2MB	(18) 411000	None	None	None	None	None
3MB	(18) 41256	(18) 41256	None	(2) 1M x 9	None	None
4MB	(18) 411000	(18) 411000	None	None	None	None
5MB	(18) 41256	(18) 41256	(2) 1M x 9	(2) 1M x 9	None	None
6MB	(18) 411000	(18) 411000	None	(2) 1M x 9	None	None
8MB	(18) 411000	(18) 411000	(2) 1M x 9	(2) 1M x 9	None	None

Note: In addition to the above configurations, banks 2 & 3 also will accept 41256 chips and banks 0A & 1A will accept 256K x 9. If banks 2 & 3 are used, P2 & P3 must be installed with 41256 chips (see DRAM PARITY CONFIGURATION table).

DRAM PARITY CONFIGURATION 1		
Size	P 2	P 3
512KB	None	None
1MB	None	None
1.5MB	(4) 41256	None
2MB	(4) 41256	(4) 41256
2MB	None	None
3MB	None	None
4MB	None	None
5MB	None	None
6MB	None	None
8MB	None	None

Continued on next page...

UNIDENTIFIED NESX

... continued from previous page

DRAM CONFIGURATION 2						
Size	Bank 0	Bank 1	Bank 0A	Bank 1A	Bank 2	Bank 3
512KB	None	None	None	None	None	(4) 44256
1MB	None	None	None	None	(4) 44256	(4) 44256
1.5MB	None	(18) 41256	None	None	(4) 44256	(4) 44256
2MB	(18) 41256	(18) 41256	None	None	(4) 44256	(4) 44256
2MB	None	None	(2) 1M x 9	None	None	None
3MB	None	(18) 411000	None	None	(4) 44256	(4) 44256
4MB	None	None	(2) 1M x 9	(2) 1M x 9	None	None
5MB	(18) 411000	(18) 411000	None	None	(4) 44256	(4) 44256
6MB	None	(18) 411000	(2) 1M x 9	(2) 1M x 9	None	None
8MB	(18) 411000	(18) 411000	(2) 1M x 9	(2) 1M x 9	None	None

DRAM PARITY CONFIGURATION 2		
Size	P 2	P 3
512KB	None	(4) 41256
1MB	(4) 41256	(4) 41256
1.5MB	(4) 41256	(4) 41256
2MB	(4) 41256	(4) 41256
2MB	None	None
3MB	(4) 41256	(4) 41256
4MB	None	None
5MB	(4) 41256	(4) 41256
6MB	None	None
8MB	None	None

DRAM JUMPER CONFIGURATION	
Configuration	J11
1	Closed
2	Open