


LASER COMPUTER, INC. LASER 286X (VER. B)

Processor	80286
Processor Speed	Unidentified
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	1MB
Maximum Video Memory	None
Cache	None
BIOS	IBM/Phoenix
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80287

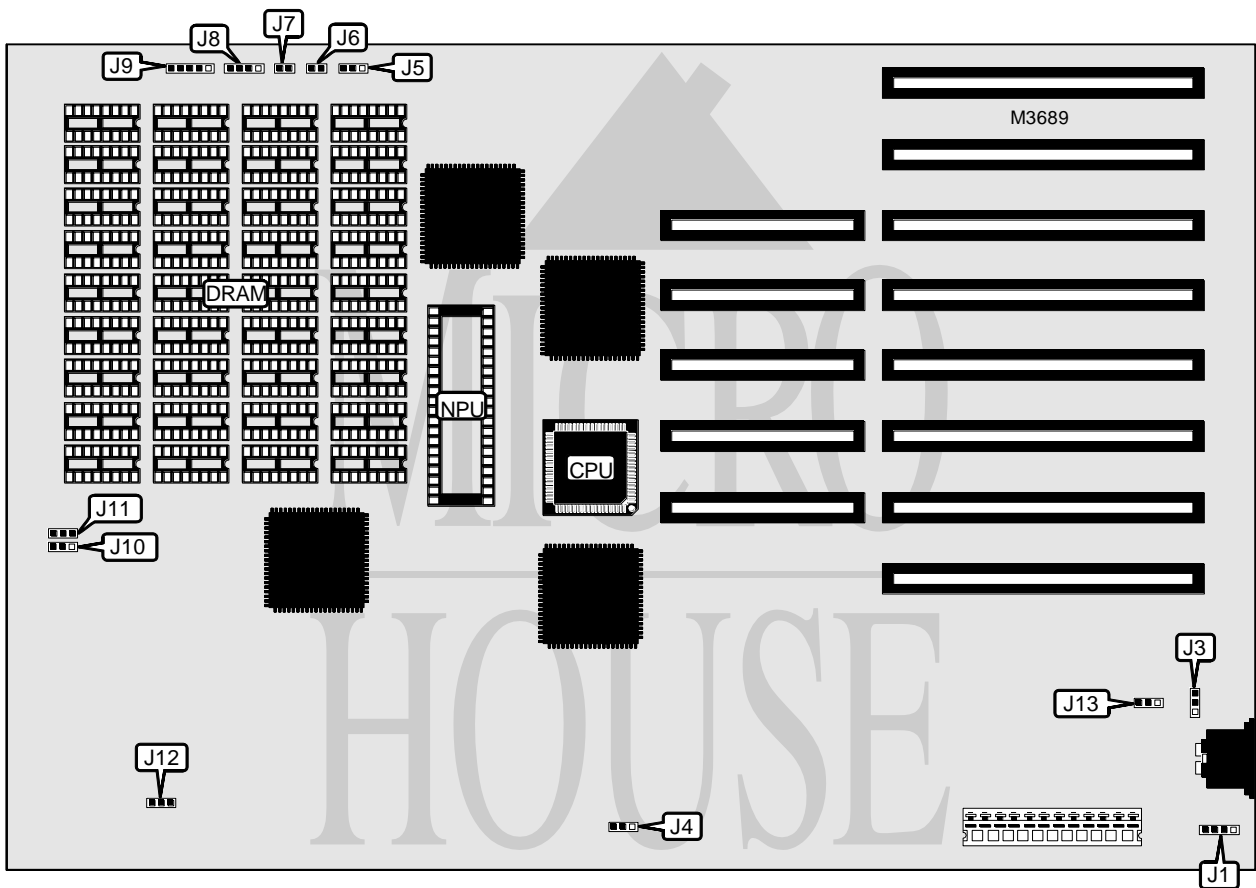

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J1	Reset switch	J7
Turbo switch	J5	Speaker	J8
Turbo LED	J6	Power LED & keylock	J9

Continued on next page...

LASER COMPUTER, INC.
LASER 286X (VER. B)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Monitor type select monochrome	J3	Pins 1 & 2 closed
Monitor type select color	J3	Pins 2 & 3 closed
Parity check disabled	J4	Pins 1 & 2 closed
Parity check enabled	J4	Pins 2 & 3 closed
Wait state select 1 wait state	J10	Pins 1 & 2 closed
Wait state select 0 wait states	J10	Pins 2 & 3 closed
í Factory configured - do not alter	J12	Unidentified
BIOS type select IBM/Phoenix	J13	Pins 1 & 2 closed
BIOS type select all other BIOS types	J13	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
640KB	(18) 41256	(18) 4164
1MB	(18) 41256	(18) 41256

DRAM JUMPER CONFIGURATION	
Size	J11
640KB	Pins 1 & 2 closed
1MB	Pins 2 & 3 closed