


UNIDENTIFIED

AT - 386

Processor	80386
Processor Speed	25MHz
Chip Set	VLSI
Video Chip Set	None
Maximum Onboard Memory	8MB
Maximum Video Memory	None
Cache	None
BIOS	AMI
Dimensions	330mm x 218mm
I/O Options	None
NPU Options	80287/80387/3167

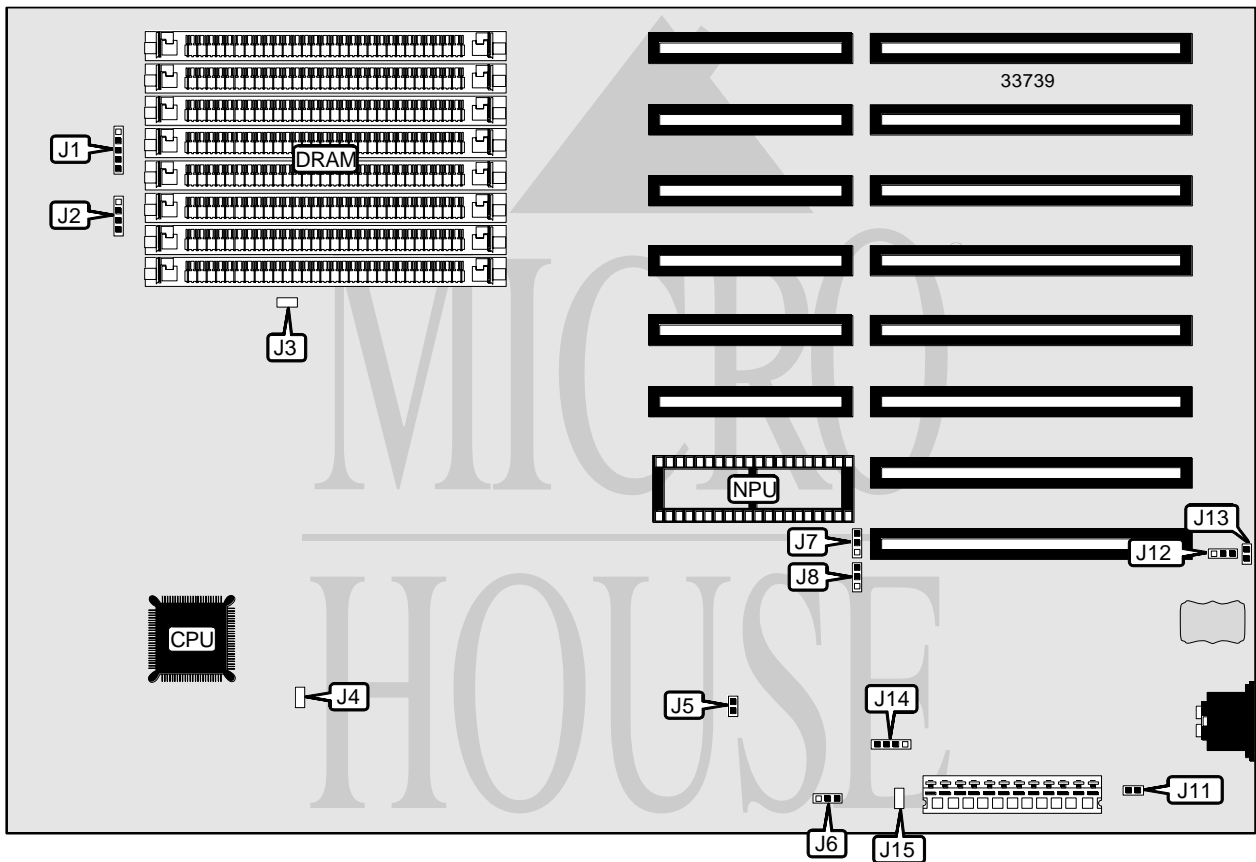

CONNECTIONS			
Purpose	Location	Purpose	Location
Power LED & keylock	J1	Reset switch	J13
Speaker	J2	External battery	J14
MIPS counter	J3	On board LED	J15

Continued on next page. . .

UNIDENTIFIED

AT - 386

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J4	Unidentified
80287 enabled	J5	Closed
80287 disabled	J5	Open
í CMOS memory normal operation	J6	Pins 1 & 2 closed
CMOS memory clear	J6	Pins 2 & 3 closed
Monitor type select color	J11	Closed
Monitor type select monochrome	J11	Open
Reset valid after keyboard is locked	J12	Pins 1 & 2 closed
Reset valid at all times	J12	Pins 2 & 3 closed

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
512MB	(2) 256K x 9	None	None	None
1MB	(2) 256K x 9	(2) 256K x 9	None	None
1.5MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	None
2MB	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	None	None	None
4MB	(2) 1M x 9	(2) 1M x 9	None	None
6MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	None
8MB	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9	(2) 1M x 9

NPU SPEED SELECTION		
Speed	J7	J8
Low speed	Pins 1 & 2 closed	Pins 2 & 3 closed
10MHz	Pins 2 & 3 closed	Pins 1 & 2 closed