


# UNIDENTIFIED

## 386SX-25/33 (ALI M1217)

<b>Processor</b>	80386SX
<b>Processor Speed</b>	25/33MHz
<b>Chip Set</b>	ALI
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	16MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	AMI/Award
<b>Dimensions</b>	220mm x 170mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80387SX

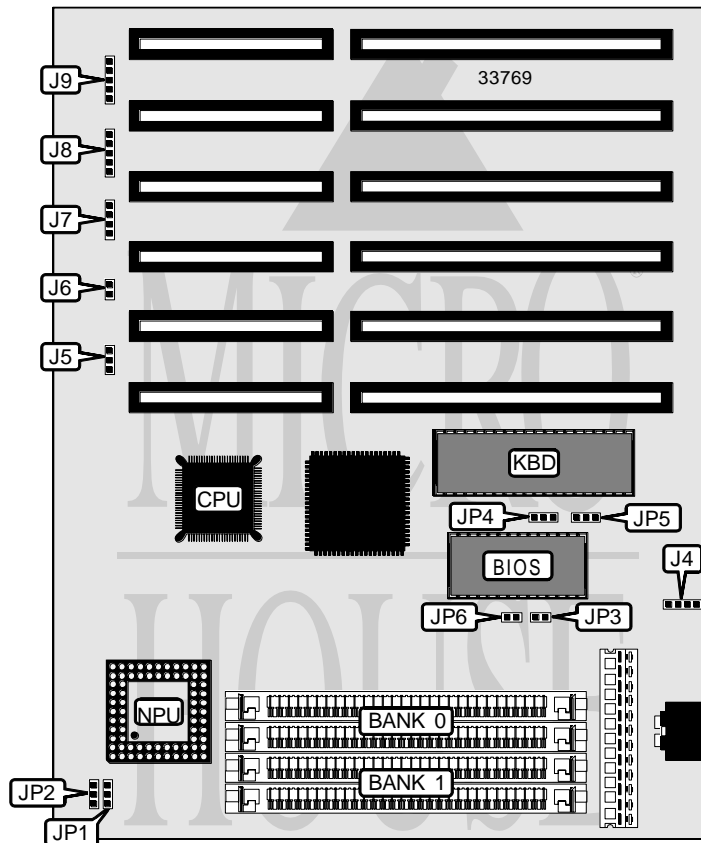

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J4	Turbo switch/LED	J8
Reset switch	J6	Power LED & keylock	J9
Speaker	J7		

Continued on next page. . .

# UNIDENTIFIED

## 386SX-25/33 (ALI M1217)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Address delay enabled	J5	Pins 1 & 2 closed
Address delay disabled	J5	Open
NPU synchronous with CPU	JP2	Pins 1 & 2 closed
NPU asynchronous with CPU	JP2	Pins 2 & 3 closed
CMOS chip type US1287	JP3	Closed
CMOS chip type 146818	JP3	Open
Monitor type select color	JP4	Pins 2 & 3 closed
Monitor type select monochrome	JP4	Pins 1 & 2 closed
Parity enabled	JP6	Closed
Parity disabled	JP6	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	None
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	None
4MB	(2) 1M x 9	(2) 1M x 9
8MB	(2) 4M x 9	None
16MB	(2) 4M x 9	(2) 4M x 9

CPU SPEED SELECTION		
Speed	JP1	JP5
25MHz	Pins 1 & 2 closed	Pins 1 & 2 closed
33MHz	Pins 2 & 3 closed	Pins 2 & 3 closed