


TANDY/RADIO SHACK 2500 SX/33

Processor	80386SX
Processor Speed	33MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	10MB
Maximum Video Memory	1MB
Cache	None
BIOS	Unidentified
Dimensions	391mm x 384mm
I/O Options	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial port, VGA port, riser slot, headphone connector, volume control
NPU Options	80387SX

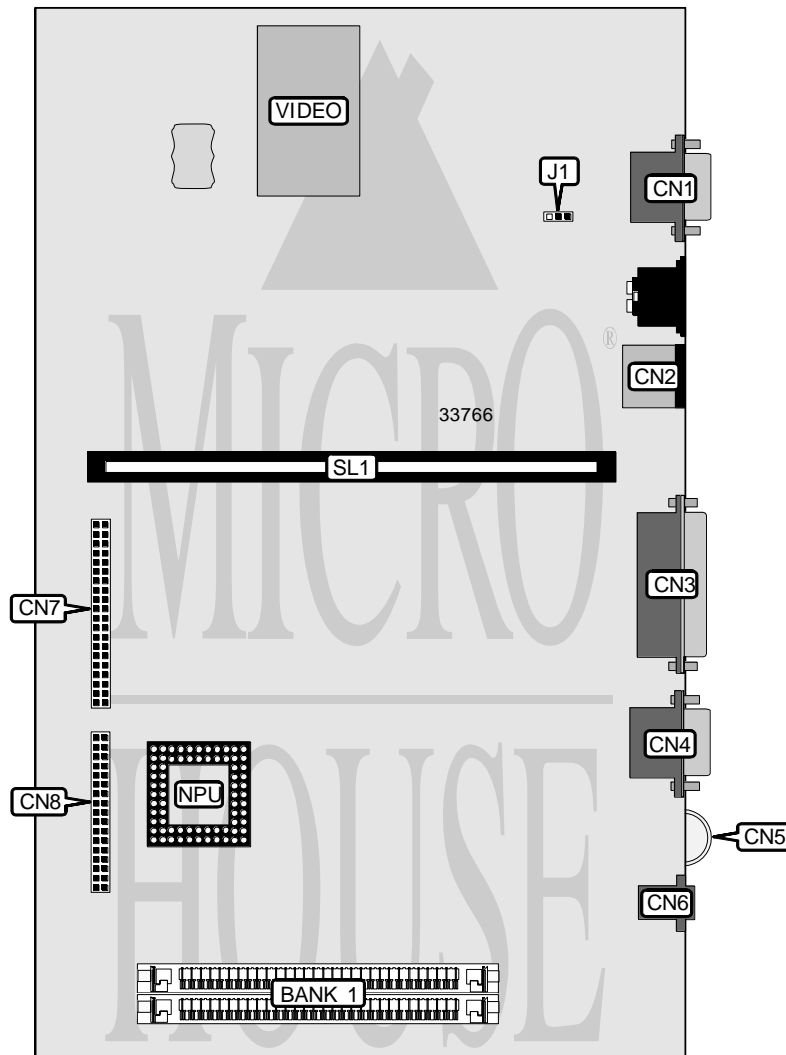

Continued on next page. . .

TANDY/RADIO SHACK

2500 SX/33

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
VGA port	CN1	Headphone connector	CN6
PS/2 mouse port	CN2	IDE interface	CN7
Parallel port	CN3	Floppy drive interface	CN8
Serial port	CN4	Riser slot	SL1
Volume control	CN5		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í On board video enabled	J1	Pins 1 & 2 closed
On board video disabled	J1	Pins 2 & 3 closed

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
2MB	2MB	None
4MB	2MB	(2) 1M x 9
10MB	2MB	(2) 4M x 9

Note: Bank 0 is factory installed and is not configurable. The location is unidentified.

VIDEO MEMORY CONFIGURATION
Note: Board accepts 512KB/1MB of video memory. The size of the chips are unidentified. The number of banks is unidentified.