


# UNIDENTIFIED 386SX-16 SYSTEM

<b>Processor</b>	80286/80386SX
<b>Processor Speed</b>	16MHz
<b>Chip Set</b>	Headland
<b>Video Chip Set</b>	Ahead
<b>Maximum Onboard Memory</b>	4MB
<b>Maximum Video Memory</b>	1MB
<b>Cache</b>	None
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	340mm x 300mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, serial port, VGA port
<b>NPU Options</b>	80287/80387SX

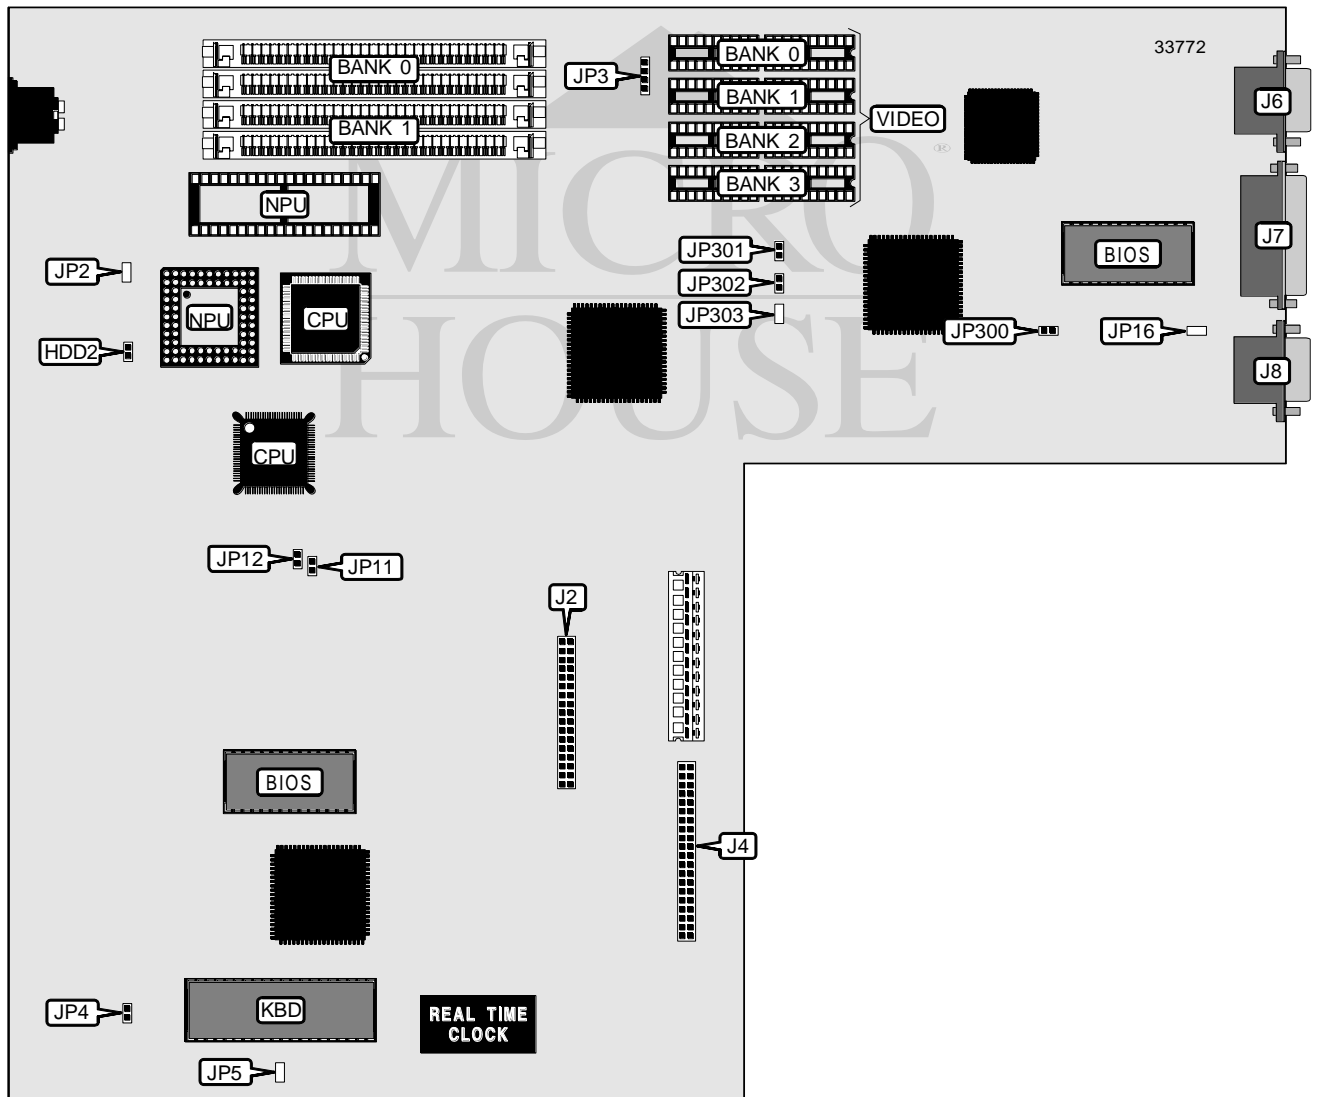

Continued on next page. . .

# UNIDENTIFIED 386SX-16 SYSTEM

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
IDE interface LED	HDD2	Parallel port	J7
Floppy drive interface	J2	VGA port	J8
IDE interface	J4	External battery	JP3
Serial port	J6	Reset switch	JP4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JP2	Unidentified
í Factory configured - do not alter	JP5	Unidentified
Parallel port enabled	JP11	Closed
Parallel port disabled	JP11	Open
Serial port enabled	JP12	Closed
Serial port disabled	JP12	Open
í Factory configured - do not alter	JP16	Unidentified
CGA emulation IRQ2 disabled	JP300	Open
CGA emulation IRQ2 enabled	JP300	Closed
í Factory configured - do not alter	JP303	Unidentified

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(2) 256K x 9	None
1MB	(2) 256K x 9	(2) 256K x 9
2MB	(2) 1M x 9	None
4MB	(2) 1M x 9	(2) 1M x 9

VIDEO MEMORY CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
256KB	(2) 44256	None	None	None
512KB	(2) 44256	(2) 44256	None	None
1MB	(2) 44256	(2) 44256	(2) 44256	(2) 44256

VIDEO MEMORY JUMPER CONFIGURATION		
Size	JP301	JP302
256KB	Open	Open
512KB	Open	Closed
1MB	Closed	Closed