


# UNIDENTIFIED P E T E R - 2 8 6 S

<b>Processor</b>	80286
<b>Processor Speed</b>	12/16MHz
<b>Chip Set</b>	Headland
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	4MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	None
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	218mm x 206mm
<b>I/O Options</b>	None
<b>NPU Options</b>	80287

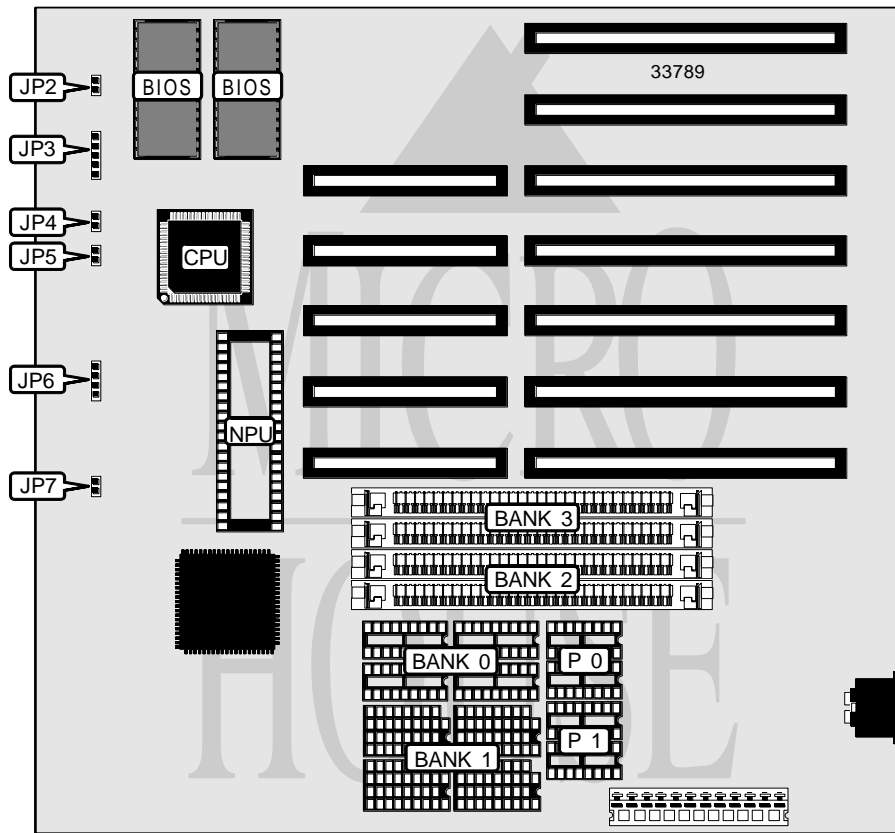

CONNECTIONS			
Purpose	Location	Purpose	Location
Turbo switch	JP2	Speaker	JP6
Power LED & keylock	JP3	Reset switch	JP7
Turbo LED	JP5		

*Continued on next page . . .*

# UNIDENTIFIED

## P E T E R - 2 8 6 S

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Monitor type select color	JP4	Closed
Monitor type select monochrome	JP4	Open

DRAM CONFIGURATION						
Size	Bank 0	P 0	Bank 1	P 1	Bank 2	Bank 3
512KB	(4) 44256	(2) 41256	None	None	None	None
640KB	(4) 44256	(2) 41256	(4) 44256	(2) 4164	None	None
1MB	(4) 44256	(2) 41256	(4) 44256	(2) 41256	None	None
2MB	None	None	None	None	(2) 1M x 9	None
4MB	None	None	None	None	(2) 1M x 9	(2) 1M x 9