


TANDY/RADIO SHACK 4820ST/T (250-5140)

Processor	80486SX/80487SX/ODP486/ODPR486/80486DX/80486DX2
Processor Speed	20/25/33/40/50(internal)/50/66(internal)MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	64MB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2)
NPU Options	80487SX

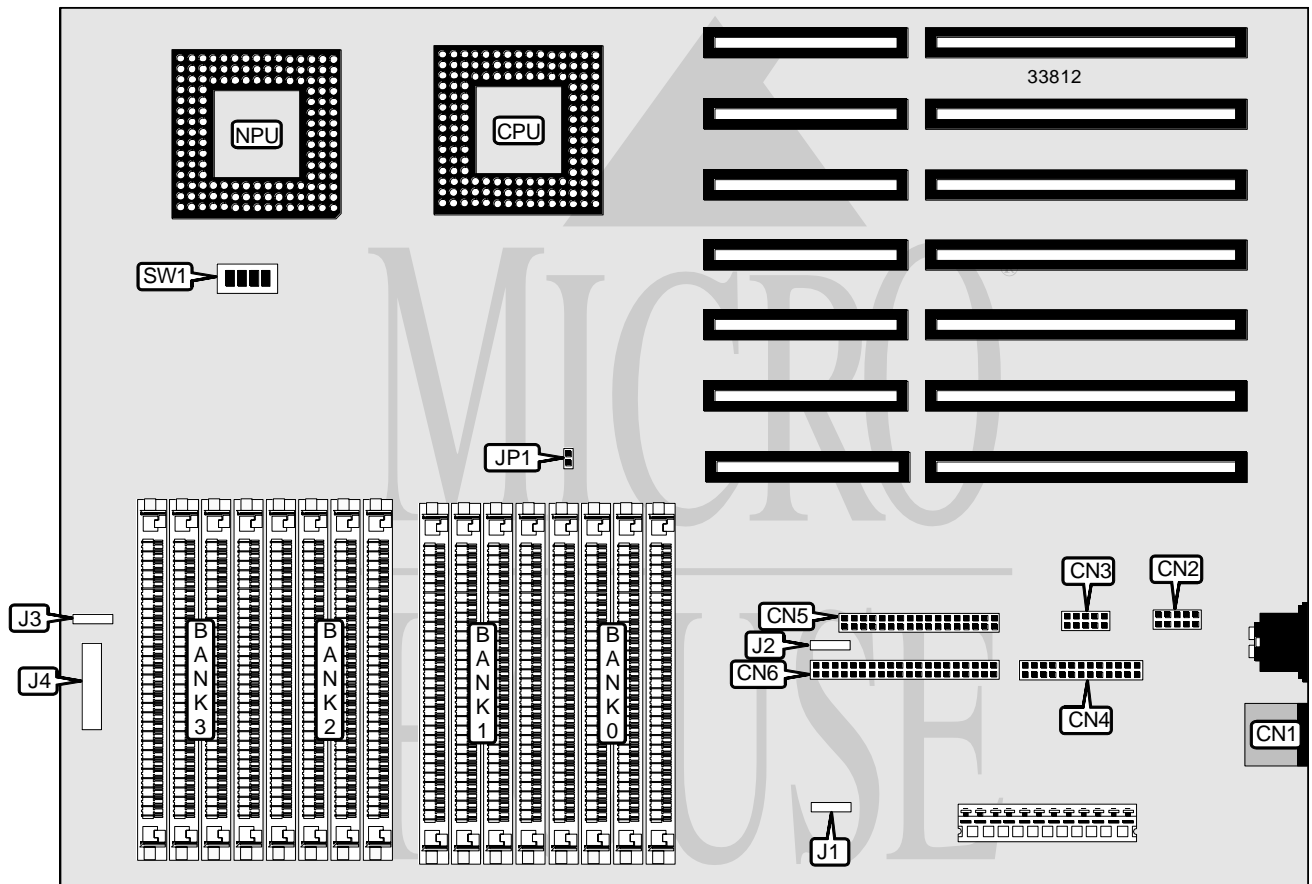

Continued on next page. . .

TANDY/RADIO SHACK

4820ST/T (250-5140)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
PS/2 mouse port	CN1	IDE interface	CN6
Serial port 1	CN2	Power indicator	J1
Serial port 2	CN3	IDE interface LED	J2
Parallel port	CN4	External battery	J3
Floppy drive interface	CN5	Front panel connector	J4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	JP1	Open
CMOS memory clear	JP1	Closed
í Monitor type select color	SW1/3	On
Monitor type select monochrome	SW1/3	Off
í Factory configured - do not alter	SW1/4	Unidentified

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
1MB	(4) 256K x 9	None	None	None
2MB	(4) 256K x 9	(4) 256K x 9	None	None
3MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	None
4MB	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9	(4) 256K x 9
4MB	(4) 1M x 9	None	None	None
5MB	(4) 256K x 9	(4) 1M x 9	None	None
6MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	None
8MB	(4) 1M x 9	(4) 1M x 9	None	None
9MB	(4) 1M x 9	(4) 1M x 9	(4) 256K x 9	None
10MB	(4) 256K x 9	(4) 256K x 9	(4) 1M x 9	(4) 1M x 9
12MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	None
16MB	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9	(4) 1M x 9
16MB	(4) 4M x 9	None	None	None
17MB	(4) 256K x 9	(4) 4M x 9	None	None
18MB	(4) 256K x 9	(4) 256K x 9	(4) 4M x 9	None
20MB	(4) 1M x 9	(4) 4M x 9	None	None
24MB	(4) 1M x 9	(4) 1M x 9	(4) 4M x 9	None
32MB	(4) 4M x 9	(4) 4M x 9	None	None
33MB	(4) 4M x 9	(4) 4M x 9	(4) 256K x 9	None
34MB	(4) 256K x 9	(4) 256K x 9	(4) 4M x 9	(4) 4M x 9
36MB	(4) 4M x 9	(4) 4M x 9	(4) 1M x 9	None
40MB	(4) 1M x 9	(4) 1M x 9	(4) 4M x 9	(4) 4M x 9
48MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	None
64MB	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9	(4) 4M x 9

Continued on next page. . .

TANDY/RADIO SHACK
4820ST/T (250-5140)*... continued from previous page*

CPU TYPE SELECTION			
Type	Socket	SW1/1	SW1/2
80486SX	CPU	Off	Off
ODP486	CPU	On	On
ODP486	NPU	Off	Off
ODPR486	CPU	On	Off
80487SX	CPU	On	On
80487SX	NPU	Off	Off
80486DX	CPU	On	Off
80486DX2	CPU	On	Off