


AMDEK CORPORATION SYSTEM/286 SERIES

Processor	80286
Processor Speed	8/10/12MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	1MB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	Unidentified
I/O Options	None
NPU Options	80287

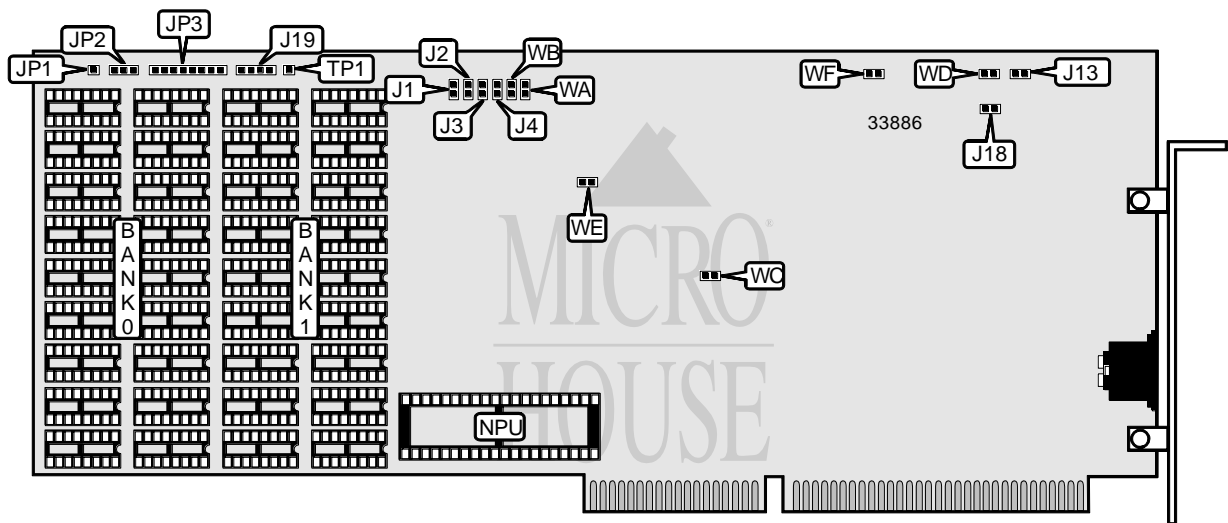

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	J19	Speaker	JP2
Power good connector	JP1	Reset switch	TP1

Continued on next page. . .

AMDEK CORPORATION SYSTEM/286 SERIES

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J1	Open
í Factory configured - do not alter	J2	Closed
í Factory configured - do not alter	J3	Closed
í Factory configured - do not alter	J4	Closed
í Factory configured - do not alter	J13	Open
í Parity enabled	J18	Open
Parity disabled	J18	Closed
í Factory configured - do not alter	JP3	Unidentified
í Monitor type select color	WD	Closed
Monitor type select monochrome	WD	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
512KB	(18) 41256	None
1MB	(18) 41256	(18) 41256

DRAM JUMPER CONFIGURATION			
Memory onboard	Starting address	WA	WB
512KB	512KB/1MB	Closed	Closed
1MB	512KB	Closed	Closed
1MB	1MB	Open	Closed
1MB	1.375MB	Open	Open
1MB	1.5MB	Closed	Open

NPU SPEED SELECTION			
Speed	WC	WE	WF
6MHz	Closed	Open	Closed
10MHz	Open	Closed	Open