


MICRO-STAR INTERNATIONAL CO., LTD.  
 MS - 6 1 1 1

<b>Processor</b>	Pentium II
<b>Processor Speed</b>	200/233/266/300/333MHz
<b>Chip Set</b>	Intel
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	1GB (EDO supported)
<b>Maximum Video Memory</b>	None
<b>Cache</b>	256/512KB (located on Pentium II CPU)
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	300mm x 230mm
<b>I/O Options</b>	32-bit PCI slots (4), floppy drive interface, IDE interfaces (2), PS/2 mouse port, serial ports (2), parallel port, IR connector, USB connector, ATX power connector, AGP slot
<b>NPU Options</b>	None

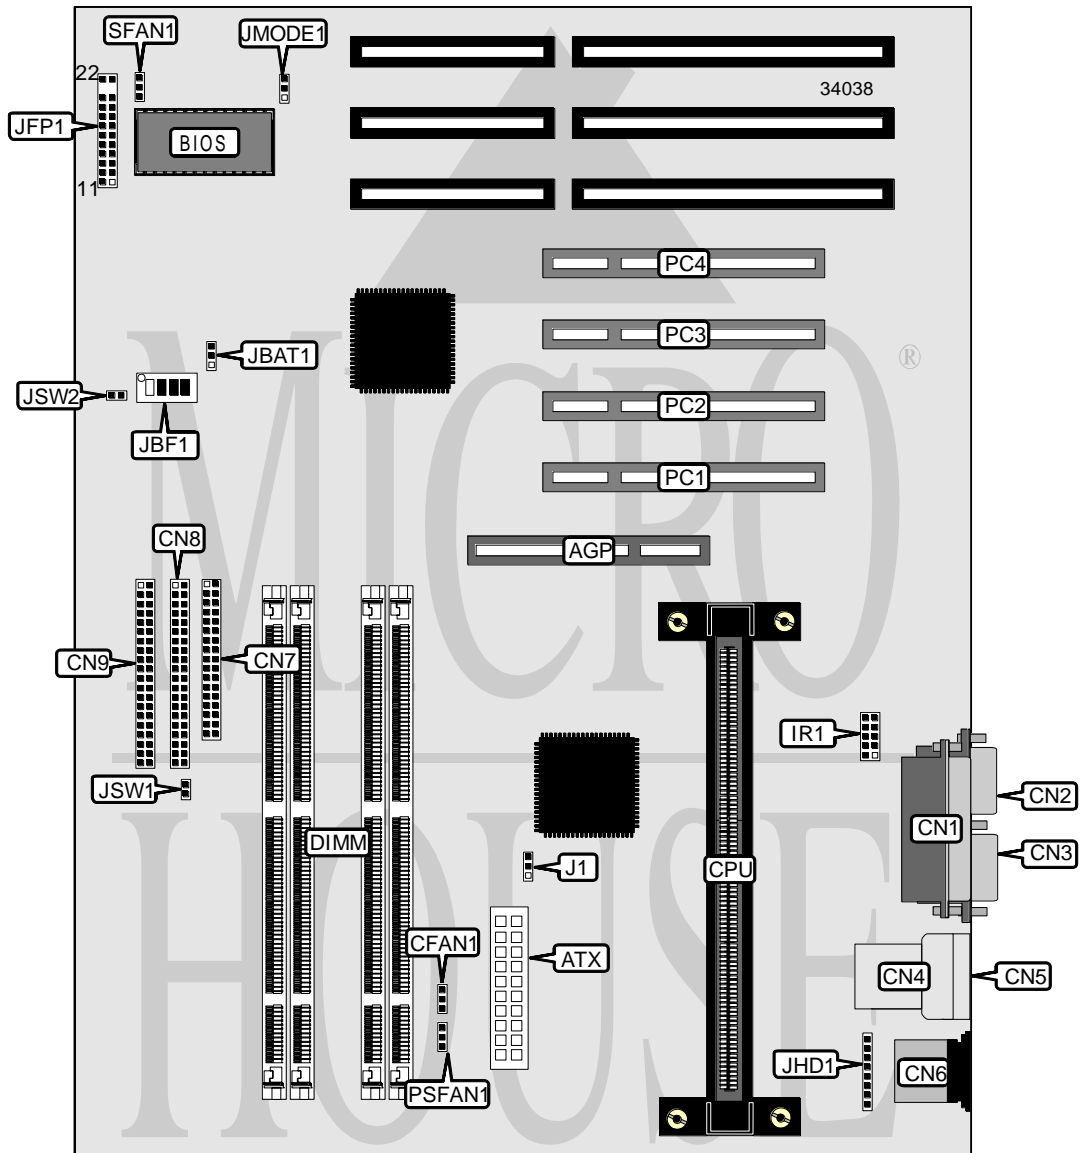

Continued on next page . . .

MICRO-STAR INTERNATIONAL CO., LTD.  
MS - 6 1 1 1

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
AGP slot	AGP	IR connector	IR1
ATX power connector	ATX	Power LED & keylock	JFP1/pins 1 - 5
Parallel port	CN1	Speaker	JFP1/pins 7 - 10
Serial port 1	CN2	Turbo LED	JFP1/pins 12 & 13
Serial port 2	CN3	Reset switch	JFP1/pins 19 & 20
USB connector 1	CN4	IDE interface LED	JFP1/pins 21 & 22
USB connector 2	CN5	Soft off power supply	JSW1
PS/2 mouse port	CN6	Soft off power supply	JSW2
Floppy drive interface	CN7	32-bit PCI slots	PC1 – PC4
IDE interface 2	CN8	Power supply fan	PSFAN1
IDE interface 1	CN9	Chassis fan power	SFAN1
CPU fan	CFAN1		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J1	Unidentified
í CMOS memory normal operation	JBAT1	Pins 1 & 2 closed
CMOS memory clear	JBAT1	Pins 2 & 3 closed
í Factory configured - do not alter	JHD1	Unidentified
í Flash BIOS voltage select 5v	JMODE1	Pins 2 & 3 closed
Flash BIOS voltage select 12v	JMODE1	Pins 1 & 2 closed

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(1) 1M x 64	None	None	None
16MB	(1) 2M x 64	None	None	None
16MB	(1) 1M x 64	(1) 1M x 64	None	None
24MB	(1) 2M x 64	(1) 1M x 64	None	None
24MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	None
32MB	(1) 4M x 64	None	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64	(1) 1M x 64
40MB	(1) 4M x 64	(1) 1M x 64	None	None
48MB	(1) 4M x 64	(1) 2M x 64	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 8M x 64	None	None	None
64MB	(1) 4M x 64	(1) 4M x 64	None	None
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
72MB	(1) 8M x 64	(1) 1M x 64	None	None
80MB	(1) 8M x 64	(1) 2M x 64	None	None
96MB	(1) 8M x 64	(1) 4M x 64	None	None

Continued on next page. . .

MICRO-STAR INTERNATIONAL CO., LTD.  
MS - 6 1 1 1

... continued from previous page

DIMM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 16M x 64	None	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None	None
256MB	(1) 32M x 64	None	None	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64
512MB	(1) 32M x 64	(1) 32M x 64	None	None
768MB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	None
1GB	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64	(1) 32M x 64

Note: If SDRAM are used the maximum memory is 512MB. If EDO is used the maximum memory is 1GB.

CACHE CONFIGURATION
Note: 256KB/512KB cache is located on the Pentium II CPU.

CPU SPEED SELECTION				
Speed	JBF1/1	JBF1/2	JBF1/3	JBF1/4
200MHz	On	Off	On	On
233MHz	On	Off	Off	On
266MHz	Off	On	On	On
300MHz	Off	On	Off	On
333MHz	Off	Off	On	On