


ANTEC, INC.

M B 5 6 8 5

Processor	CX M1/IBM/AM K5/AM K6/Pentium
Processor Speed	75/90/100/120/125/133/150/166/200/233MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	256MB (EDO supported)
Maximum Video Memory	None
Cache	256/512KB
BIOS	Award
Dimensions	220mm x 220mm
I/O Options	32-bit PCI slots (4), floppy drive interface, green PC connector, IDE interfaces (2), parallel port, PS/2 mouse interface, serial ports (2), IR connector, USB connectors (2)
NPU Options	None

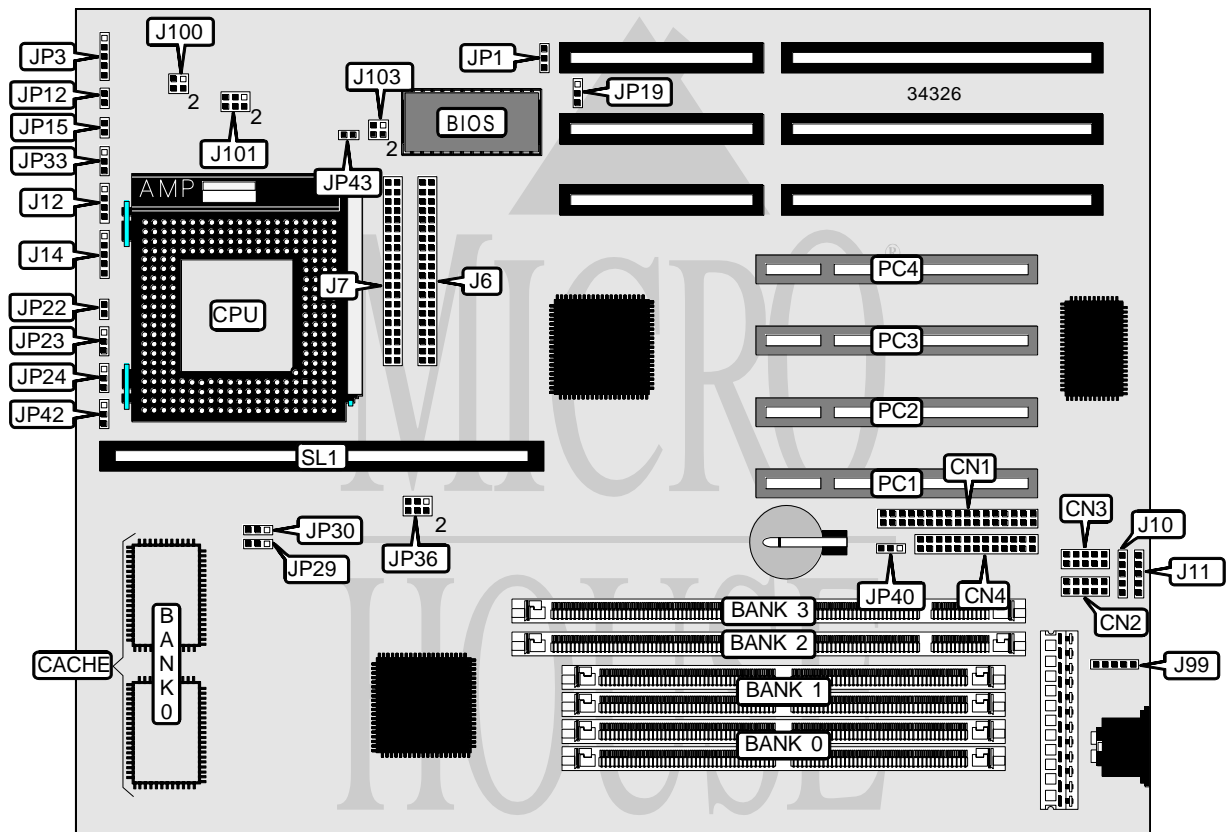

Continued on next page . . .

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
Floppy drive interface	CN1	PS/2 mouse interface	J99
Serial port 1	CN2	Chassis fan power	JP1
Serial port 2	CN3	IR connector	JP3
Parallel port	CN4	Reset switch	JP12
IDE interface 1	J6	Green PC connector	JP15
IDE interface 2	J7	IDE interface LED	JP22
USB connector	J10	Green PC LED	JP33
USB connector	J11	32-bit PCI slots	PC1 – PC4
Speaker	J12	Cache slot	SL1
Power LED & keylock	J14		

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Flash BIOS voltage select 12v	JP19	Pins 1 & 2 closed
Flash BIOS voltage select 5v	JP19	Pins 2 & 3 closed
í CMOS memory normal operation	JP40	Pins 2 & 3 closed
CMOS memory clear	JP40	Pins 1 & 2 closed
í Factory configured - do not alter	JP42	Unidentified

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 1M x 36	(2) 2M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 2M x 36	(2) 4M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 1M x 36	(2) 8M x 36
80MB	(2) 2M x 36	(2) 8M x 36
96MB	(2) 4M x 36	(2) 8M x 36
128MB	(2) 8M x 36	(2) 8M x 36
128MB	(2) 16M x 36	None
136MB	(2) 1M x 36	(2) 16M x 36
144MB	(2) 2M x 36	(2) 16M x 36
160MB	(2) 4M x 36	(2) 16M x 36
192MB	(2) 8M x 36	(2) 16M x 36
256MB	(2) 16M x 36	(2) 16M x 36

Note: Board accepts EDO memory. Do not install SIMMs & DIMMs at the same time.

Continued on next page...

ANTEC, INC.
MB5685

... continued from previous page

DIMM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(1) 1M x 64	None
16MB	(1) 2M x 64	None
16MB	(1) 1M x 64	(1) 1M x 64
24MB	(1) 1M x 64	(1) 2M x 64
32MB	(1) 4M x 64	None
32MB	(1) 2M x 64	(1) 2M x 64
40MB	(1) 1M x 64	(1) 4M x 64
48MB	(1) 4M x 64	(1) 2M x 64
64MB	(1) 8M x 64	None
64MB	(1) 4M x 64	(1) 4M x 64
72MB	(1) 1M x 64	(1) 8M x 64
80MB	(1) 2M x 64	(1) 8M x 64
96MB	(1) 4M x 64	(1) 8M x 64
128MB	(1) 8M x 64	(1) 8M x 64
128MB	(1) 16M x 64	None
136MB	(1) 1M x 64	(1) 16M x 64
144MB	(1) 2M x 64	(1) 16M x 64
160MB	(1) 4M x 64	(1) 16M x 64
192MB	(1) 8M x 64	(1) 16M x 64
256MB	(1) 16M x 64	(1) 16M x 64

CACHE CONFIGURATION		
Size	Bank 0	SL1
256KB	(2) 32K x 32	Not installed
512KB	(2) 32K x 32	256KB module installed

CACHE JUMPER CONFIGURATION		
Size	JP29	JP30
256KB	Pins 1 & 2 closed	Pins 2 & 3 closed
512KB	Pins 2 & 3 closed	Pins 1 & 2 closed

CPU SPEED SELECTION (CYRIX)					
CPU speed	Clock speed	Multiplier	JP23	JP24	JP36
120MHz	50MHz	2x	1 & 2	2 & 3	1 & 2, 3 & 4, 5 & 6
133MHz	55MHz	2x	1 & 2	2 & 3	1 & 2, 5 & 6
150MHz	60MHz	2x	1 & 2	2 & 3	1 & 2, 3 & 4
166MHz	66MHz	2x	1 & 2	2 & 3	3 & 4, 5 & 6

Note: Pins designated should be in the closed position.

Continued on next page. . .

... continued from previous page

CPU SPEED SELECTION (IBM)					
CPU speed	Clock speed	Multiplier	JP23	JP24	JP36
120MHz	50MHz	2x	1 & 2	2 & 3	1 & 2, 3 & 4, 5 & 6
133MHz	55MHz	2x	1 & 2	2 & 3	1 & 2, 5 & 6
150MHz	60MHz	2x	1 & 2	2 & 3	1 & 2, 3 & 4
166MHz	66MHz	2x	1 & 2	2 & 3	3 & 4, 5 & 6

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (AMD)					
CPU speed	Clock speed	Multiplier	JP23	JP24	JP36
75MHz	50MHz	1.5x	2 & 3	2 & 3	1 & 2, 3 & 4, 5 & 6
90MHz	60MHz	1.5x	2 & 3	2 & 3	1 & 2, 3 & 4
100MHz	66MHz	1.5x	2 & 3	2 & 3	3 & 4, 5 & 6
120MHz	60MHz	1.5x	2 & 3	2 & 3	1 & 2, 3 & 4
133MHz	66MHz	1.5x	2 & 3	2 & 3	3 & 4, 5 & 6
150MHz	60MHz	1.75x	1 & 2	1 & 2	1 & 2, 3 & 4
166MHz	66MHz	1.75x	1 & 2	1 & 2	3 & 4, 5 & 6
166MHz	66MHz	2.5x	1 & 2	1 & 2	3 & 4, 5 & 6
200MHz	66MHz	3x	2 & 3	1 & 2	3 & 4, 5 & 6
233MHz	66MHz	3.5x	2 & 3	2 & 3	3 & 4, 5 & 6

Note: Pins designated should be in the closed position.

CPU SPEED SELECTION (INTEL)					
CPU speed	Clock speed	Multiplier	JP23	JP24	JP36
75MHz	50MHz	1.5x	2 & 3	2 & 3	1 & 2, 3 & 4, 5 & 6
90MHz	60MHz	1.5x	2 & 3	2 & 3	1 & 2, 3 & 4
100MHz	66MHz	1.5x	2 & 3	2 & 3	3 & 4, 5 & 6
120MHz	60MHz	2x	1 & 2	2 & 3	1 & 2, 3 & 4
125MHz	50MHz	2.5x	1 & 2	1 & 2	1 & 2, 3 & 4, 5 & 6
133MHz	66MHz	2x	1 & 2	2 & 3	3 & 4, 5 & 6
150MHz	60MHz	2.5x	1 & 2	1 & 2	1 & 2, 3 & 4
166MHz	66MHz	2.5x	1 & 2	1 & 2	3 & 4, 5 & 6
200MHz	66MHz	3x	2 & 3	1 & 2	3 & 4, 5 & 6
233MHz	66MHz	3.5x	2 & 3	2 & 3	3 & 4, 5 & 6

Note: Pins designated should be in the closed position.

CPU VOLTAGE SELECTION (SINGLE)			
Voltage	J100	J101	J103
3.34v	3 & 4	1 & 3, 2 & 4	1 & 3
3.58v	3 & 4	1 & 3, 2 & 4	1 & 3, 2 & 4

Note: Pins designated should be in the closed position.

Continued on next page...

... continued from previous page

CPU VOLTAGE SELECTION (DUAL)				
Voltage	V core	J100	J101	J103
3.3v	2.86v	3 & 4	3 & 5, 4 & 6	Open
3.3v	2.97	3 & 4	3 & 5, 4 & 6	2 & 4
3.3v	3.15	3 & 4	3 & 5, 4 & 6	3 & 4

Note: Pins designated should be in the closed position.

VOLTAGE FINE TUNE SELECTION	
Setting	JP43
V core normal voltage	Closed
V core voltage increase by 2.5%	Open