


# COMPAQ COMPUTER CORPORATION

## DESKPRO 2000 (PENTIUM PRO)

<b>Processor</b>	Pentium Pro
<b>Processor Speed</b>	180/200MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	Matrox
<b>Maximum Onboard Memory</b>	192MB (EDO supported)
<b>Maximum Video Memory</b>	2MB
<b>Cache</b>	256KB (located on Pentium Pro CPU)
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	254mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), VGA port, riser slot
<b>NPU Options</b>	None

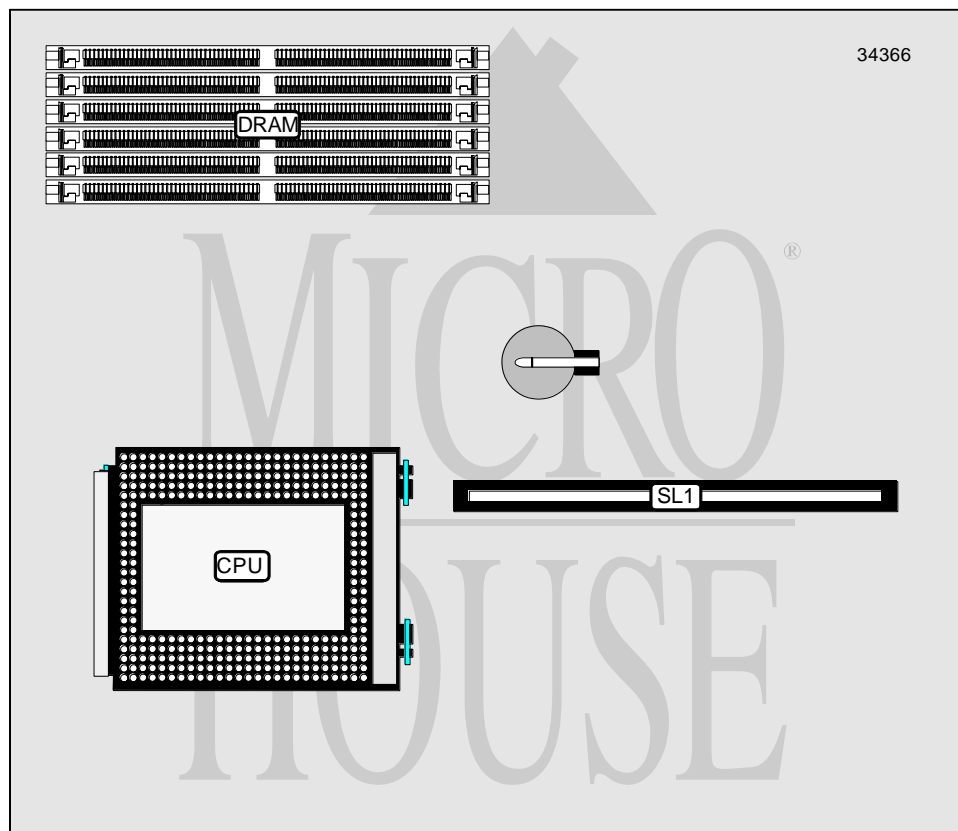

THE LOCATION OF ALL JUMPERS AND I/O CONNECTORS ARE UNIDENTIFIED

CONNECTIONS			
Purpose	Location	Purpose	Location
External battery	E9	Riser slot	SL1

Continued on next page. . .

COMPAQ COMPUTER CORPORATION  
 DESKPRO 2000 (PENTIUM PRO)

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
Password enabled	E6	Pins 5 & 6 closed
Password disabled	E6	Pins 6 & 7 closed
í CMOS memory normal operation	E8	Open
CMOS memory clear	E8	Closed

DRAM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
16MB	(2) 2M x 36	None	None
32MB	(2) 4M x 36	None	None
32MB	(2) 2M x 36	(2) 2M x 36	None
48MB	(2) 4M x 36	(2) 2M x 36	None
64MB	(2) 8M x 36	None	None
64MB	(2) 4M x 36	(2) 4M x 36	None
80MB	(2) 8M x 36	(2) 2M x 36	None
96MB	(2) 8M x 36	(2) 4M x 36	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
96MB	(2) 8M x 36	(2) 2M x 36	(2) 2M x 36
128MB	(2) 16M x 36	None	None
128MB	(2) 8M x 36	(2) 8M x 36	None
144MB	(2) 16M x 36	(2) 2M x 36	None
160MB	(2) 16M x 36	(2) 4M x 36	None
160MB	(2) 16M x 36	(2) 2M x 36	(2) 2M x 36
176MB	(2) 16M x 36	(2) 4M x 36	(2) 2M x 36
192MB	(2) 16M x 36	(2) 8M x 36	None
192MB	(2) 16M x 36	(2) 4M x 36	(2) 4M x 36

Note: The location of banks 0, 1 & 2 are unidentified. Board accepts EDO memory.

CACHE CONFIGURATION
Note: 256KB cache is located on the Pentium Pro CPU.

VIDEO MEMORY CONFIGURATION
Note: The location of the video memory is unidentified.

CPU SPEED SELECTION					
CPU speed	Clock speed	Multiplier	S1/1	S1/2	S1/3
180MHz	66MHz	3x	On	Off	On
200MHz	66MHz	3x	Off	On	On

CPU SPEED SELECTION (CON'T)					
CPU speed	Clock speed	Multiplier	S1/4	S1/5	S1/6
180MHz	66MHz	3x	On	Off	On
200MHz	66MHz	3x	On	Off	On