


ZENITH DATA SYSTEMS

Z - 2 8 6

Processor	80286
Processor Speed	8MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	3.15MB
Maximum Video Memory	None
Cache	None
BIOS	Unidentified
Dimensions	Unidentified
I/O Options	CPU slot, Zenith expansion slots (2)
NPU Options	80287

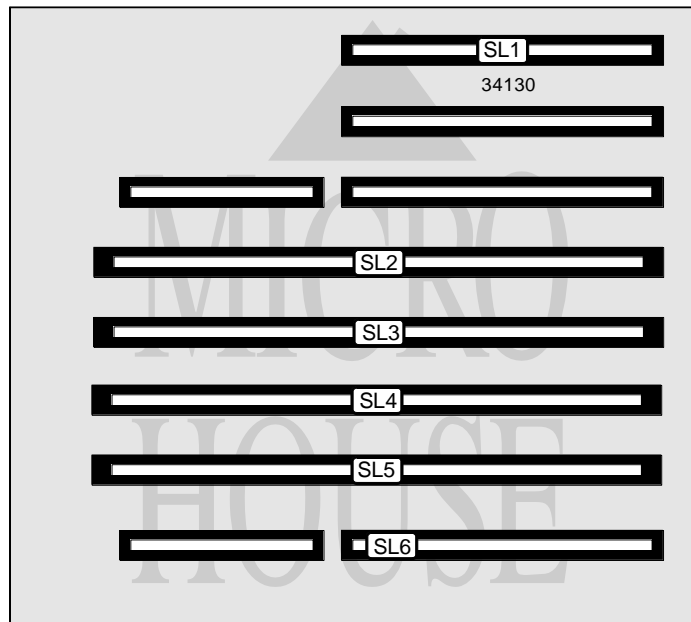

CONNECTIONS			
Purpose	Location	Purpose	Location
Video slot	SL1	CPU slot	SL4
Zenith expansion slot	SL2	I/O slot	SL5
00Zenith expansion slot	SL3	Floppy slot	SL6

Continued on next page. . .


ZENITH DATA SYSTEMS

Z - 2 8 6

... continued from previous page

DRAM CONFIGURATION

Note: The location of the memory is unidentified.

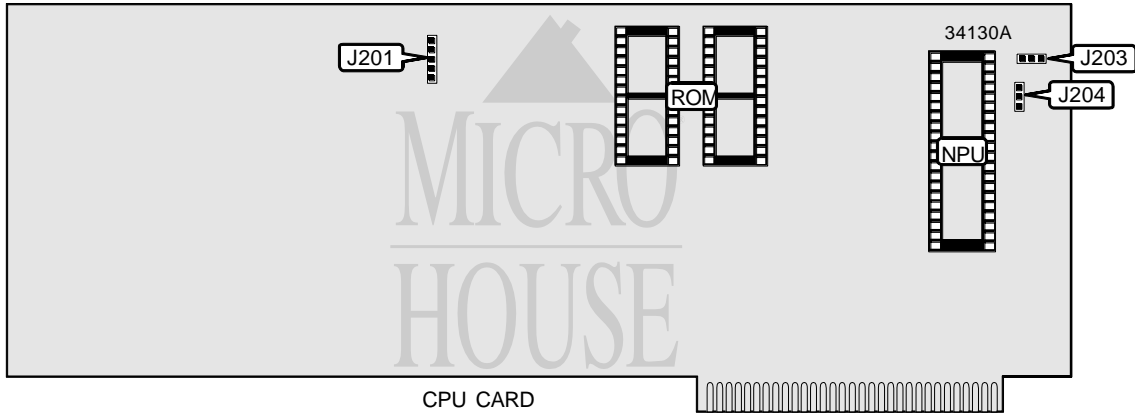

USER CONFIGURABLE SETTINGS

Function	Label	Position
Expansion ROM select 16KB	J201	Pins 2 & 3, 4 & 5 closed
Expansion ROM select 32KB	J201	Pins 1 & 2, 3 & 4 closed

NPU SPEED SELECTION

Speed	J203	J204
6MHz	Pins 1 & 2 closed	Pins 1 & 2 closed
8MHz	Open	Pins 2 & 3 closed