


DELL COMPUTER CORPORATION OPTIPLEX GX PRO

Processor	Pentium Pro
Processor Speed	180/200MHz
Chip Set	Intel
Video Chip Set	None
Maximum Onboard Memory	512MB
Maximum Video Memory	None
Cache	256/512KB (located on Pentium Pro CPU)
BIOS	Unidentified
Dimensions	305mm x 244mm
I/O Options	Ethernet 10BaseT connector, floppy drive interface, IDE interfaces (2), parallel port, PS/2 mouse port, serial ports (2), riser slot, CPU slot, USB connector, ATX power connector, line in, speaker out, microphone in, audio in-CD-ROM
NPU Options	None

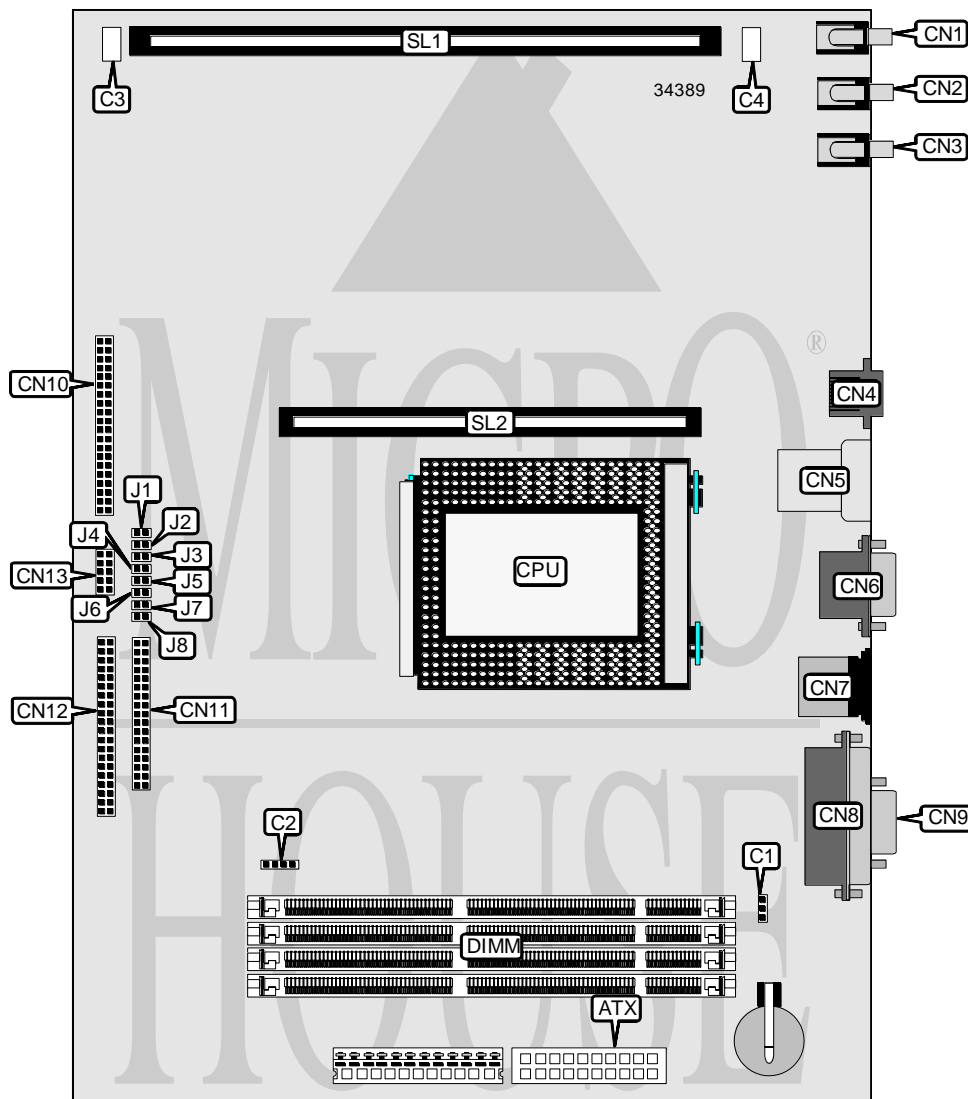

Continued on next page. . .

DELL COMPUTER CORPORATION

OPTIPLEX GX PRO

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
ATX power connector	ATX	Serial port 2	CN6
Chassis fan power	C1	PS/2 mouse port	CN7
Audio in-CD-ROM	C2	Parallel port	CN8
Riser board power connector	C3	Serial port 1	CN9
Riser board power connector	C4	IDE interface 1	CN10
Line in	CN1	Floppy drive interface	CN11
Speaker out	CN2	IDE interface 2	CN12
Microphone in	CN3	Front panel connector	CN13
Ethernet 10BaseT connector	CN4	Riser slot	SL1
USB connector	CN5	CPU slot	SL2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J3	Open
í Factory configured - do not alter	J4	Open
í Factory configured - do not alter	J5	Open
í Factory configured - do not alter	J6	Open
í Factory configured - do not alter	J7	Open
í Password enabled	J8	Closed
Password disabled	J8	Open

DIMM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
16MB	(1) 2M x 64	None	None	None
32MB	(1) 2M x 64	(1) 2M x 64	None	None
32MB	(1) 4M x 64	None	None	None
48MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	None
64MB	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64	(1) 2M x 64
64MB	(1) 4M x 64	(1) 4M x 64	None	None
64MB	(1) 8M x 64	None	None	None
96MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	None
128MB	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64	(1) 4M x 64
128MB	(1) 8M x 64	(1) 8M x 64	None	None
128MB	(1) 16M x 64	None	None	None
192MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	None
256MB	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64	(1) 8M x 64
256MB	(1) 16M x 64	(1) 16M x 64	None	None
384MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	None
512MB	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64	(1) 16M x 64

Note: The location of the banks is unidentified. Board accepts EDO memory.

Continued on next page. . .

DELL COMPUTER CORPORATION
OPTIPLEX GX PRO

... continued from previous page

CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium Pro CPU.

CPU SPEED SELECTION

CPU speed	Clock speed	Multiplier	J1	J2
180MHz	60MHz	3x	Closed	Open
200MHz	66MHz	3x	Open	Closed