


AMPRO COMPUTERS, INC. CORE MODULE /PC

Processor	8088
Processor Speed	10MHz
Chip Set	Unidentified
Video Chip Set	None
Maximum Onboard Memory	1MB
Maximum Video Memory	None
Cache	None
BIOS	Award
Dimensions	96mm x 90mm
I/O Options	Parallel port, serial ports (2), PC/104 connector
NPU Options	None

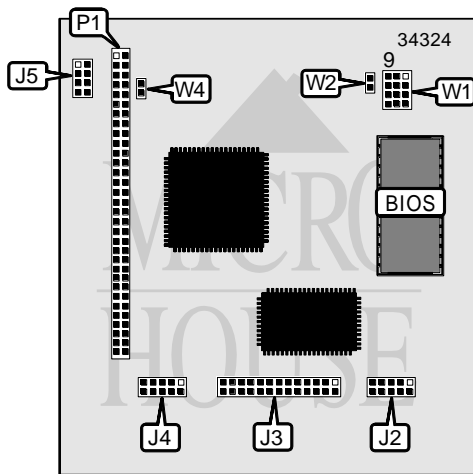

CONNECTIONS			
Purpose	Location	Purpose	Location
Serial port	J2	DC power	J5
Parallel port	J3	PC/104 connector	P1
Serial port	J4		

Continued on next page. . .

AMPRO COMPUTERS, INC.
CORE MODULE /PC

... continued from previous page

USER CONFIGURABLE SETTINGS

Function	Label	Position
í Factory configured - do not alter	W4	Unidentified

DRAM CONFIGURATION

Note: 256KB/1MB memory is factory installed and is not configurable. The location is unidentified.

BIOS SELECTION (EPROM)

Type	W1	W2
27C64	6 & 7, 8 & 12	Open
27C128	6 & 7, 8 & 12	Open
27C256	6 & 10, 7 & 11, 8 & 12	Open
27C512	9 & 10, 7 & 11, 8 & 12	Open
27C010	2 & 3, 5 & 6, 7 & 11, 9 & 10	Open
27C020	2 & 3, 4 & 8, 5 & 6, 7 & 11, 9 & 10	Open
27C040	1 & 5, 2 & 3, 4 & 8, 7 & 11, 9 & 10	Open
27C080	1 & 5, 4 & 8, 7 & 11, 9 & 10	Closed
27F010	2 & 3, 5 & 6, 7 & 11, 9 & 10	Open
28C64	6 & 7, 8 & 12	Open
28C256	6 & 7, 8 & 12, 10 & 11	Open
28F010	2 & 3, 5 & 6, 7 & 11, 9 & 10	Open
28F512	2 & 3, 5 & 6, 7 & 11, 9 & 10	Open
28F020	2 & 3, 4 & 8, 5 & 6, 7 & 11, 9 & 10	Open
29C256	6 & 10, 7 & 11, 8 & 12	Open
48F010	2 & 3, 5 & 6, 7 & 11, 9 & 10	Open
48F512	2 & 3, 5 & 6, 7 & 11, 9 & 10	Open
58F1000	2 & 3, 5 & 6, 7 & 11, 9 & 10	Open

Note: Pins designated should be in the closed position.

BIOS SELECTION (NOVRAM)

Type	W1	W2
BQ4011Y	6 & 7, 8 & 12, 10 & 11	Open
DS1217	6 & 7, 8 & 12, 10 & 11	Open
DS1235Y	6 & 7, 8 & 12, 10 & 11	Open
BQ4015Y	1 & 2, 4 & 8, 5 & 9, 6 & 7, 10 & 12	Open
BQ4013Y	5 & 9, 6 & 7, 8 & 12, 10 & 11	Open
DS1245Y	5 & 9, 6 & 7, 8 & 12, 10 & 11	Open

Note: Pins designated should be in the closed position.