


TEXAS MICROSYSTEMS, INC.  
D560C

<b>Processor</b>	Pentium
<b>Processor Speed</b>	60MHz
<b>Chip Set</b>	Intel
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	128MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	256KB
<b>BIOS</b>	Phoenix
<b>Dimensions</b>	337mm x 122mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, SCSI interface, parallel port, PS/2 mouse interface, serial ports (2), PCI video module connector
<b>NPU Options</b>	None

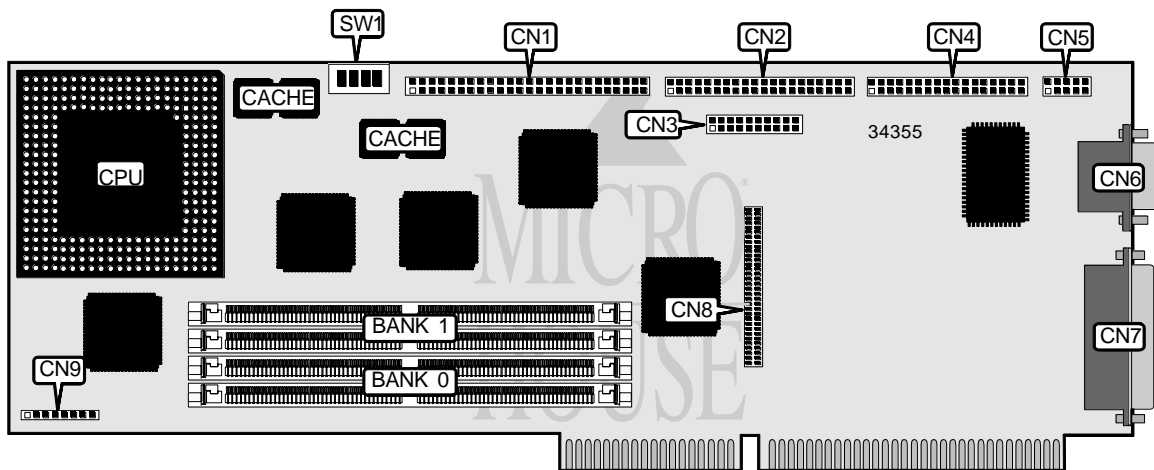

NOTE: THE LOCATION OF ALL JUMPERS ARE UNIDENTIFIED.

CONNECTIONS			
Purpose	Location	Purpose	Location
SCSI interface	CN1	Serial port 1	CN6
IDE interface	CN2	Parallel port	CN7
PS/2 mouse & keyboard interface	CN3	PCI video module connector	CN8
Floppy drive interface	CN4	AT keyboard connector	CN9
Serial port 2	CN5	Hard drive LED	JP5

Continued on next page. . .

TEXAS MICROSYSTEMS, INC.  
D560C

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	JP1	Unidentified
í Factory configured - do not alter	JP2	Unidentified
í Watchdog timer disabled	JP6	Pins 2 & 3 closed
Watchdog timer enabled	JP6	Pins 1 & 2 closed
í Pipeline mode enabled	JP7	Closed
Pipeline mode disabled	JP7	Open
í Cache type select write back	JP8	Open
Cache type select write through	JP8	Closed
í SCSI speed select 33MHz	JP11	Pins 2 & 3 closed
SCSI speed select 40MHz	JP11	Pins 1 & 2 closed
í PS/2 IRQ12 enabled	JP12	Pins 1 & 2 closed
Next Step OS used	JP12	Pins 2 & 3 closed
í Monitor type select color	SW1/1	On
Monitor type select monochrome	SW1/1	Off
í Flash BIOS enabled	SW1/2	Off
Flash BIOS disabled	SW1/2	On
í CMOS memory normal operation	SW1/3	Off
CMOS memory clear	SW1/3	On
í Factory configured - do not alter	SW1/4	Unidentified

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

Note: Board also accepts x 32 SIMMs.

CACHE CONFIGURATION
Note: 256KB cache is factory installed and is not configurable.

CACHE JUMPER CONFIGURATION				
Size	JP3	JP4	JP9	JP10
256KB	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed