


TEXAS MICROSYSTEMS, INC.  
P560C

<b>Processor</b>	Pentium
<b>Processor Speed</b>	60MHz
<b>Chip Set</b>	Intel
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	128MB
<b>Maximum Video Memory</b>	None
<b>Cache</b>	256KB
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	337mm x 122mm
<b>I/O Options</b>	AUI connector, floppy drive interface, IDE interface, SCSI interface, parallel port, PS/2 mouse port, serial ports (2)
<b>NPU Options</b>	None

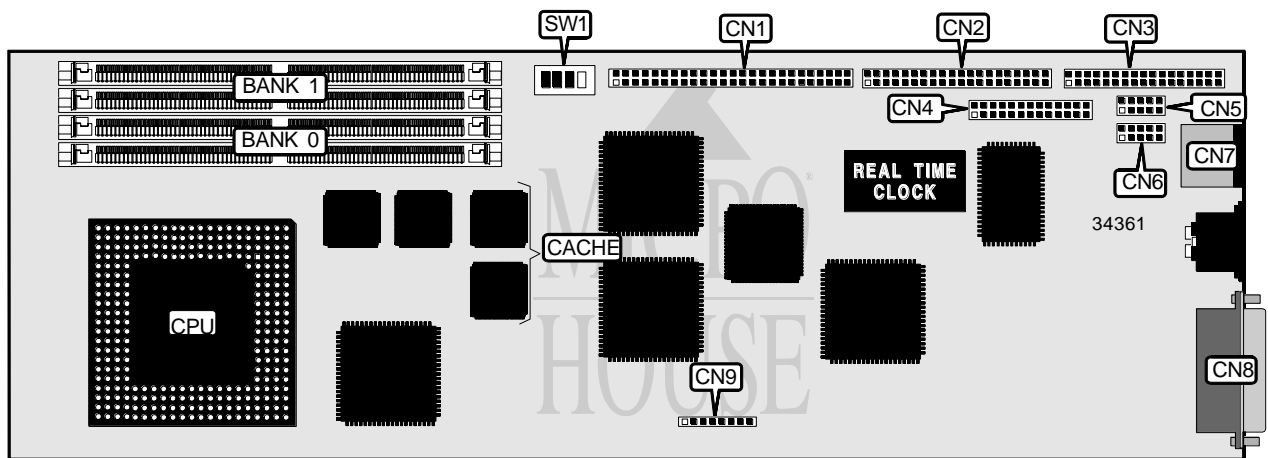

NOTE: THE LOCATION OF ALL JUMPERS ARE UNIDENTIFIED.

CONNECTIONS			
Purpose	Location	Purpose	Location
SCSI interface	CN1	PS/2 mouse port	CN7
IDE interface	CN2	AUI connector	CN8
Floppy drive interface	CN3	AT keyboard connector	CN9
Parallel port	CN4	AUI active link LED	JP3
Serial port 2	CN5	AUI receive LED	JP4
Serial port 1	CN6	Hard drive LED	JP5

Continued on next page. . .

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Cache type select write back	JP8	Open
Cache type select write through	JP8	Closed
í PS/2 IRQ 12 enabled	JP9	Pins 2 & 3 closed
Next Step OS used	JP9	Pins 1 & 2 closed
í SCSI speed select 33MHz	JP10	Pins 2 & 3 closed
SCSI speed select 40MHz	JP10	Pins 1 & 2 closed
í Pipeline mode enabled	JP11	Closed
Pipeline mode disabled	JP11	Open
í Watchdog timer uses 1.8MHz strobe	JP12	Pins 2 & 3 closed
Watchdog timer uses ADS strobe	JP12	Pins 1 & 2 closed
í Monitor type select color	SW1/1	On
Monitor type select monochrome	SW1/1	Off
í Flash BIOS enabled	SW1/2	Off
Flash BIOS disabled	SW1/2	On
í CMOS memory normal operation	SW1/3	Off
CMOS memory clear	SW1/3	On
í Factory configured - do not alter	SW1/4	Unidentified

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
24MB	(2) 2M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
40MB	(2) 4M x 36	(2) 1M x 36
48MB	(2) 4M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
72MB	(2) 8M x 36	(2) 1M x 36
96MB	(2) 8M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

CACHE CONFIGURATION
Note: 256KB cache is factory installed and is not configurable.

CACHE JUMPER CONFIGURATION				
Size	JP1	JP2	JP6	JP7
256KB	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed	Pins 2 & 3 closed