
## CSS LABORATORIES, INC. PB-41900

Processor Processor Speed I/O Options Unidentified Unidentified

Bridge slot, CPU slot, PS/2 mouse interfaces (4)

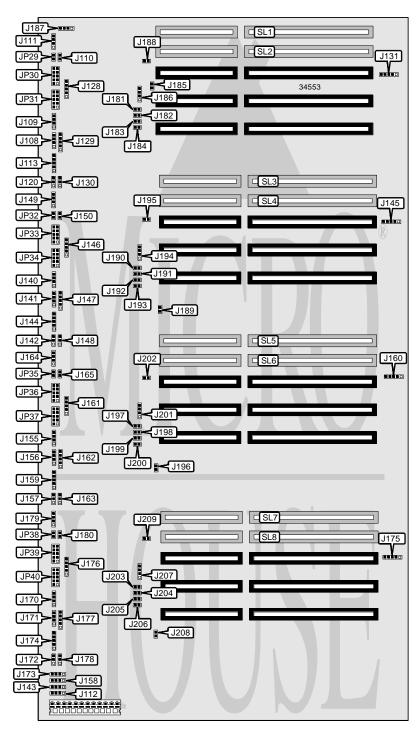

## CSS LABORATORIES, INC. PB-41900

. . . continued from previous page

CONNECTIONS				
Purpose	Location	Purpose	Location	
IDE interface LED	J108	Power LED	J186	
Speaker	J109	Power LED	J194	
Reset switch	J111/pins 1 & 2	Power LED	J201	
Turbo switch	J111/pins 3 & 4	Power LED	J207	
External battery	J112	Controller IDE interface LED	JP29	
Keylock	J113	Front panel connector	JP30	
Speaker	J140	PS/2 mouse interface	JP31	
IDE interface LED	J141	Controller IDE interface LED	JP32	
External battery	J143	Front panel connector	JP33	
Keylock	J144	PS/2 mouse interface	JP34	
Reset switch	J149/pins 1 & 2	Controller IDE interface LED	JP35	
Turbo switch	J149/pins 3 & 4	Front panel connector	JP36	
Speaker	J155	PS/2 mouse interface	JP37	
IDE interface LED	J156	Controller IDE interface LED	JP38	
External battery	J158	Front panel connector	JP39	
Keylock	J159	PS/2 mouse interface	JP40	
Reset switch	J164/pins 1 & 2	CPU card slot	SL1	
Turbo switch	J164/pins 3 & 4	Bridge slot	SL2	
Speaker	J170	Bridge slot	SL3	
IDE interface LED	J171	CPU card slot	SL4	
External battery	J173	Bridge slot	SL5	
Keylock	J174	CPU card slot	SL6	
Reset switch	J179/pins 1 & 2	Bridge slot	SL7	
Turbo switch	J179/pins 3 & 4	CPU card slot	SL8	

USER CONFIGURABLE SETTINGS				
Function	Label	Position		
í Factory configured - do not alter	J110	Closed		
í Factory configured - do not alter	J120	Open		
í Factory configured - do not alter	J128	Open		
í Factory configured - do not alter	J129	Open		
í Factory configured - do not alter	J130	Open		
í Factory configured - do not alter	J131	Open		
í Factory configured - do not alter	J142	Open		
í Factory configured - do not alter	J145	Open		
í Factory configured - do not alter	J146	Open		
í Factory configured - do not alter	J147	Open		
í Factory configured - do not alter	J148	Open		
í Factory configured - do not alter	J150	Closed		
í Factory configured - do not alter	J157	Open		
í Factory configured - do not alter	J160	Open		
í Factory configured - do not alter	J161	Open		
í Factory configured - do not alter	J162	Open		
í Factory configured - do not alter	J163	Open		
í Factory configured - do not alter	J165	Closed		

Continued on next page. . .

## CSS LABORATORIES, INC. PB-41900

. . . continued from previous page

USER CONFIGURABLE SETTINGS (CON'T)				
Function	Label	Position		
í Factory configured - do not alter	J172	Open		
í Factory configured - do not alter	J175	Open		
í Factory configured - do not alter	J176	Open		
í Factory configured - do not alter	J177	Open		
í Factory configured - do not alter	J178	Open		
í Factory configured - do not alter	J180	Closed		
í Factory configured - do not alter	J181	Closed		
í Factory configured - do not alter	J182	Closed		
í Factory configured - do not alter	J183	Closed		
í Factory configured - do not alter	J184	Closed		
í Factory configured - do not alter	J185	Open		
í Factory configured - do not alter	J187	Open		
í Factory configured - do not alter	J188	Open		
í Factory configured - do not alter	J189	Open		
í Factory configured - do not alter	J190	Closed		
í Factory configured - do not alter	J191	Closed		
í Factory configured - do not alter	J192	Closed		
í Factory configured - do not alter	J193	Closed		
í Factory configured - do not alter	J195	Open		
í Factory configured - do not alter	J196	Open		
í Factory configured - do not alter	J197	Closed		
í Factory configured - do not alter	J198	Closed		
í Factory configured - do not alter	J199	Closed		
í Factory configured - do not alter	J200	Closed		
í Factory configured - do not alter	J202	Open		
í Factory configured - do not alter	J203	Closed		
í Factory configured - do not alter	J204	Closed		
í Factory configured - do not alter	J205	Closed		
í Factory configured - do not alter	J206	Closed		
í Factory configured - do not alter	J208	Open		
í Factory configured - do not alter	J209	Open		