


# SUPER MICRO P6SKS

<b>Processor</b>	Pentium Pro/Pentium II
<b>Processor Speed</b>	150/166/180/200/233/266/300/333/366/400MHz
<b>Chip Set</b>	Intel
<b>Video Chip Set</b>	None
<b>Maximum Onboard Memory</b>	768MB (EDO supported)
<b>Maximum Video Memory</b>	None
<b>Cache</b>	256/512KB (located on Pentium Pro/Pentium II CPU)
<b>BIOS</b>	AMI
<b>Dimensions</b>	305mm x 244mm
<b>I/O Options</b>	32-bit PCI slots (4), floppy drive interface, IDE interfaces (2), Ultra Wide SCSI interface, Ultra SCSI interface, parallel port, PS/2 mouse port, serial ports (2), IR connector, USB connector, ATX power connector
<b>NPU Options</b>	None

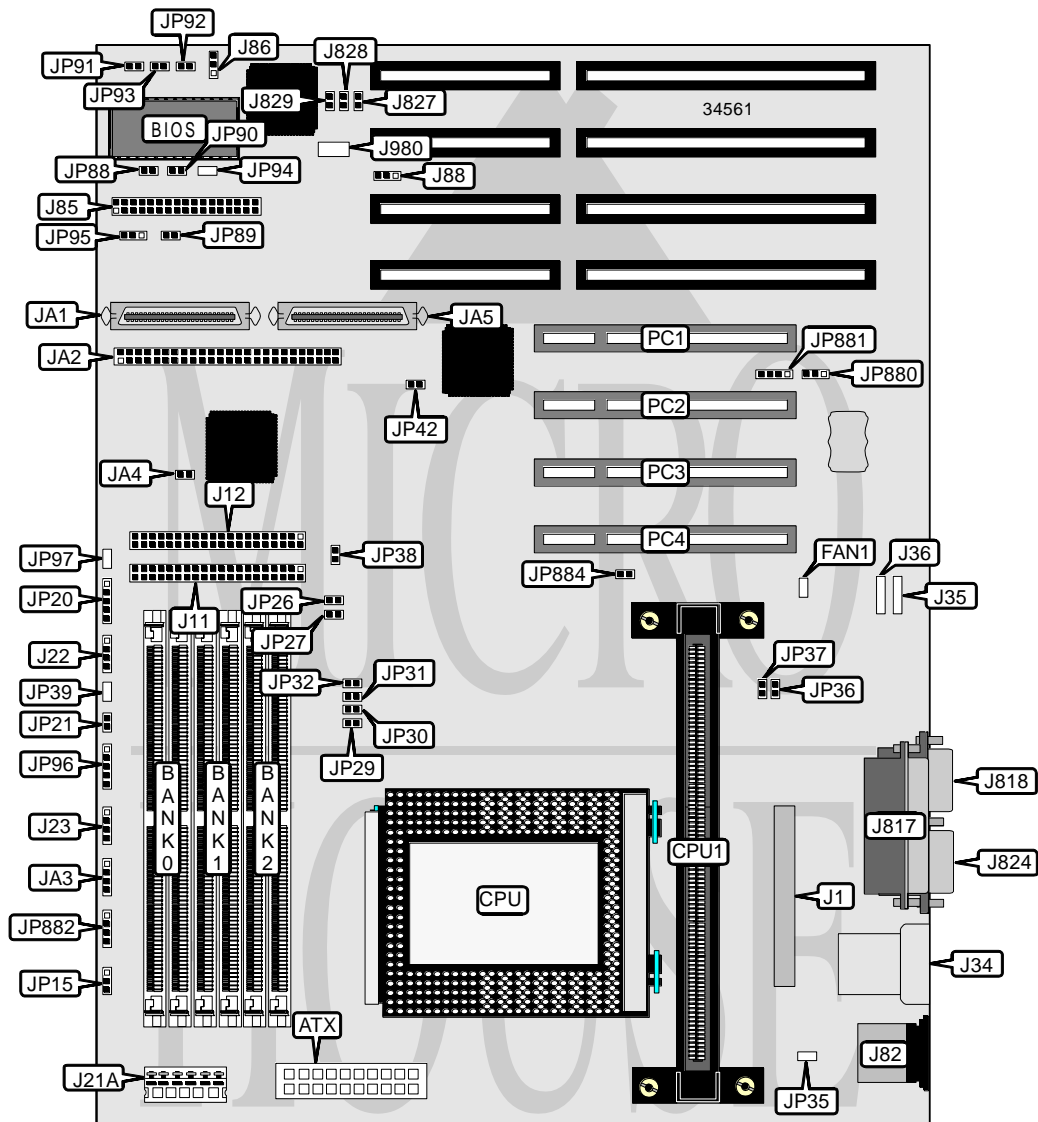

*Continued on next page . . .*

# SUPER MICRO P6SKS

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
ATX power connector	ATX	Ultra SCSI interface	JA2
Chassis fan power	FAN1	SCSI interface LED	JA3
Chassis fan power	FAN2	Ultra SCSI interface - external	JA5
IDE interface 1	J11	Power LED & keylock	JP20
IDE interface 2	J12	Reset switch	JP21
3.3v power	J21A	Green PC connector	JP39
Speaker	J22	Fan replacement buzzer	JP89
IDE interface LED	J23	Overheat LED	JP90
USB connector	J34	Backup cooling fan power	JP91
PS/2 mouse port	J82	Backup cooling fan power	JP92
Floppy drive interface	J85	Backup cooling fan power	JP93
Parallel port	J817	IR connector	JP96
Serial port 1	J818	External battery	JP881
Serial port 2	J824	Soft off power supply	JP882
Ultra Wide SCSI interface	JA1	32-bit PCI slots	PC1 – PC4

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	J1	Unidentified
í Factory configured - do not alter	J35	Unidentified
í Factory configured - do not alter	J36	Unidentified
í Factory configured - do not alter	J86	Pins 1 & 2 closed
í Factory configured - do not alter	J88	Pins 1 & 2 closed
í Factory configured - do not alter	J827	Closed
í Factory configured - do not alter	J828	Closed
í Factory configured - do not alter	J829	Closed
í Factory configured - do not alter	J980	Unidentified
í Factory configured - do not alter	JA4	Open
í Factory configured - do not alter	JP15	Pins 2 & 3 closed
í Factory configured - do not alter	JP26	Open
í Factory configured - do not alter	JP27	Closed
í Factory configured - do not alter	JP35	Unidentified
í Factory configured - do not alter	JP38	Open
í ISA CLK = PCI CLK/4	JP42	Closed
ISA CLK = PCI CLK/3	JP42	Open
í Buzzer control select standby	JP88	Closed
Buzzer control select disabled	JP88	Open
í Factory configured - do not alter	JP94	Unidentified
í Factory configured - do not alter	JP97	Unidentified
í CMOS memory normal operation	JP880	Pins 1 & 2 closed
CMOS memory clear	JP880	Pins 2 & 3 closed

Continued on next page...

SUPER MICRO  
P6SKS

... continued from previous page

SIMM CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
8MB	(2) 1M x 36	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None
16MB	(2) 2M x 36	None	None
24MB	(2) 2M x 36	(2) 1M x 36	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None	None
32MB	(2) 2M x 36	(2) 2M x 36	None
40MB	(2) 4M x 36	(2) 1M x 36	None
48MB	(2) 4M x 36	(2) 2M x 36	None
48MB	(2) 4M x 36	(2) 1M x 36	(2) 1M x 36
56MB	(2) 4M x 36	(2) 2M x 36	(2) 1M x 36
64MB	(2) 8M x 36	None	None
64MB	(2) 4M x 36	(2) 4M x 36	None
80MB	(2) 8M x 36	(2) 2M x 36	None
80MB	(2) 8M x 36	(2) 1M x 36	(2) 1M x 36
88MB	(2) 8M x 36	(2) 2M x 36	(2) 1M x 36
96MB	(2) 8M x 36	(2) 4M x 36	None
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
96MB	(2) 8M x 36	(2) 2M x 36	(2) 2M x 36
104MB	(2) 8M x 36	(2) 4M x 36	(2) 1M x 36
112MB	(2) 8M x 36	(2) 4M x 36	(2) 2M x 36
128MB	(2) 8M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 16M x 36	None	None
128MB	(2) 8M x 36	(2) 8M x 36	None
136MB	(2) 16M x 36	(2) 1M x 36	None
144MB	(2) 16M x 36	(2) 2M x 36	None
144MB	(2) 16M x 36	(2) 1M x 36	(2) 1M x 36
152MB	(2) 16M x 36	(2) 2M x 36	(2) 1M x 36
160MB	(2) 16M x 36	(2) 4M x 36	None
160MB	(2) 16M x 36	(2) 2M x 36	(2) 2M x 36
192MB	(2) 16M x 36	(2) 8M x 36	None
208MB	(2) 16M x 36	(2) 8M x 36	(2) 2M x 36
224MB	(2) 16M x 36	(2) 8M x 36	(2) 4M x 36
256MB	(2) 16M x 36	(2) 16M x 36	None
256MB	(2) 16M x 36	(2) 8M x 36	(2) 8M x 36
256MB	(2) 32M x 36	None	None
264MB	(2) 16M x 36	(2) 16M x 36	(2) 1M x 36
272MB	(2) 16M x 36	(2) 16M x 36	(2) 2M x 36
288MB	(2) 16M x 36	(2) 16M x 36	(2) 4M x 36
320MB	(2) 16M x 36	(2) 16M x 36	(2) 8M x 36
384MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36
512MB	(2) 32M x 36	(2) 32M x 36	None
768MB	(2) 32M x 36	(2) 32M x 36	(2) 32M x 36

Note: Board accepts EDO memory.

Continued on next page...

# SUPER MICRO P6SKS

... continued from previous page

## CACHE CONFIGURATION

Note: 256KB/512KB cache is located on the Pentium Pro/Pentium II CPU.

## CPU SPEED SELECTION (PENTIUM II)

CPU speed	JP29	JP30	JP31	JP32	JP36	JP37
233MHz	Open	Open	Closed	Closed	Open	Closed
266MHz	Closed	Closed	Open	Closed	Open	Closed
300MHz	Open	Closed	Open	Closed	Open	Closed
333MHz	Closed	Open	Open	Closed	Open	Closed
366MHz	Open	Open	Open	Closed	Open	Closed
400MHz	Closed	Closed	Closed	Open	Open	Closed

## CPU SPEED SELECTION (PENTIUM PRO)

CPU speed	JP29	JP30	JP31	JP32	JP36	JP37
150MHz	Open	Closed	Closed	Closed	Closed	Open
166MHz	Open	Closed	Closed	Closed	Open	Closed
180MHz	Closed	Open	Closed	Closed	Closed	Open
200MHz	Closed	Open	Closed	Closed	Open	Closed

## CPU TYPE SELECTION

Type	JP884
Pentium II	Open
Pentium Pro	Closed

## THERMAL CONTROL SELECTION

Temperature	JP95
46C	Pins 1 & 2 closed
í 68C	Pins 2 & 3 closed

Note: Depending on temperature selected, a backup fan or alarm will sound, letting user know the system is overheating.