


COMPAQ COMPUTER CORPORATION

PRESARIO 7200/7600

Processor	Pentium
Processor Speed	75/100/120/133/150/166/200MHz
Chip Set	Unidentified
Video Chip Set	Unidentified
Maximum Onboard Memory	128MB (EDO supported)
Maximum Video Memory	2MB
Cache	256KB
BIOS	Unidentified
Dimensions	330mm x 218mm
I/O Options	Unidentified
NPU Options	None

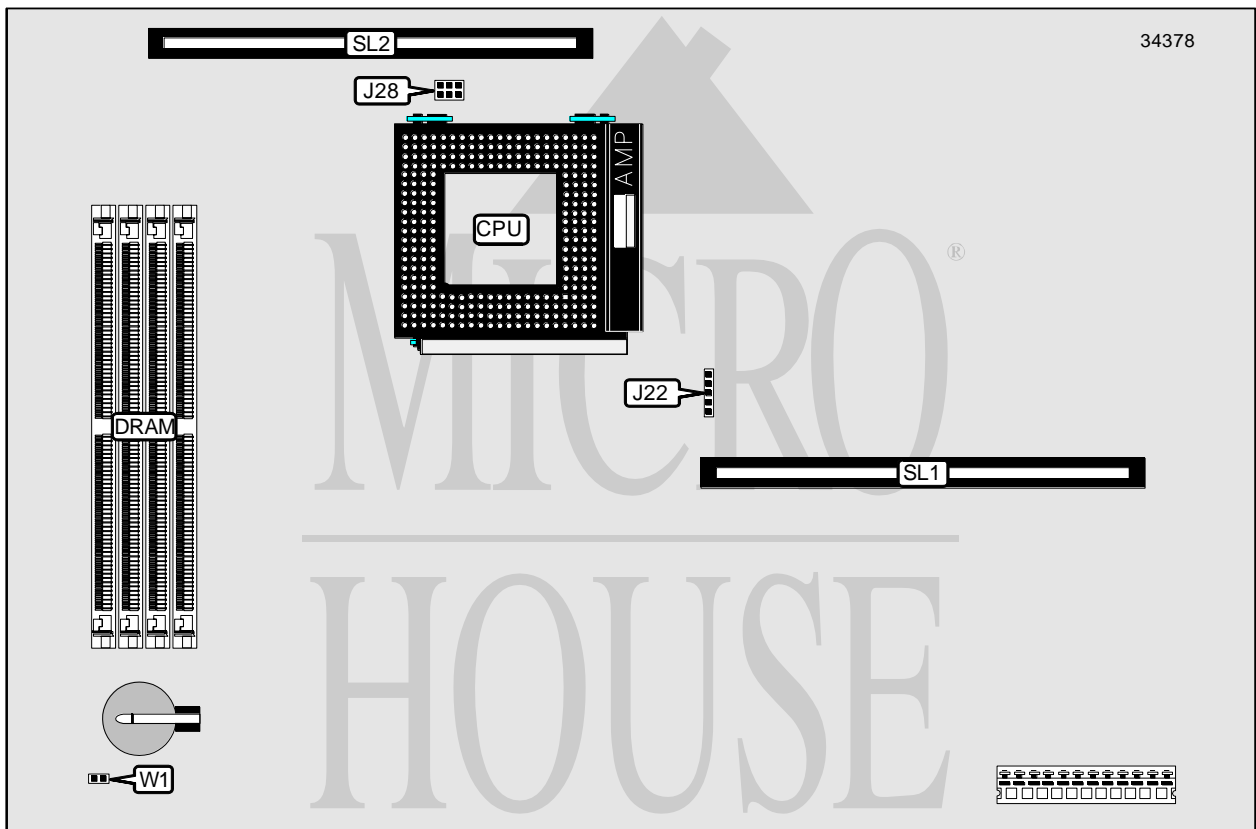

THE LOCATION OF ALL JUMPERS, SWITCHES AND I/O CONNECTORS ARE UNIDENTIFIED

CONNECTIONS			
Purpose	Location	Purpose	Location
Riser slot	SL1	Cache slot	SL2
Note: The location and types of all other I/O options are unidentified.			

Continued on next page. . .

COMPAQ COMPUTER CORPORATION
 PRESARIO 7200/7600

... continued from previous page

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í CMOS memory normal operation	W1	Closed
CMOS memory clear	W1	Open

DRAM CONFIGURATION		
Size	Bank 0	Bank 1
8MB	(2) 1M x 36	None
16MB	(2) 2M x 36	None
16MB	(2) 1M x 36	(2) 1M x 36
32MB	(2) 4M x 36	None
32MB	(2) 2M x 36	(2) 2M x 36
64MB	(2) 8M x 36	None
64MB	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36

Note: Board accepts EDO memory.

CACHE CONFIGURATION	
Size	TAG
256KB	256KB module installed

VIDEO MEMORY CONFIGURATION
Note: Board is factory installed with 1MB. A 1MB upgrade is available. The location is unidentified.

CPU SPEED SELECTION				
CPU speed	Clock speed	Multiplier	J22	J28
75MHz	50MHz	1.5x	1 & 2	1 & 3, 2 & 4
100MHz	66MHz	1.5x	4 & 5	1 & 3, 2 & 4
120MHz	60MHz	2x	3 & 4	2 & 4, 3 & 5
133MHz	66MHz	2x	4 & 5	2 & 4, 3 & 5
150MHz	60MHz	2.5x	3 & 4	2 & 5, 4 & 6
166MHz	66MHz	2.5x	4 & 5	2 & 5, 4 & 6
200MHz	66MHz	3x	4 & 5	1 & 3, 4 & 6

Note: Pins designated should be in the closed position.