


# DELL COMPUTER CORPORATION POWEREDGE XE 51XX-2 (VER. 1)

<b>Processor</b>	Pentium
<b>Processor Speed</b>	75MHz
<b>Chip Set</b>	Unidentified
<b>Video Chip Set</b>	ATI
<b>Maximum Onboard Memory</b>	512MB
<b>Maximum Video Memory</b>	2MB
<b>Cache</b>	256/512KB
<b>BIOS</b>	Unidentified
<b>Dimensions</b>	330mm x 218mm
<b>I/O Options</b>	Floppy drive interface, IDE interface, parallel port, PS/2 mouse port, serial ports (2), VESA feature connector, VGA port, riser slot, cache slot
<b>NPU Options</b>	None

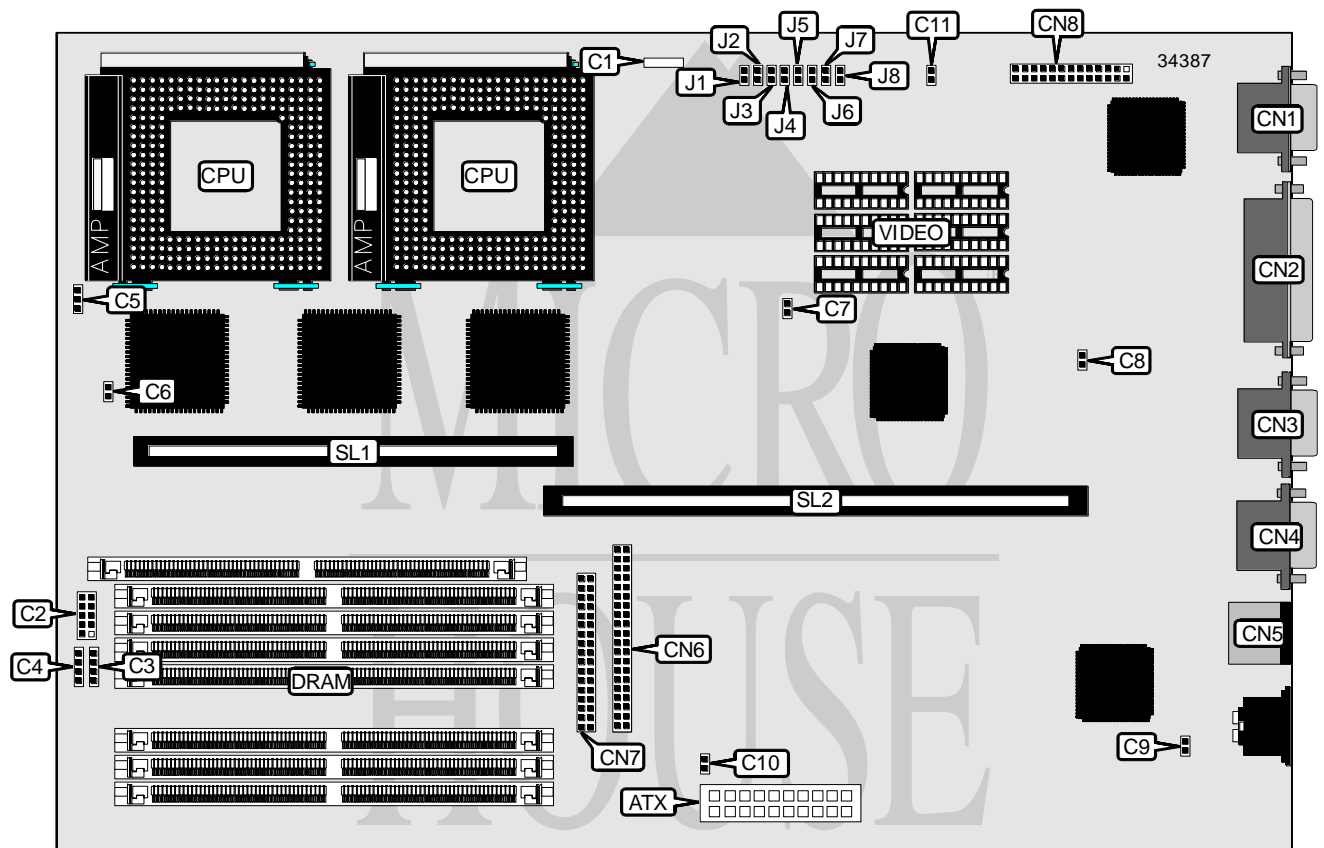

*Continued on next page . . .*

DELL COMPUTER CORPORATION  
 POWEREDGE XE 51XX-2 (VER. 1)

... continued from previous page

CONNECTIONS			
Purpose	Location	Purpose	Location
ATX power connector	ATX	Serial port 2	CN3
IDE interface LED	C1	Serial port 1	CN4
Front panel connector	C2	PS/2 mouse port	CN5
Speaker	C3	IDE interface	CN6
External battery	C4	Floppy drive interface	CN7
Chassis fan power	C5	VESA feature connector	CN8
VGA port	CN1	Cache slot	SL1
Parallel port	CN2	Riser slot	SL2

USER CONFIGURABLE SETTINGS		
Function	Label	Position
í Factory configured - do not alter	C6	Unidentified
í Factory configured - do not alter	C7	Unidentified
í Factory configured - do not alter	C8	Unidentified
í Factory configured - do not alter	C9	Unidentified
í Factory configured - do not alter	C10	Unidentified
í Factory configured - do not alter	J1	Unidentified
í Factory configured - do not alter	J2	Unidentified
í Factory configured - do not alter	J3	Unidentified
í On board video enabled	J4	Closed
On board video disabled	J4	Open
í Factory configured - do not alter	J5	Closed
í Factory configured - do not alter	J6	Closed
í Flash BIOS update enabled	J7	Closed
Flash BIOS update disabled	J7	Open
í Password enabled	J8	Closed
Password disabled	J8	Open

DRAM CONFIGURATION				
Size	Bank 0	Bank 1	Bank 2	Bank 3
8MB	(2) 1M x 36	None	None	None
16MB	(2) 1M x 36	(2) 1M x 36	None	None
16MB	(2) 2M x 36	None	None	None
24MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	None
32MB	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36	(2) 1M x 36
32MB	(2) 2M x 36	(2) 2M x 36	None	None
32MB	(2) 4M x 36	None	None	None
48MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	None
64MB	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36	(2) 2M x 36
64MB	(2) 4M x 36	(2) 4M x 36	None	None
64MB	(2) 8M x 36	None	None	None

Continued on next page. . .

DELL COMPUTER CORPORATION  
 POWEREDGE XE 51XX-2 (VER. 1)

... continued from previous page

DRAM CONFIGURATION (CON'T)				
Size	Bank 0	Bank 1	Bank 2	Bank 3
96MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36	None
128MB	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36	(2) 4M x 36
128MB	(2) 8M x 36	(2) 8M x 36	None	None
128MB	(2) 16M x 36	None	None	None
192MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36	None
256MB	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36	(2) 8M x 36
256MB	(2) 16M x 36	(2) 16M x 36	None	None
384MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36	None
512MB	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36	(2) 16M x 36
Note: The location of the banks is unidentified.				

CACHE CONFIGURATION	
Size	SL1
256KB	256KB module installed
512KB	512KB module installed

VIDEO MEMORY CONFIGURATION			
Size	Bank 0	Bank 1	Bank 2
512KB	512KB	None	None
1MB	512KB	(2) 256K x 8	None
2MB	512KB	(2) 256K x 8	(2) 256K x 8
Note: The location of the banks is unidentified.			